



SPOTLIGHT & DOWNLIGHT

2025 Brochure



CONTENTS

PP Series

PL Series

Ray Series

Pure Series

Starry Series

PS Series

PC Series

RainShine Series

CloudWhite Series


CloudLight Series

PP Series

Spotlight & Downlight

Beyond Light, To the Last Details..



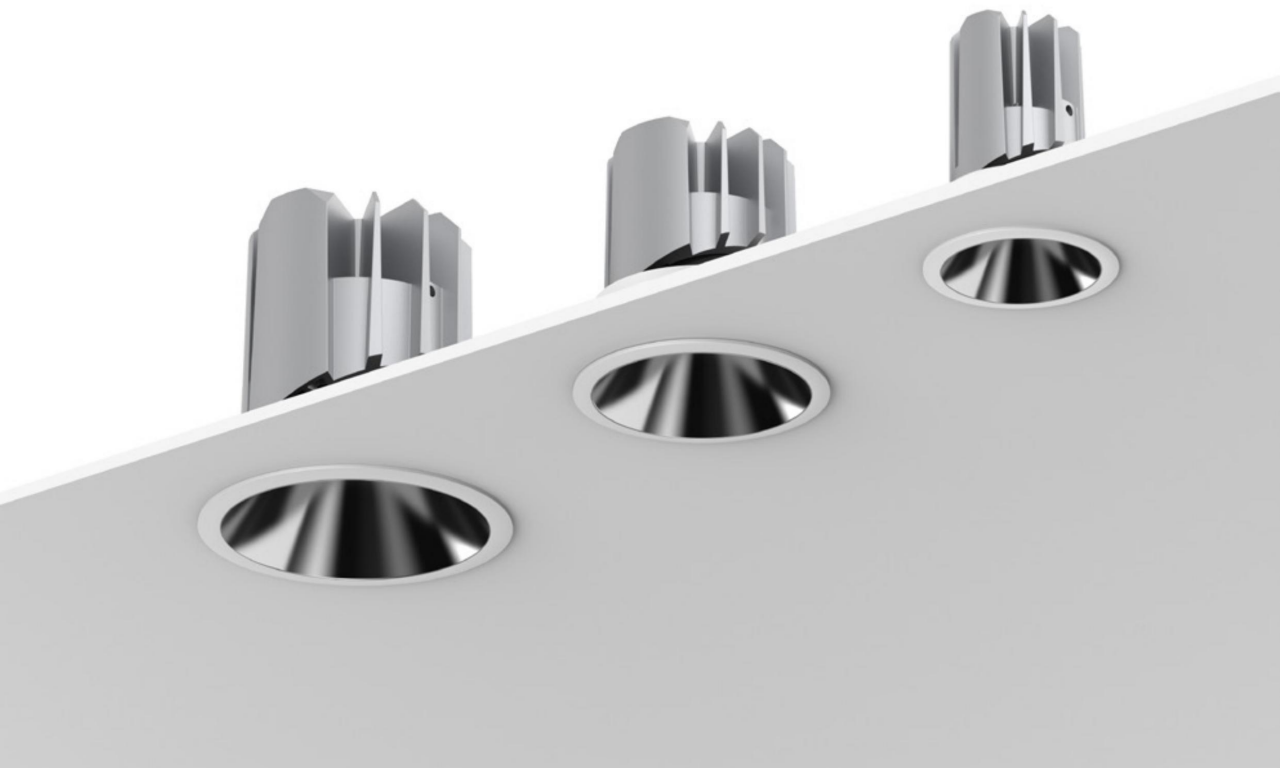

Three kinds of hole openings

55/75/95 three specifications to meet the installation requirements of different scenarios.


Adjustable angle

The lamp body to a maximum angle of 30°
Easy switching between direct illumination mode / wall washing mode.



Rotatable

Rotate the light body, can be rotated horizontally 355°, easy to adjust the lighting Angle.

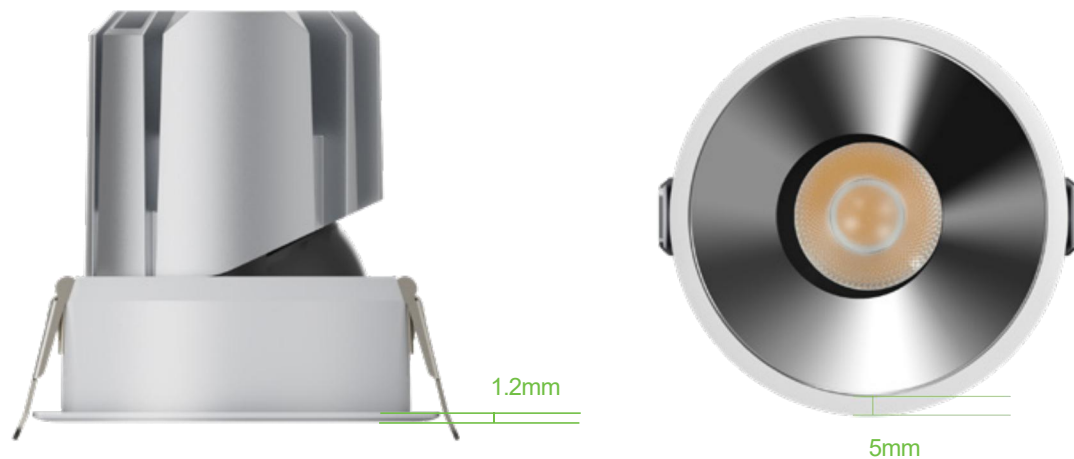

Ultra-thin design

Ultra-thin design, frame narrow to 5mm, thickness 1.2mm.making the ceiling and lighting fixtures more integrated.

Available in 6 colors

Suitable for different decoration environments
The reflector is precisely designed with electroplating (anti UV)
and nano paint technology,
which is suitable for different soft decoration environments



Specification

 10°/15°/24°/36°/50°  IP20



LI100902E55
Power: 9W
Size(WxH): Ø62x85mm
Cutout: Ø55



LI100903E55
Power: 9W
Size(WxH): Ø65x86mm
Cutout: Ø55



LI100902YT55
Power: 9W
Size(WxH): Ø85x85mm
Cutout: Ø55



LI100902P55
Power: 9W
Size(WxH): 68x68x86.5mm
Cutout: 60x60mm



LI100902P55-2
Power: 9W
Size(WxH): 135x68x86.5mm
Cutout: 128x60mm



LI100902P55-3
Power: 3x9W
Size(WxH): 202x68x86.5mm
Cutout: 195x60mm



LI100902PT55
Power: 9W
Size(WxH): 138x65x86.5mm
Cutout: 65x65mm



LI100902PT55-2
Power: 2x9W
Size(WxH): 205x60x86.5mm
Cutout: 133x65mm



LI100902PT55-3
Power: 3x9W
Size(WxH): 272x60x86.5mm
Cutout: 200x65mm



LI100902E75
Power: 13W
Size(WxH): Ø82x85mm
Cutout: Ø75mm



LI100903E75
Power: 13W
Size(WxH): Ø85x84.5mm
Cutout: Ø75mm



LI100902YT75
Power: 13W
Size(WxH): Ø108x85mm
Cutout: Ø75mm



LI100902P75
Power: 13W
Size(WxH): 85x85x86.5mm
Cutout: 75x75mm



LI100902P75-2
Power: 2x13W
Size(WxH): 160x85x86.5mm
Cutout: 155x75mm



LI100902PT75
Power: 13W
Size(WxH): 129x75x86.5mm
Cutout: 75x75mm



LI100902PT75-2
Power: 2x13W
Size(WxH): 204x75x86.5mm
Cutout: 155x75mm



LI100902E95
Power: 25W
Size(WxH): Ø105x115mm
Cutout: Ø95mm




LI100902YT95
Power: 25W
Size(WxH): Ø128x115mm
Cutout: Ø95mm

PL Series


Spotlight & Downlight

Beyond Light, To the Last Details..

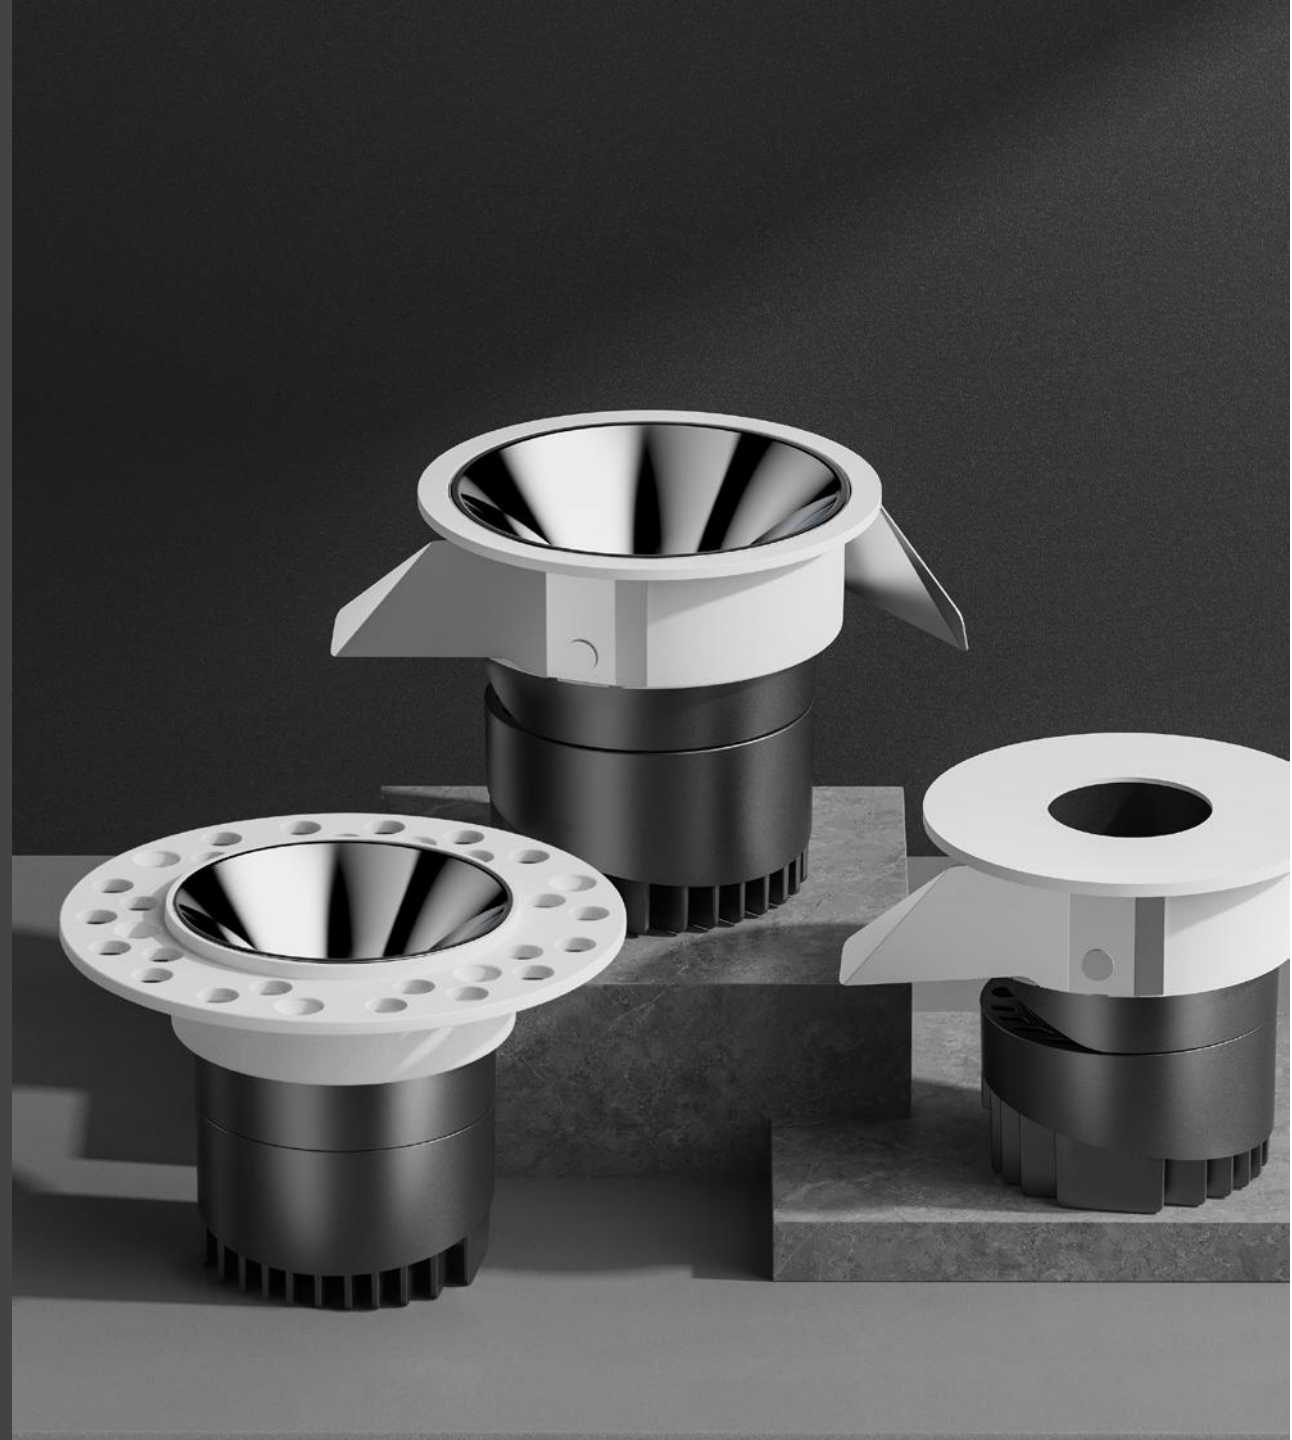


Radiator simulation

Die-casting aluminum heat dissipation structure, the heat is derived from the inner hole of the heatsink, and when the air flow rises from the inner hole, the heat is exported with the air.

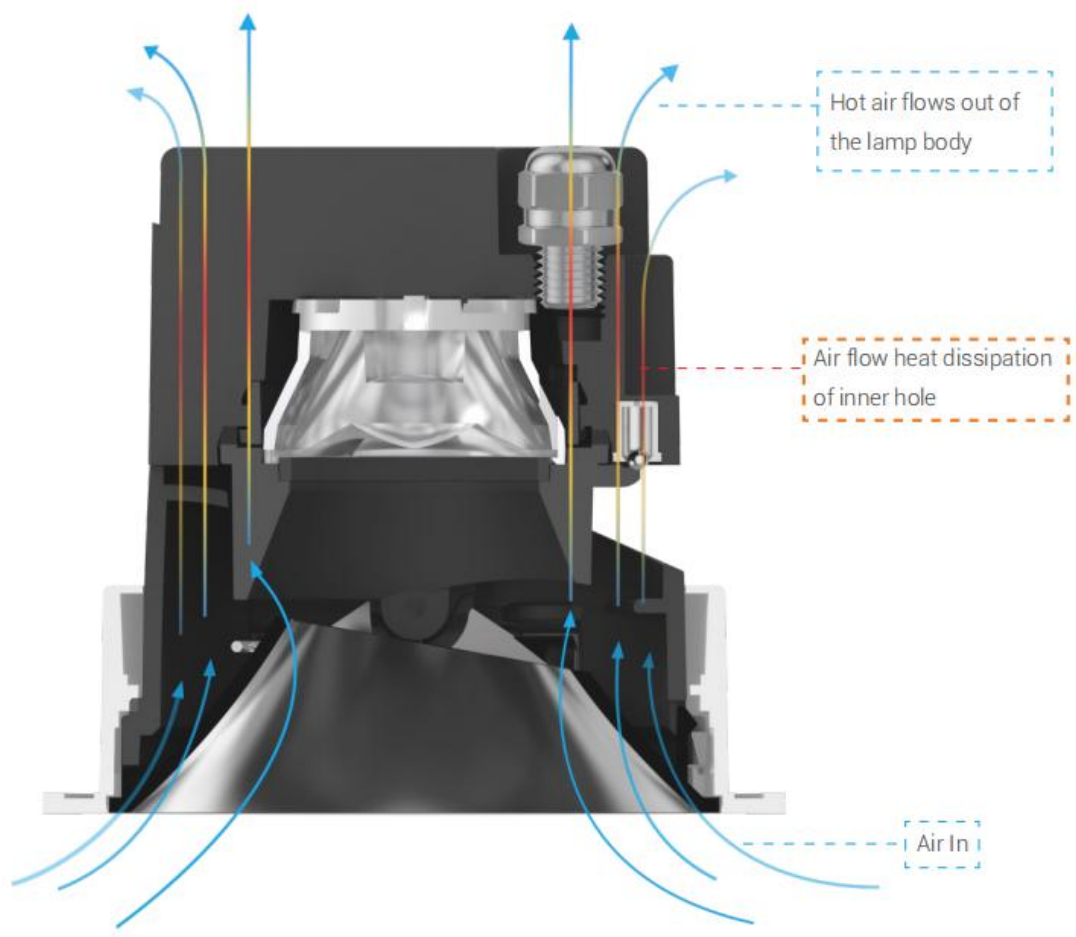

0~30°

Stepless regulation 0~30° at any angle

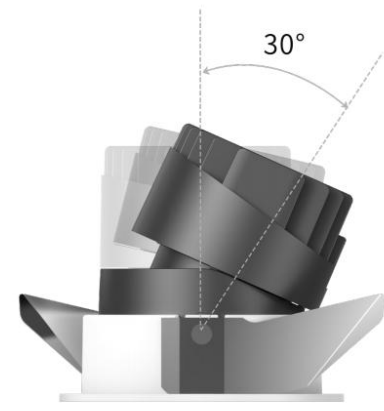


Horizontal rotation of 355°


Horizontal rotation of 355°, with positioning point, damping to Fool-proof and prevent winding.



Easy Installation

A variety of springs are available for quick installation, suitable for various ceiling thicknesses

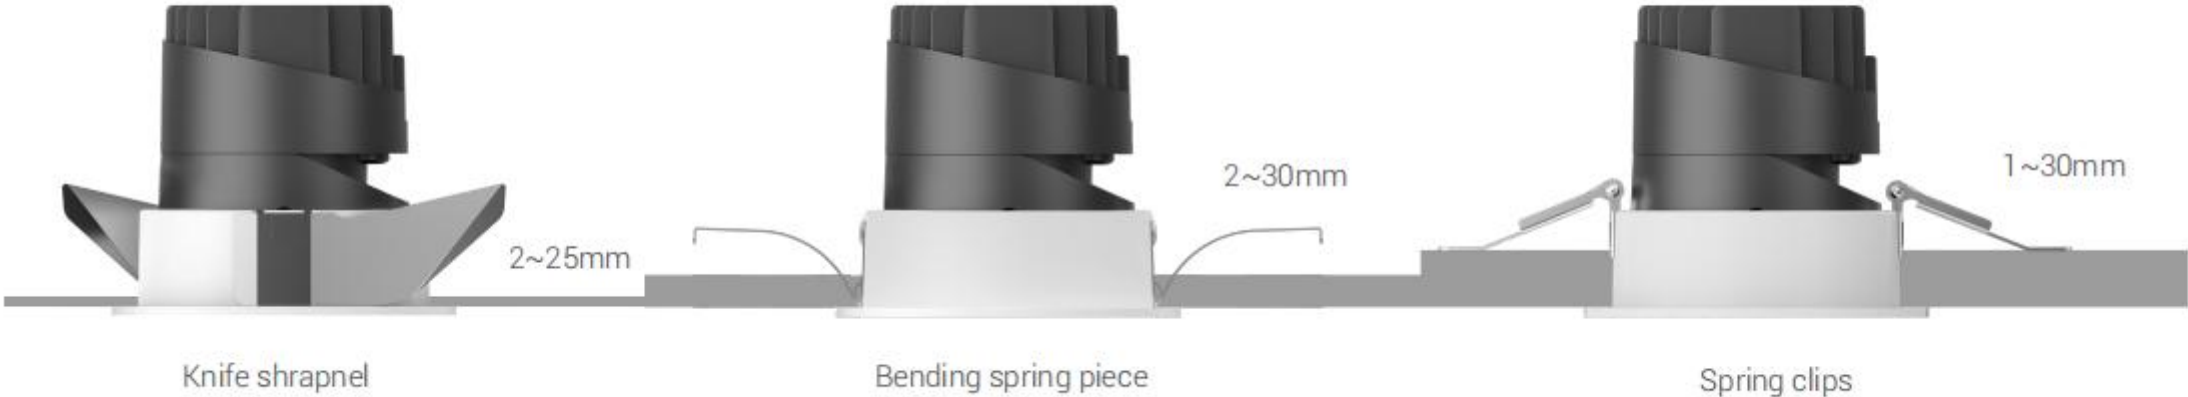

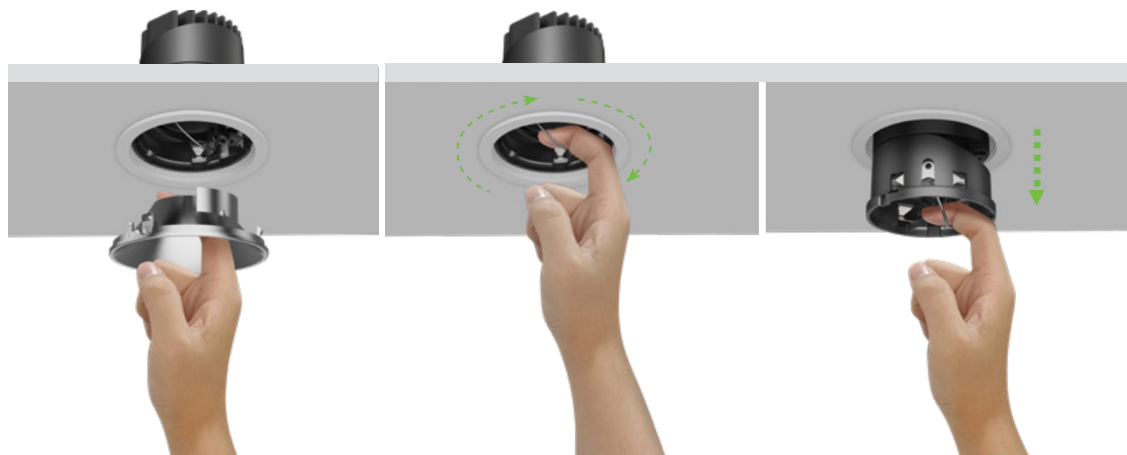

①

Take out reflector cover

②

Take out reflector cover

③


Take out reflector cover



Unique Pull Handle Design

Pull ring design, convenient for tank adjustment and disassembly

Double-layer Shockproof Role

After rotating the front ring to the correct position, the metal pinball will automatically pop out into the groove, fasten the heatsink, and play a double-layer shockproof role with the silicone ring

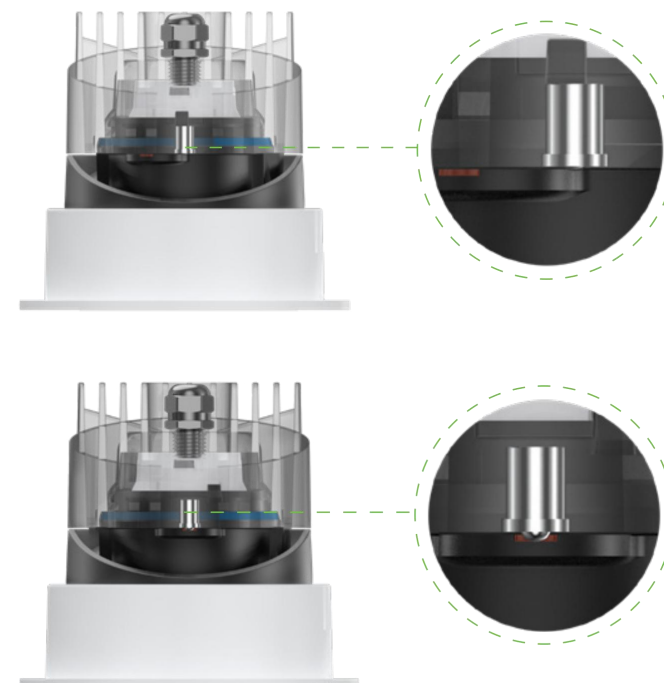

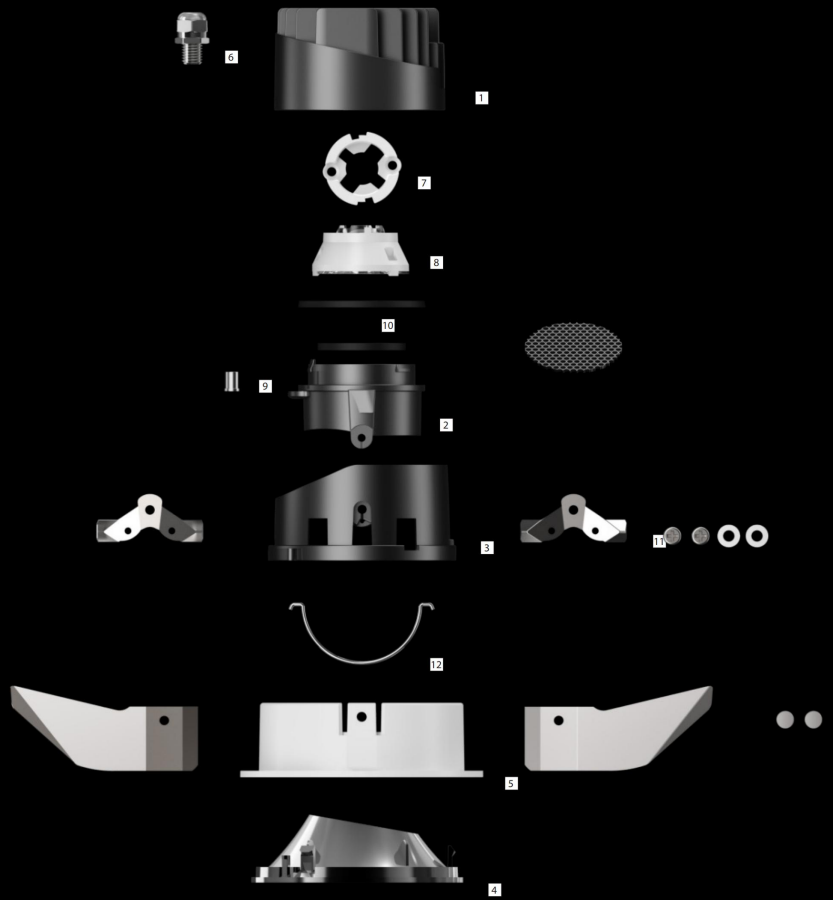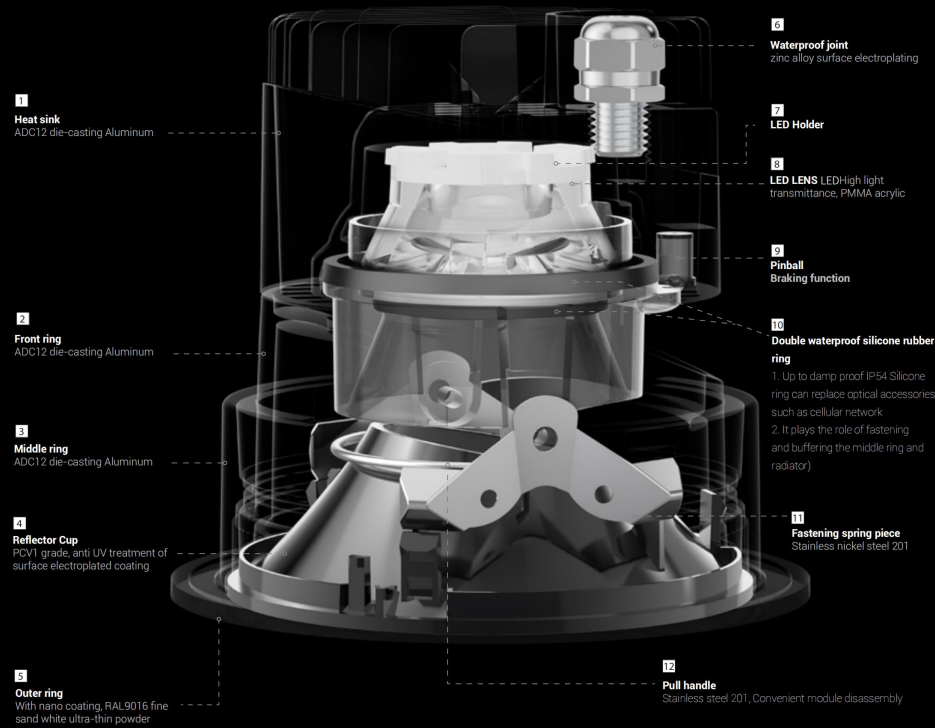

Specification

CRI ≥80/≥90



IP20



LI100301E55-60
Power: 6W
Size(WxH):65x75mm
Cutout: Φ55-60mm
10°/15°/24°/38°



LI100302E55-60
Power: 6W
Size(WxH): 65x78mm
Cutout: Φ55-60mm
10°/15°/24°/38°



LI100303E55-60
Power: 6W
Size(WxH): 65x75mm
Cutout: Φ55-60mm
10°/15°/24°/38°



LI100304E55-60
Power: 6W
Size(WxH): 65x78mm
Cutout: Φ55-60mm
10°/15°/24°/38°



LI100301E75
Power: 12W
Size(WxH): Φ85x105mm
Cutout: Φ75mm
15°/24°/38°



LI100302E75
Power: 12W
Size(WxH):Φ85x116mm
Cutout: Φ75mm
15°/24°/38°



LI100303E75
Power: 12W
Size(WxH): Φ85x105mm
Cutout: Φ75mm
15°/24°/38°



LI100304E75
Power: 12W
Size(WxH): Φ85x116mm
Cutout: Φ75mm
15°/24°/38°



LI100305E75
Power: 12W
Size(WxH): Φ85x116mm
Cutout: Φ75mm
15°/24°/38°



LI100301E55
Power: 8W
Size(WxH):Φ63x76mm
Cutout: Φ55mm
15°/24°/36°/55°



LI100302E55
Power: 8W
Size(WxH): Φ63x78mm
Cutout: Φ55mm
15°/24°/36°/55°



LI100303E55
Power: 8W
Size(WxH): Φ63x76mm
Cutout: Φ55mm
15°/24°/36°/55°



LI100301E65
Power: 10W
Size(WxH):Φ72.5x81mm
Cutout: Φ65mm
10°/15°/ 24°/ 36°/55°



LI100302E65
Power: 10W
Size(WxH):Φ72.5x83mm
Cutout: Φ65mm
10°/15°/ 24°/ 36°/55°



LI100303E65
Power: 10W
Size(WxH):Φ72.5x81mm
Cutout: Φ65mm
10°/15°/ 24°/ 36°/55°



LI100301E95
Power: 20W
Size(WxH):Φ106x119mm
Cutout: Φ95mm
15°/ 24°/ 38°



LI100302E95
Power: 20W
Size(WxH):Φ106x126mm
Cutout: Φ95mm
15°/ 24°/ 38°



LI100303E95
Power: 20W
Size(WxH):Φ106x119mm
Cutout: Φ95mm
15°/ 24°/ 38°



LI100304E95
Power:20W
Size(WxH):Φ106x126mm
Cutout: Φ95mm
15°/ 24°/ 38°



LI100305E95
Power:20W
Size(WxH):Φ106x126mm
Cutout: Φ95mm
15°/ 24°/ 38°



LI100301E95-LENS
Power:23W
Size(WxH):Φ106x116mm
Cutout: Φ95mm
15°/ 24°/ 38°/ 60°



LI100302E95-LENS
Power:23W
Size(WxH):Φ106x123mm
Cutout: Φ95mm
15°/ 24°/ 38°/ 60°



LI100303E95-LENS
Power:23W
Size(WxH):Φ106x116mm
Cutout: Φ95mm
15°/ 24°/ 38°/ 60°



LI100304E95-LENS
Power:23W
Size(WxH):Φ106x123mm
Cutout: Φ95mm
15°/ 24°/ 38°/ 60°



LI100305E95-LENS
Power:23W
Size(WxH):Φ106x123mm
Cutout: Φ95mm
15°/ 24°/ 38°/ 60°



LI100301E120
Power:30W
Size(WxH):Φ132x145mm
Cutout: Φ120mm
15°/ 24°/ 38°



LI100302E120
Power:30W
Size(WxH):Φ132x155mm
Cutout: Φ120mm
15°/ 24°/ 38°



LI100305E120
Power:30W
Size(WxH):Φ132x155mm
Cutout: Φ120mm
15°/ 24°/ 38°



LI100301T75
Power:12W
Size(WxH):134x104mm
Cutout: Φ75mm
15°/24°/38°



LI100302T75
Power:12W
Size(WxH):134x109mm
Cutout: Φ75mm
15°/24°/38°



LI100303T75
Power:12W
Size(WxH):134x104mm
Cutout: Φ75mm
15°/24°/38°



LI100304T75
Power:12W
Size(WxH):134x109mm
Cutout: Φ75mm
15°/24°/38°



LI100305E75
Power:12W
Size(WxH):86x109mm
Cutout: Φ75mm
15°/24°/38°



LI100301T75-LENS
Power:12W
Size(WxH):134x94mm
Cutout: Φ75mm
10°/15°/24°/38°/55°



LI100302T75-LENS
Power:12W
Size(WxH):134x99mm
Cutout: Φ75mm
10°/15°/24°/38°/55°



LI100303T75-LENS
Power:12W
Size(WxH):134x94mm
Cutout: Φ75mm
10°/15°/24°/38°/55°



LI100304T75-LENS
Power:12W
Size(WxH):134x99mm
Cutout: Φ75mm
10°/15°/24°/38°/55°




LI100305T75-LENS
Power:12W
Size(WxH):134x99mm
Cutout: Φ75mm
10°/15°/24°/38°/55°

Ray Series

Spotlight & Downlight

Beyond Light, To the Last Details..

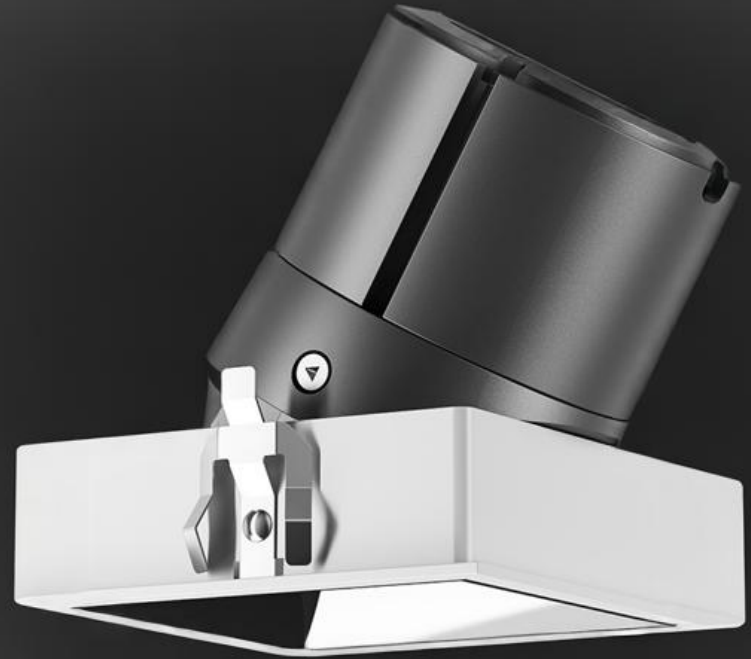



Ray Series CRI $\geq$ 98



CRI 80

Beam Angle Options

Ideal for highlighting specific areas or objects with enhanced clarity and minimal light spill.



Warm Light, Comfortable Spaces

With its 3000K color temperature, the Ray Series downlight brings a soft, inviting glow that enhances comfort and ambiance in any space. Perfect for homes, lounges, and boutique retail — where atmosphere matters most.



Pure Series

Spotlight & Downlight

Beyond Light, To the Last Details..






Pure Series CRI 98



CRI 80


Wide Beam, Seamless Illumination

A 120° beam angle offers broader light coverage, minimizing shadows and creating an even, welcoming glow — ideal for general ambient lighting in modern interiors.



CCT Options

The Pure Series is available in 3000K, 4000K, and 5000K, offering versatile color temperature options to create the ideal ambiance, from warm and cozy to bright and energizing.

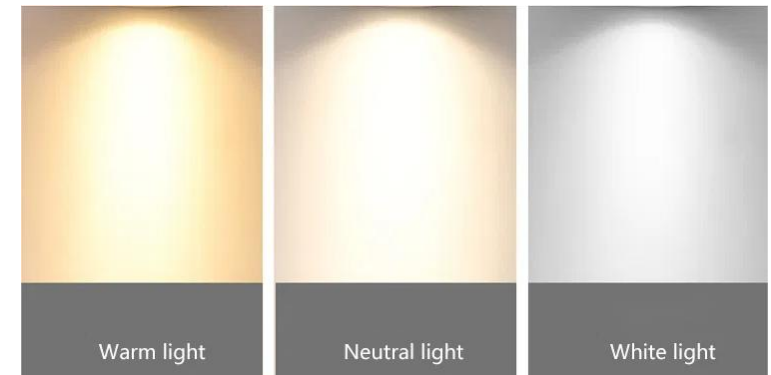


PS Series

IP65

Spotlight & Downlight

Beyond Light, To the Last Details..

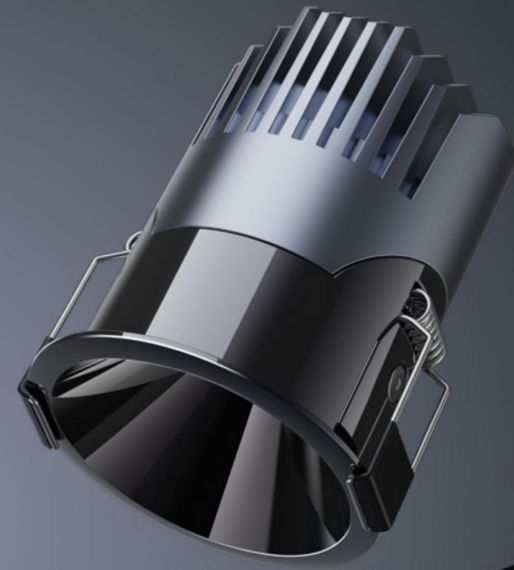




IP65 Waterproof

Not afraid of water/fog/oil/smoke can be used in the hotel, ballroom.
The lamp has passed 500 hours of salt spray testing and IP65 waterproof testing.

Ultra-thin Design




Stepless regulation 0~30° at any angle

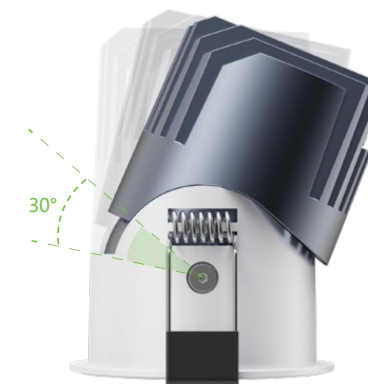

Beauty, more than one



Multi-coloured face rings ,The reflector is multi-color and can meet the needs of different occasions.The reflector is precisely designed,plated and nano spray painted Comfortable light type with high reflection efficiency and high efficiency.

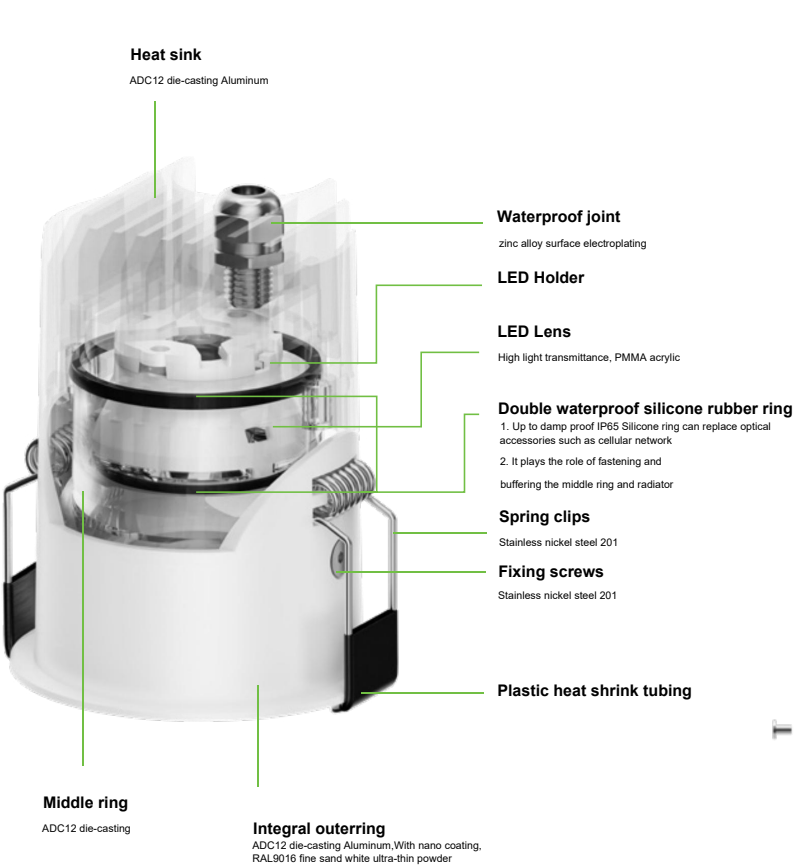



Specification



10°/15°/24°/36°/50°



IP65



LI1005E35
Power: 7W
Size(WxH): Ø40X85mm
Cutout: Ø35mm IP44



LI1005E45
Power: 7W
Size(WxH): Ø52X72mm
Cutout: Ø45mm



LI1005E55
Power: 9W
Size(WxH): Ø62X77mm
Cutout: Ø55mm



LI1005E65
Power: 12W
Size(WxH): Ø73X80mm
Cutout: Ø65mm



LI1005E75
Power: 15W
Size(WxH): Ø84X85mm
Cutout: Ø75mm



LI1005E95
Power: 30W
Size(WxH): Ø103X110mm
Cutout: Ø95mm




LI1005E120
Power: 38W
Size(WxH): Ø130X135mm
Cutout: Ø120mm

PC Series

IP65

Spotlight & Downlight


Beyond Light, To the Last Details..

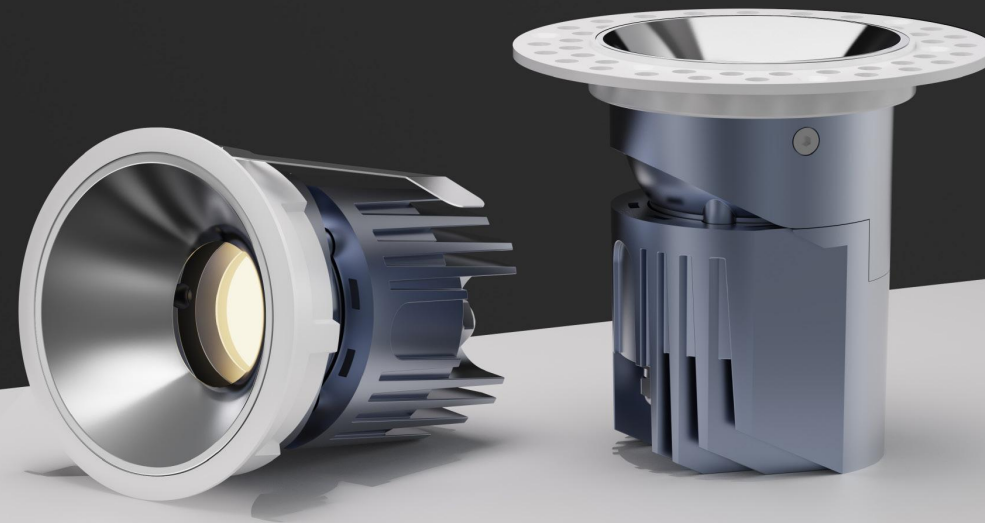

IP65 Waterproof, dustproof & fogproof


The interior of the light body is fully sealed(Double waterproof silicone rubber ring) and has undergone several + surface treatment and waterproofing processes to withstand environments such as bathrooms, kitchens and toilets that are susceptible to water, fog and fumes.



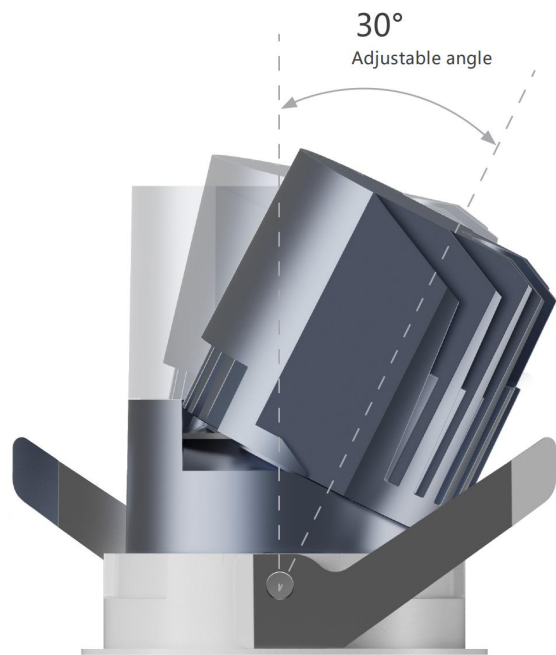

30° Adjustable angle

The maximum swing angle is 30 °
Let the light move at will and maximize the value of light effect

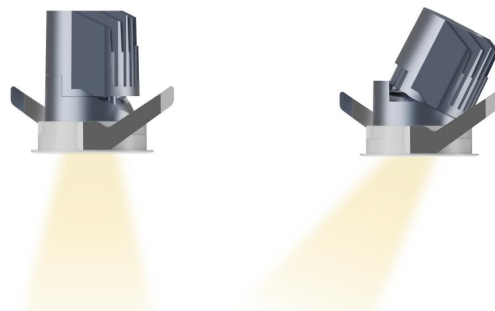

355 ° horizontal rotation

The 355 ° horizontal rotation is just right for
each degree of rotation
Realize the accurate control of beam angle and spot effect, and
endow the space with more vivid emotion

Unique Pull handle design

Pull ring design, convenient for tank adjustment and disassembly



1

Take out reflector cover



2

Rotatable adjustment




3

Pull out the module



Exhibition space

Dining space

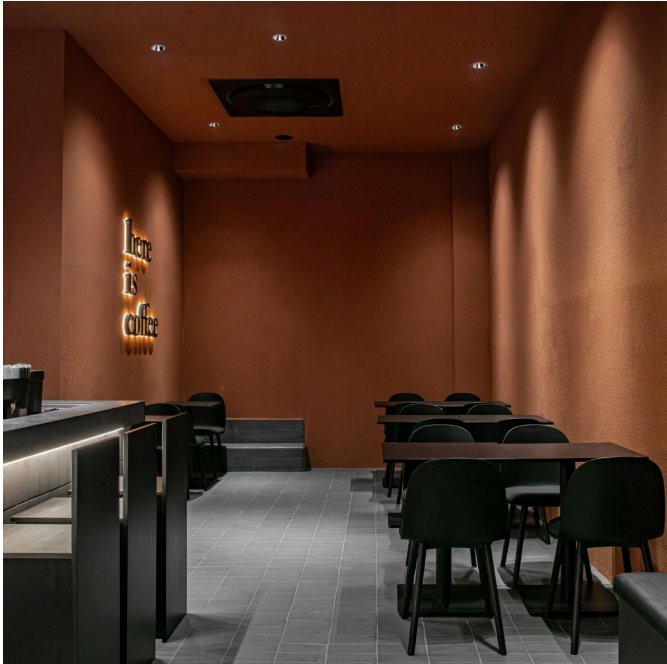

Specification

 10°/15°/24°/36°/50°

 IP65



LI1008E55-JS
Power: 10W
Size(WxH): Ø60X100mm
Cutout: Ø55mm



LI100803E55-JS
Power: 10W
Size(WxH): Ø60X100mm
Cutout: Ø55mm



LI1008YT55-JS
Power: 10W
Size(WxH): Ø86X100mm
Cutout: Ø55mm



LI1008PE55-JS
Power: 10W
Size(LxWxH): 68X68x101mm
Cutout: 60x60mm



LI1008PE55-2-JS
Power: 2x10W
Size(LxWxH): 135X68X101mm
Cutout: 128x60mm



LI1008PE55-3-JS
Power: 3x10W
Size(LxWxH): 202X68X101mm
Cutout: 195x60mm



LI1008PT55-JS
Power: 10W
Size(LxWxH): 138X60X101mm
Cutout: 65x65mm




LI1008PT55-2-JS
Power: 2X10W
Size(LxWxH): 205X60X101mm
Cutout: 133x65mm



LIRZ5406LE
Power: 3X10W
Size(LxWxH): 272X60X101mm
Cutout: 200x65mm



LI1008E75-JS
Power: 16W
Size(WxH): Ø82X95mm
Cutout: Ø75mm



LI100803E75-JS
Power: 16W
Size(WxH): Ø86X97mm
Cutout: Ø75mm



LI1008YT75-JS
Power: 16W
Size(WxH): Ø108X95mm
Cutout: Ø75mm



LI1008E95-JS
Power: 25W
Size(WxH): Ø105x130mm
Cutout: Ø95mm
15°/24°/36°/50°



LI1008YT95-JS
Power: 25W
Size(WxH): Ø128x130mm
Cutout: Ø95mm
15°/24°/36°/50°

RainShine Series

IP65

Spotlight & Downlight

Beyond Light, To the Last Details..



High Quality LED Chip

Speaking of the light source and driver, we select high-quality LED chip and strobe control driver to ensure that the light is human-friendly and harmless.



Water and dust resistant, good protective performance and can be used in outdoor with IP65 rating ability.

IP65 Waterproof



IP65 Downlight CRI>90



CRI 80

Multiple Reflector Colors



Surface mounted kit Color Options





Specification



>90



IP65



LI613077
Power: 9W
Cutout: Ø70mm
CCT: 3000K Beam Angle: 24°



LI613078
Power: 9W
Cutout: Ø70mm
CCT: 4000K Beam Angle: 24°



LI613079
Power: 9W
Cutout: Ø70mm
CCT: 5000K Beam Angle: 24°



LI613080
Power: 9W
Cutout: Ø70mm
CCT: 3000K Beam Angle: 24°



LI613081
Power: 9W
Cutout: Ø70mm
CCT: 4000K Beam Angle: 24°



LI613082
Power: 9W
Cutout: Ø70mm
CCT: 4000K Beam Angle: 24°



LI613083
Power: 15W
Cutout: Ø100mm
CCT: 3000K Beam Angle: 24°



LI613084
Power: 15W
Cutout: Ø100mm
CCT: 4000K Beam Angle: 24°



LI613085
Power: 15W
Cutout: Ø100mm
CCT: 5000K Beam Angle: 24°



LI613086
Power: 15W
Cutout: Ø100mm
CCT: 3000K Beam Angle: 24°



LI613087
Power: 15W
Cutout: Ø100mm
CCT: 4000K Beam Angle: 24°



LI613088
Power: 15W
Cutout: Ø100mm
CCT: 5000K Beam Angle: 24°



LI613089
Power: 20W
Cutout: Ø140mm
CCT: 3000K Beam Angle: 36°



LI613090
Power: 20W
Cutout: Ø140mm
CCT: 4000K Beam Angle: 36°



LI613091
Power: 20W
Cutout: Ø140mm
CCT: 5000K Beam Angle: 36°



LI613092
Power: 20W
Cutout: Ø140mm
CCT: 3000K Beam Angle: 36°



LI613093
Power: 20W
Cutout: Ø140mm
CCT: 4000K Beam Angle: 36°



LI613094
Power: 20W
Cutout: Ø140mm
CCT: 5000K Beam Angle: 36°



LI613095
Power: 37W
Cutout: Ø200mm
CCT: 3000K Beam Angle: 36°



LI613096
Power: 37W
Cutout: Ø200mm
CCT: 4000K Beam Angle: 36°



LI613097
Power: 37W
Cutout: Ø200mm
CCT: 5000K Beam Angle: 36°



LI613098
Power: 37W
Cutout: Ø200mm
CCT: 3000K Beam Angle: 36°



LI613099
Power: 37W
Cutout: Ø200mm
CCT: 4000K Beam Angle: 36°



LI613100
Power: 37W
Cutout: Ø200mm
CCT: 5000K Beam Angle: 36°



LI613101
Power: 55W
Cutout: Ø200mm
CCT: 3000K Beam Angle: 36°



LI613102
Power: 55W
Cutout: Ø200mm
CCT: 4000K Beam Angle: 36°



LI613103
Power: 55W
Cutout: Ø200mm
CCT: 5000K Beam Angle: 36°



LI613104
Power: 55W
Cutout: Ø200mm
CCT: 3000K Beam Angle: 36°



LI613105
Power: 55W
Cutout: Ø200mm
CCT: 4000K Beam Angle: 36°



LI613106
Power: 55W
Cutout: Ø200mm
CCT: 5000K Beam Angle: 36°



Accessories

Surface Mounted Kit



LI613124
D100mm*H95mm
Compatible for 9W Models
White



LI613125
D100mm*H95mm
Compatible for 9W Models
Black



LI613126
D121MM*H95MM
Compatible for 15W Models
White



LI613127
D121MM*H95MM
Compatible for 15W Models
Black



LI613128
D164MM*H110MM
Compatible for 20W Models
White



LI613129
D164MM*H110MM
Compatible for 20W Models
Black



LI613130
D220MM*H150MM
Compatible for 37W/55W Models
White



LI613131
D220MM*H150MM
Compatible for 37W/55W Models
Black

CloudWhite Series

IP44

Downlight

Beyond Light, To the Last Details..






CloudWhite CRI > 90



CRI 80


Wide Beam, Seamless Illumination

A 90° beam angle offers broader light coverage, minimizing shadows and creating an even, welcoming glow — ideal for general ambient lighting in modern interiors.



CCT Options

The ILLUS LED CCT Downlight is available in 3000K, 4000K, and 5700K, offering versatile color temperature options to create the ideal ambiance, from warm and cozy to bright and energizing.

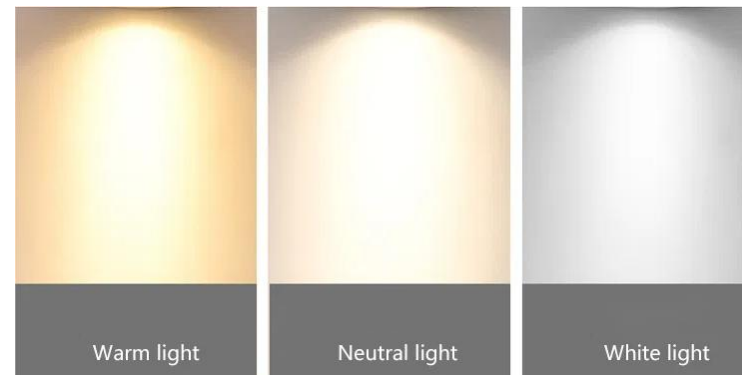

Specification

CRI ≥90

IP44

90°



LI613132
Power: 7W
Cutout: Ø70mm
CCT: 3000K



LI613133
Power: 7W
Cutout: Ø70mm
CCT: 4000K



LI613134
Power: 7W
Cutout: Ø70mm
CCT: 5700K



LI613135
Power: 10W
Cutout: Ø100mm
CCT: 3000K



LI613136
Power: 10W
Cutout: Ø100mm
CCT: 4000K



LI613137
Power: 10W
Cutout: Ø100mm
CCT: 5700K



LI613138
Power: 15W
Cutout: Ø140mm
CCT: 3000K



LI613139
Power: 15W
Cutout: Ø140mm
CCT: 4000K



LI613140
Power: 15W
Cutout: Ø140mm
CCT: 5700K



LI613141
Power: 23W
Cutout: Ø200mm
CCT: 3000K



LI613142
Power: 23W
Cutout: Ø200mm
CCT: 4000K



LI613143
Power: 23W
Cutout: Ø200mm
CCT: 5700K



LI613144
Power: 35W
Cutout: Ø200mm
CCT: 3000K



LI613145
Power: 35W
Cutout: Ø200mm
CCT: 4000K



LI613146
Power: 35W
Cutout: Ø200mm
CCT: 5700K

CloudLight Series

LED Module

Spotlight & Downlight

Beyond Light, To the Last Details..






CloudLight CRI 95



CRI 80


Beam Angle Options

Ideal for highlighting specific areas or objects with enhanced clarity and minimal light spill.

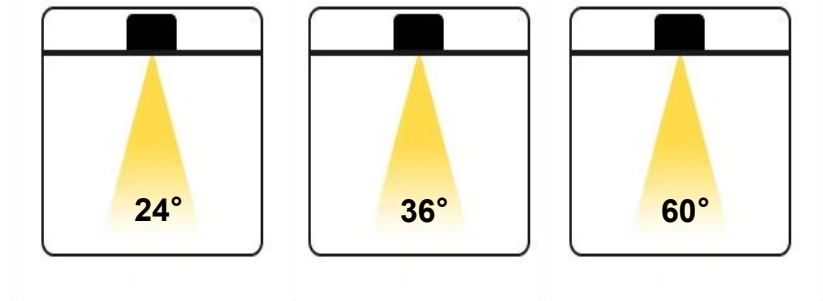

CCT Options

The CloudLight series is available in 3000K, 4000K, and 5000K, offering versatile color temperature options to create the ideal ambiance, from warm and cozy to bright and energizing.

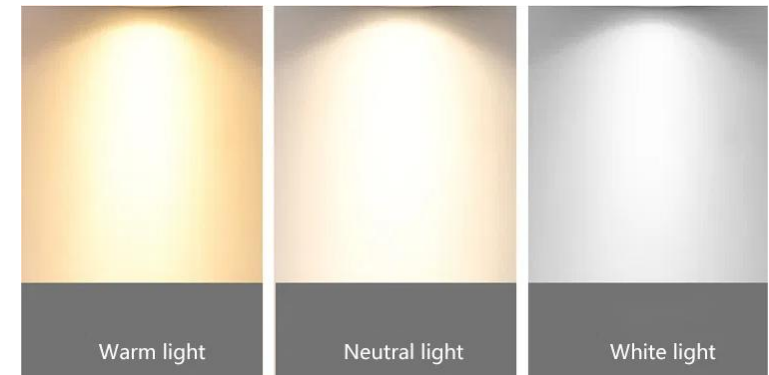



Specification



95



IP20



15° / 24° / 36° / 60°



LI5101163+LI5101776
Power: 19W
Cutout: Ø75mm
Adjustable
3000K/4000K/5000K



LI5101233+LI5101776
Power: 19W
Cutout: Ø75mm
Adjustable
3000K/4000K/5000K



LI5101225+LI5101776
Power: 19W
Cutout: Ø75mm
Fixed
3000K/4000K/5000K



LI5101226+LI5101776
Power: 19W
Cutout: Ø75mm
Fixed
3000K/4000K/5000K



LI5101376+LI5101776
Power: 19W
Cutout: Ø75mm
Fixed
3000K/4000K/5000K



LI5101675+5101783
Power: 11W
Cutout: Ø55mm
Fixed
3000K/4000K/5000K



Our Services



Showrooms(35+) opened in Spain, China, KSA, Dubai, Kuwait, Qatar and Oman



Illus owns the switches and sockets brand ilit and the smart products brand Hypnotek apart from illuminaries

What Can Comprehensive Multi-Brand Solutions Do for Your Business?



HYPNOTEK ilit



Choice for different price ranges to meet your budgets



We can also help to source what we don't produce with our QC requirement to ensure you one-stop solution


What Can We Do for **Distributors**?



How to Offer Support on **Projects**?



Illus Lighting

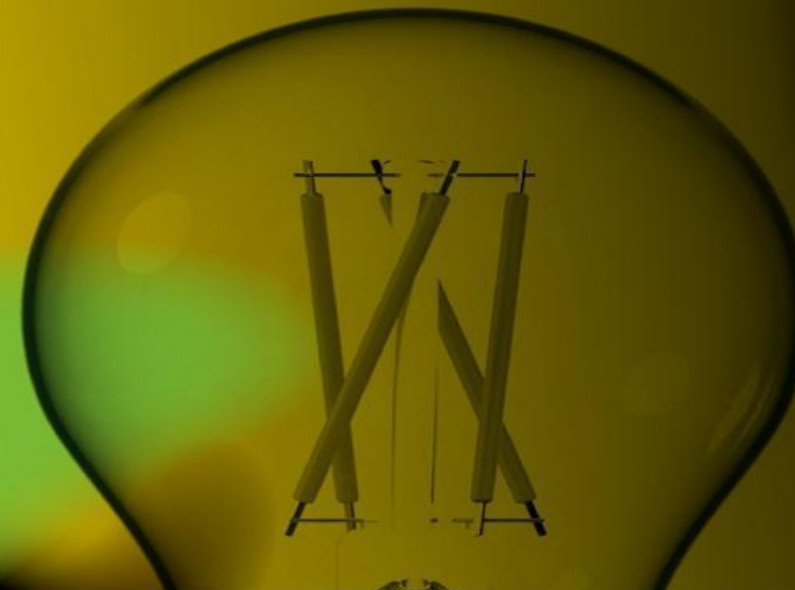

Contact us

 Website:
www.illuslighting.com

 Email:
global@illuslighting.com

 WhatsApp:
+86 18664429036



Search: Illus Lighting 

Where to Find us

- * Kingdom of Saudi Arabia-Head Office: 3533 Al Kharj rd, Al Aziziyah, riyaadh 14511
- * Illus Spain: 46970 Alaquàs, Valencia, Spain
- * Illus China: Star Alliance, No.68 Zhongxing Avenue, Guzhen, Zhongshan, Guangdong, China
- * Lighting Stores Kuwait: No 4, Opposite the city center entrance, 142 8 St, Shuwaikh industrial, Kuwait
- * Kingdom of Bahrain-Build Station: 7J3Q+R36, Arad, Bahrain
- * Build Station Qatar: Zone 43, Street 340, Salwa rd, doha, Qatar
- * Build Station Oman: 18 november Street 411 Muscat, Al Aziba, 130, Oman
- * Build Station UAE: 75 6th St - Al Quoz - dubai - United Arab Emirates