




LIFE IS ALWAYS FILLED
WITH COLOR, ISN'T IT?


Creating your high-end landscape lighting
with infinite linear light now

IP68 INFINITE APT LINEAR SERIES


Seamless jointing LED linear light with IK10 pressure and IP68 waterproof




APT2452




APT2841




APT2828




APT3055



APT3055B



APT3842



APT1021



IP68 LINEAR SERIES



LINEAR LIGHT APT2452

- ▶ Seamless joint without darkness, end-to-end for continuous light;
- ▶ High weight pressure resistant, upto 3000kg truck over;
- ▶ Consistent brightness without any decay;
- ▶ Fire Protection Grade:HB;
- ▶ IP68/IK10/CE/RoHs Certificated.

- 1800K

2200K

2400K

2700K

3000K

3500K

4000K

4500K

5000K

5700K

6000K

6500K

Red

Orange

Yellow

Green

Cyan

Blue

Purple

Pink

Tiffany Blue



Marrs Green



Basic Parameters

Product:	APT2452
Material:	PMMA (10mm thick)
Size:	24*52mm (0.95”*2.05”)
IK Rating:	Ik10 (must be installed as instructions)
Light emission:	120°
IP Rate:	IP68 with appropriately rated accessories
Max length:	6.56ft (2m)
Product typology:	Inground / Wall mounted/Ceiling Mounted
Cable out:	Out from two side bottom
UGR:	>19
Max running length:	5meter (one side feed)

Dimension

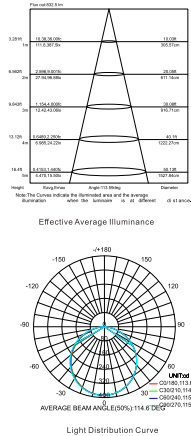


Optical parameter


Model	Voltage	Power	CRI (Ra)	Light Emission	Color	Lumens(LM/M)	Efficacy (LM/w)	Max length (mm)
APT2452-Wxx	CV24V	14.4W	>80	120°	2700K	1080	75	2000
					3000K	1123	78	
					4000K	1238	86	
					6000K	1224	85	

Dimension structure


Top view

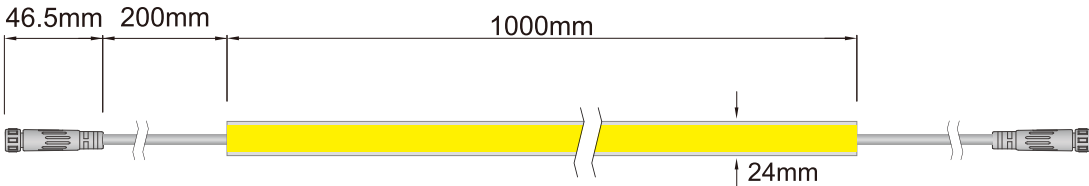


Side view

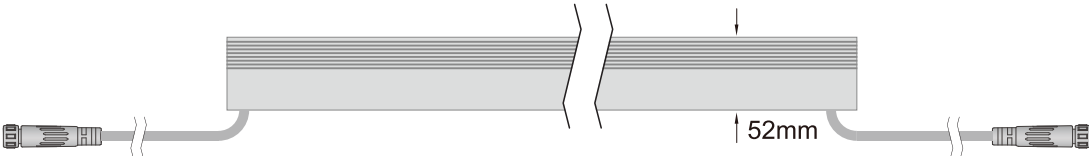


Bottom view



Cable Entry

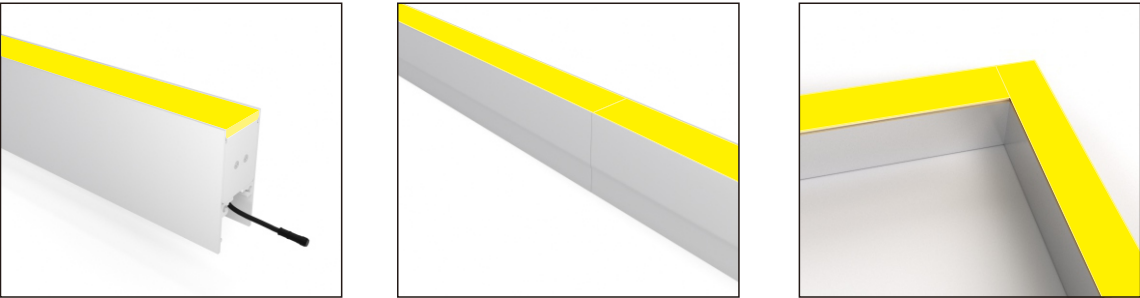

Installation

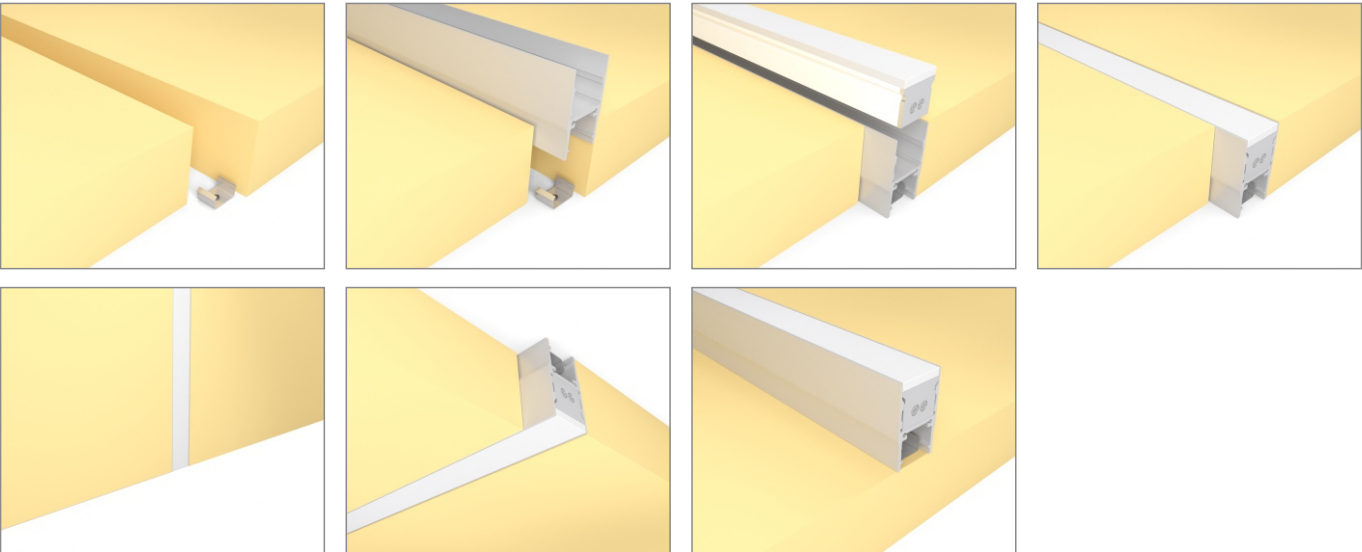

Wall Installation

Ceiling Installation

Surface Installation

IP68 LINEAR SERIES



LINEAR LIGHT APT2841

- ▶ Seamless joint without darkness, end-to-end for continuous light;
- ▶ High weight pressure resistant, upto 3000kg truck over;
- ▶ Consistent brightness without any decay;
- ▶ Fire Protection Grade:HB;
- ▶ IP68/IK10/CE/RoHs Certificated.



- RGB ●RGBW
- 1800K ●2200K ●2400K ●2700K ●3000K ●3500K
- 4000K ●4500K ●5000K ●5700K ●6000K ●6500K
- Red ●Orange ●Yellow ●Green ●Cyan ●Blue
- Purple ●Pink ●Tiffany Blue ●Marrs Green



Basic Parameters

Product:	APT2841
Material:	PMMA (10mm thick)
Size:	28*41mm (1.1"*1.6")
IK Rating:	Ik10 (must be installed as instructions)
Light emission:	120°
IP Rate:	IP68 with appropriately rated accessories
Max length:	6.56ft (2m)
Product typology:	Inground / Wall mounted/Ceiling Mounted
Cable out:	Out from two side bottom
UGR:	>19
Max running length:	5meter (one side feed)


Dimension

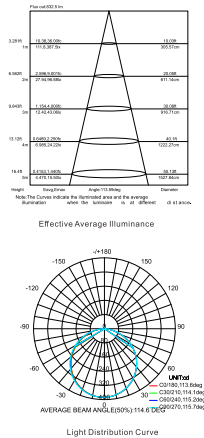

Optical parameter

Model	Voltage	Power	CRI (Ra)	Light Emission	Color	Lumens(LM/M)	Efficacy (LM/w)	Max length (mm)
APT2841-Wxx	CV24V	14.4W	>80	120°	2700K	1028	71.4	2006
					3000K	1142	79.28	
					4000K	1256	87.2	
					6000K	1224	85	
APT2841-RGB		4.8W	/	120°	Red	72	15	2006
		4.8W			Green	163	33.9	
		4.8W			Blue	39	8.14	
		14.4W			RGB	262	18.17	
APT2841-RGBW		3.6W	/	120°	Red	54	15	2006
		3.6W			Green	122	33.9	
		3.6W			Blue	29.3	8.14	
		3.6W			4000K	314	87.2	
		14.4W			RGBW	284	79	


Dimension structure

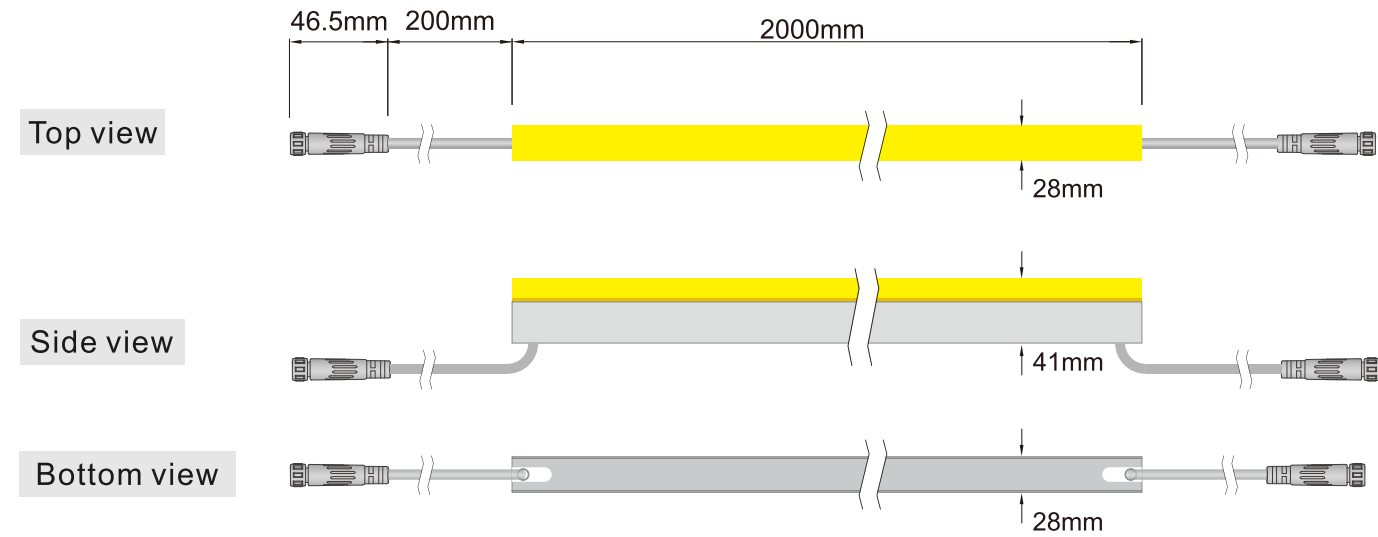

Cable Entry



Installation

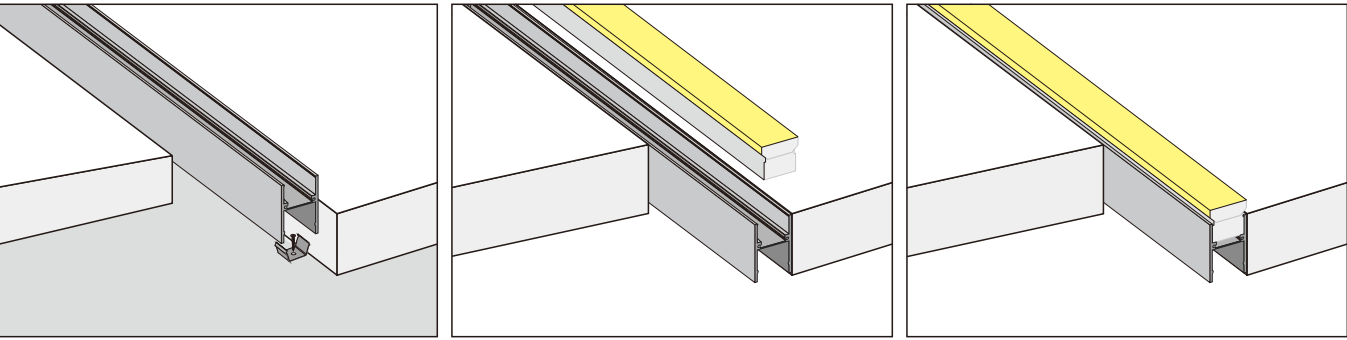

IP68 LINEAR SERIES



LINEAR LIGHT APT 2828

- ▶ Seamless joint without darkness, end-to-end for continuous light;
- ▶ High weight pressure resistant, upto 3000kg truck over;
- ▶ Consistent brightness without any decay;
- ▶ Fire Protection Grade:HB;
- ▶ IP68/IK10/CE/RoHs Certificated.



- RGB ●RGBW
- 1800K ●2200K ●2400K ●2700K ●3000K ●3500K
- 4000K ●4500K ●5000K ●5700K ●6000K ●6500K
- Red ●Green ●Blue



Basic Parameters

Product:	APT2828
Material:	PMMA (10mm thick)
Size:	28*54.7mm (1.10"*2.15")
IK Rating:	Ik10 (must be installed as instructions)
Light emission:	120°
IP Rate:	Ip68 with appropriately rated accessories
Max length:	6.56ft (2m)
Product typology:	Inground / Wall mounted/Ceiling Mounted
Cable out:	Out from two side bottom
UGR:	<19
Max running length:	10meter (two side feed)

Dimension

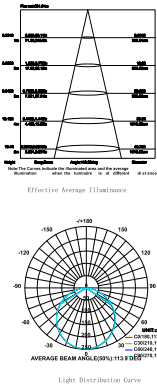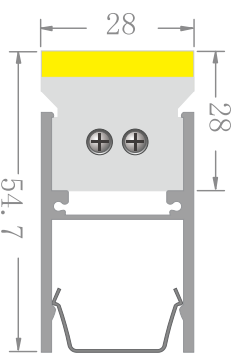


Optical parameter


Model	Voltage	Power	CRI (Ra)	Light Emission	Color	Lumens(LM/M)	Efficacy (LM/w)	Max length (mm)
APT2828-Wxx	CV24V	14.4W	>80	120°	2700K	1028	71.4	2006
					3000K	1142	79.28	
					4000K	1256	87.2	
					6000K	1224	85	
APT2828-RGB		4.8W	/	120°	Red	72	15	2006
		4.8W			Green	163	33.9	
		4.8W			Blue	39	8.14	
		14.4W			RGB	262	18.17	
APT2828-RGBW		3.6W	/	120°	Red	54	15	2006
		3.6W			Green	122	33.9	
		3.6W			Blue	29.3	8.14	
		3.6W			4000K	314	87.2	
		14.4W			RGBW	284	79	

Dimension structure


Top view

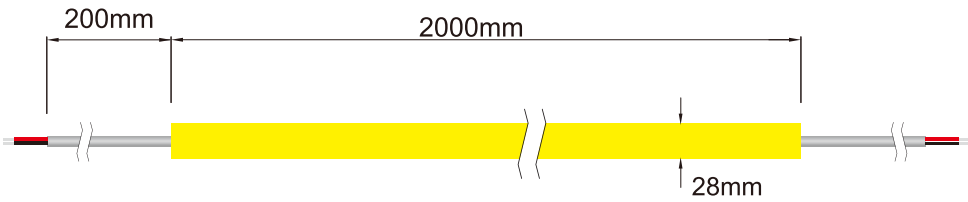




Side view

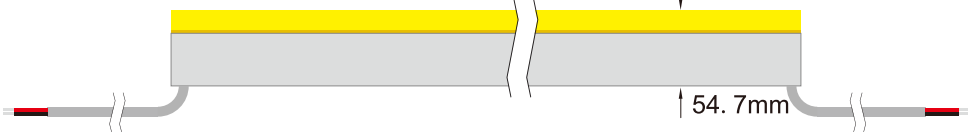




Bottom view




Cable Entry




Installation

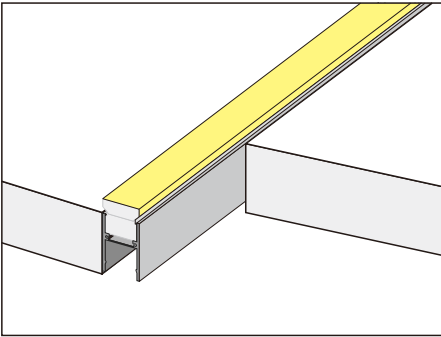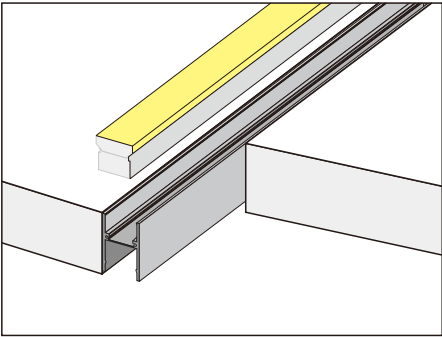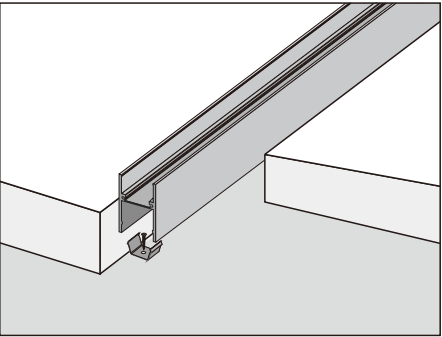

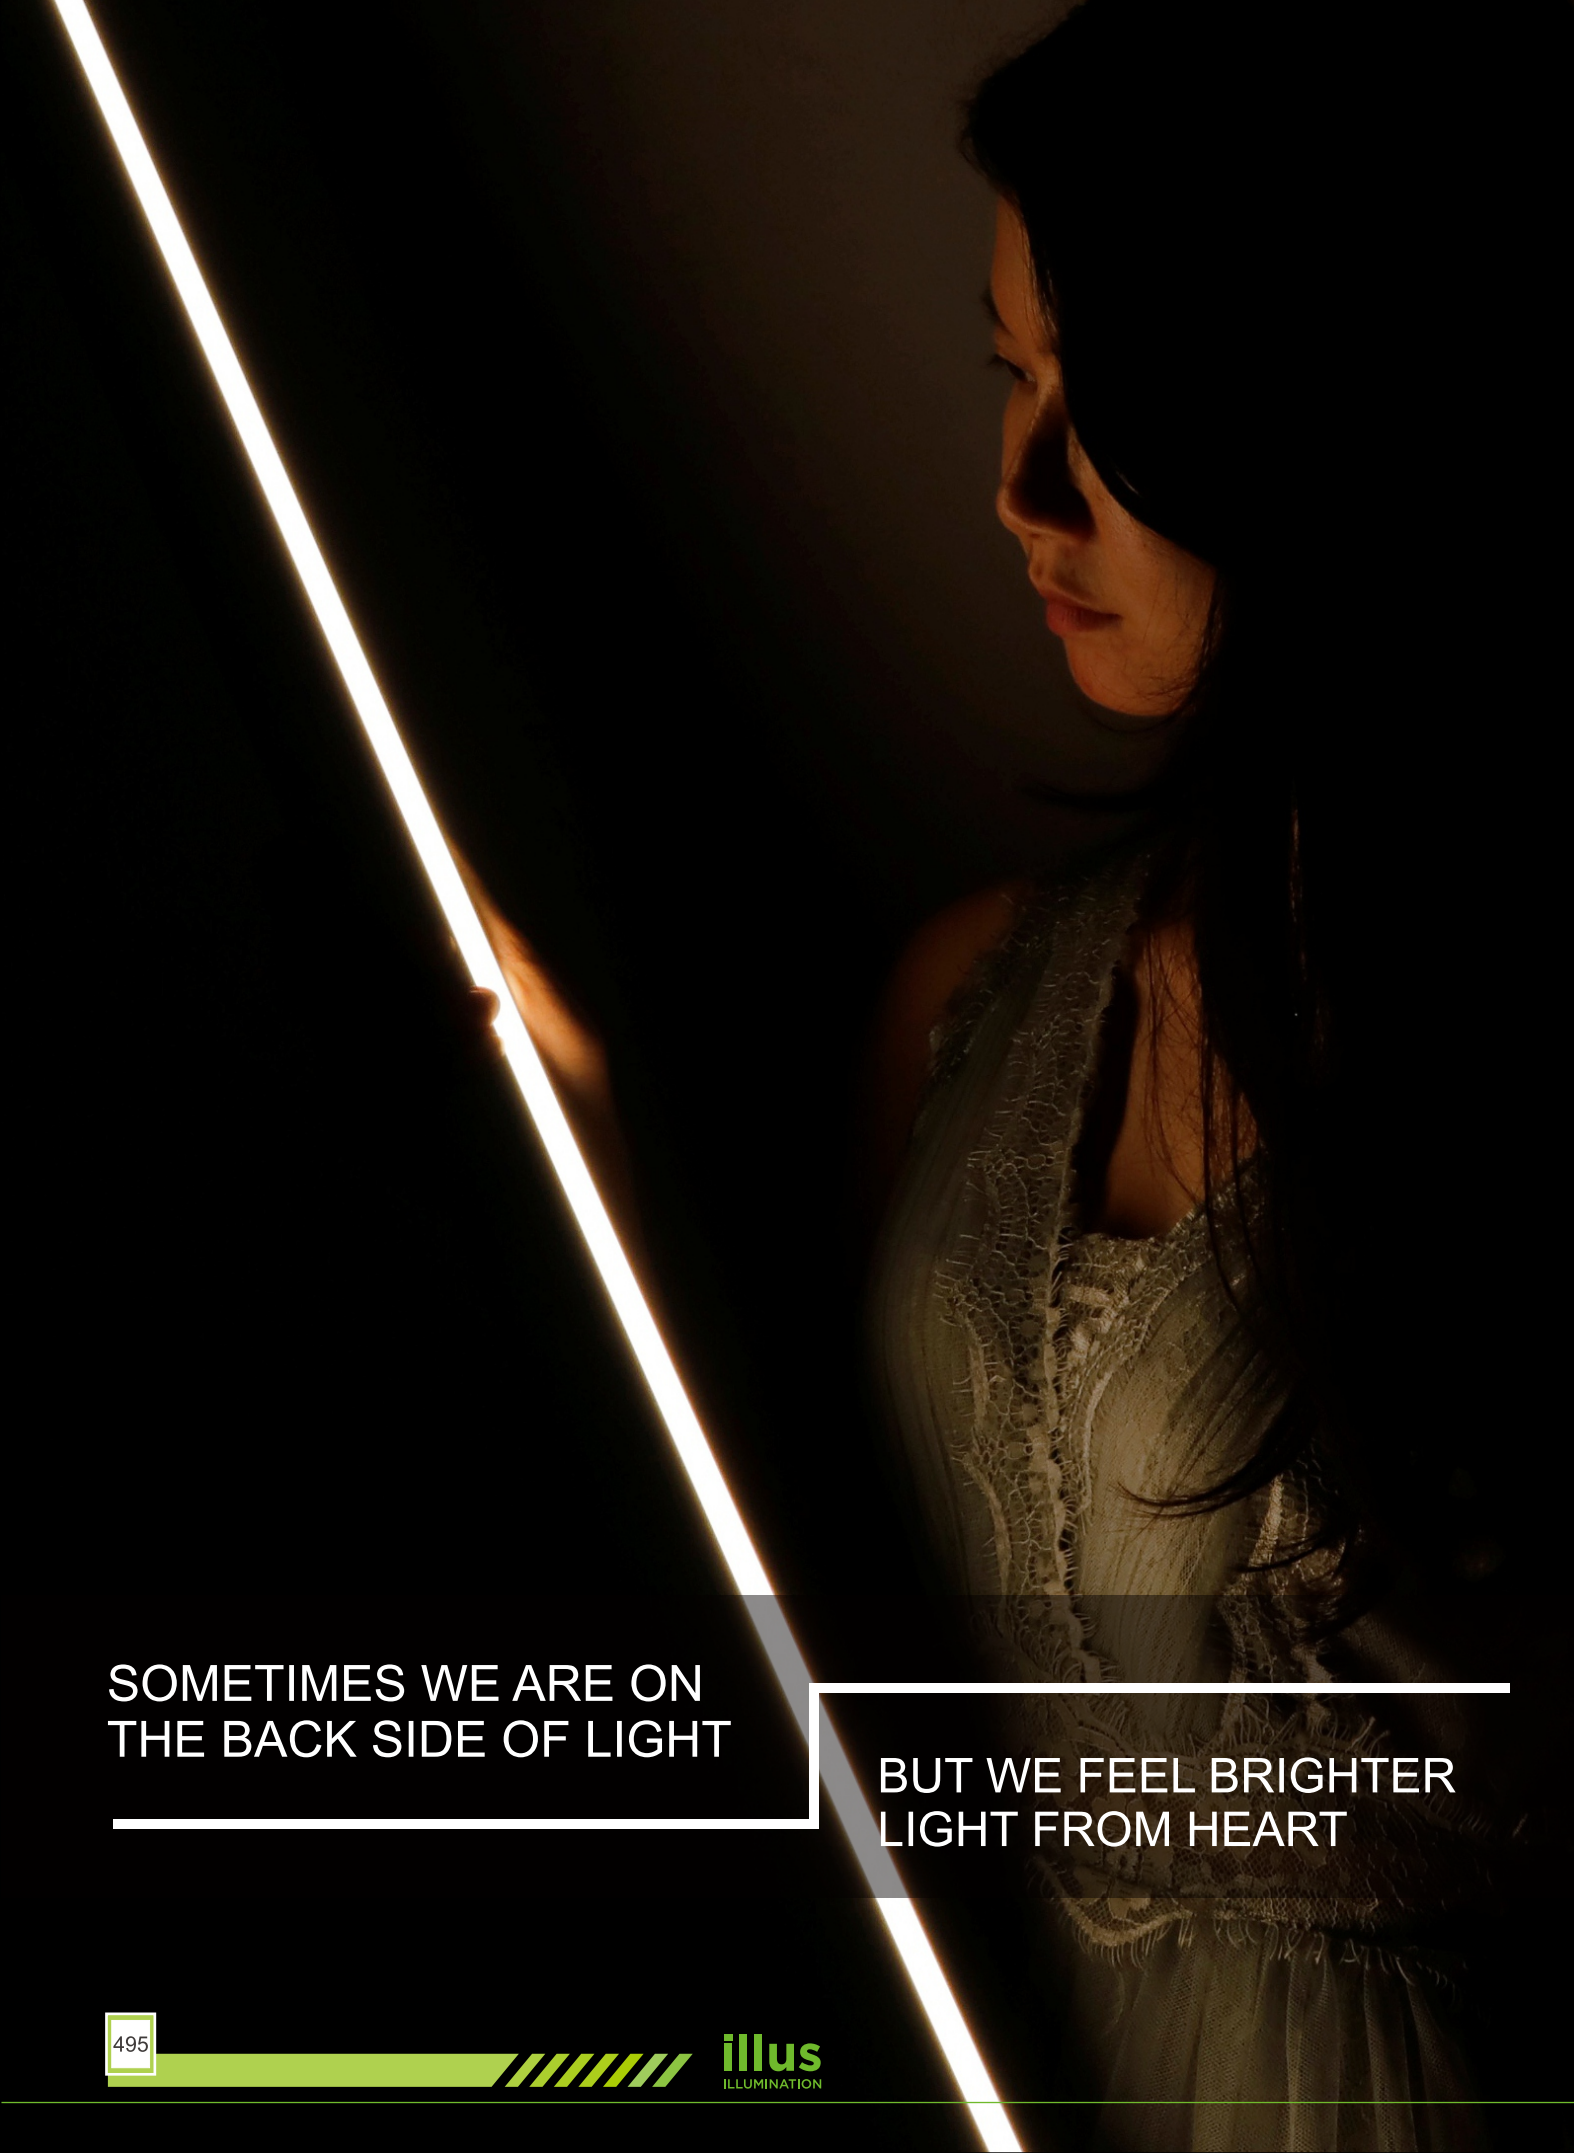

SOMETIMES WE ARE ON
THE BACK SIDE OF LIGHT

BUT WE FEEL BRIGHTER
LIGHT FROM HEART

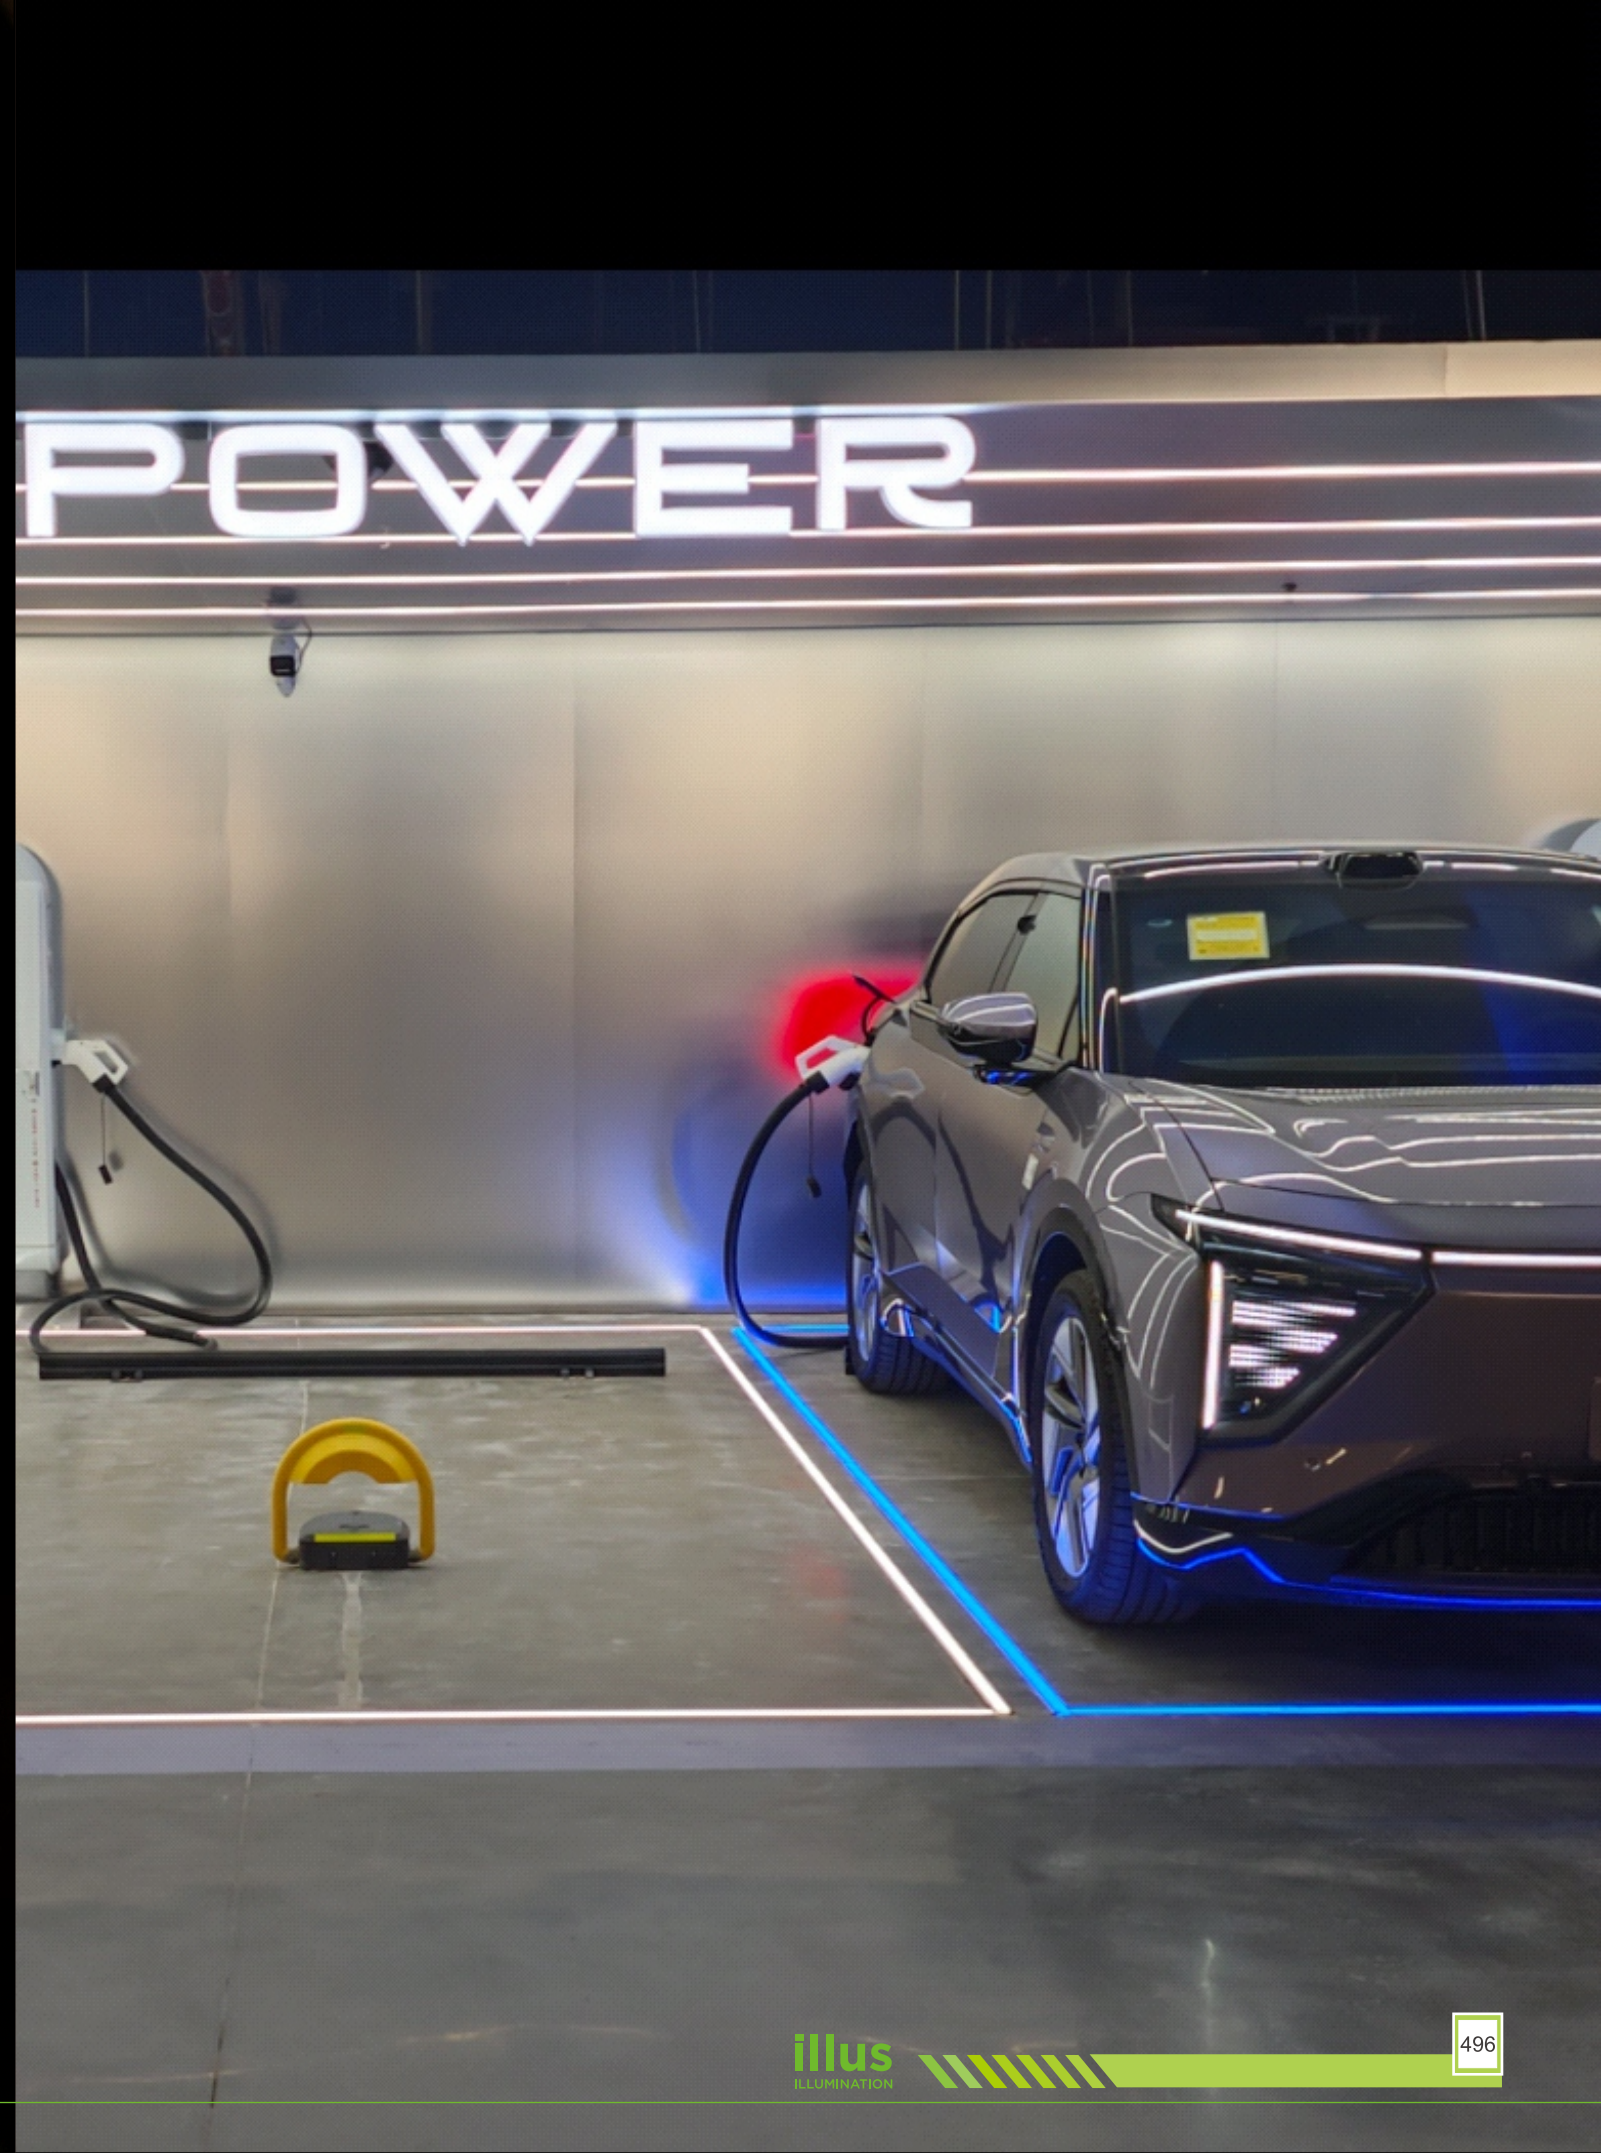

IP68 LINEAR SERIES



LINEAR LIGHT APT3055

- ▶ Seamless joint without darkness, end-to-end for continuous light;
- ▶ High weight pressure resistant, upto 3000kg truck over;
- ▶ Consistent brightness without any decay;
- ▶ Fire Protection Grade:HB;
- ▶ IP68/IK10/CE/RoHs Certificated.

- 2700K+6500K

RGB
- 1800K

2200K

2400K

2700K

3000K

3500K
- 4000K

4500K

5000K

5700K

6000K

6500K
- Red

Orange

Yellow

Green

Cyan

Blue
- Purple

Pink

Tiffany Blue



Marrs Green



Basic Parameters

Product:	APT3055
Material:	PMMA (10mm thick)
Size:	30.5*54.8mm (1.2"*2.16")
IK Rating:	Ik10 (must be installed as instructions)
Light emission:	120°
IP Rate:	IP68 with appropriately rated accessories
Max length:	6.56ft (2m)
Product typology:	Inground
Cable out:	Out from two side bottom
UGR:	>19
Max running length:	5meter (one side feed)


Dimension

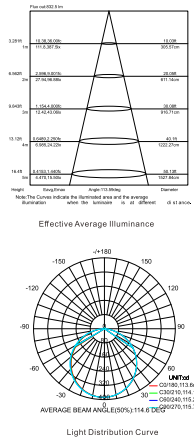


Optical parameter

Model	Voltage	Power	CRI (Ra)	Light Emission	Color	Lumens(LM/M)	Efficacy (LM/w)	Max length (mm)
APT3055-Wxx	CV24V	14.4W	>80	120°	2700K	1028	71.4	2000
					3000K	1142	79.28	
					4000K	1256	87.2	
					6000K	1224	85	
APT3055-CCT	CV24V	14.4W	>80	120°	2700K	514.1	71.4	2000
					6000K	612	85	
					2700K+6000K	1123	78	
APT3055-RGB	CV24V	14.4W	/	120°	Red	75.8	15.8	2000
					Green	172.3	35.9	
					Blue	39.4	8.2	
					RGB	263.5	18.3	


Dimension structure

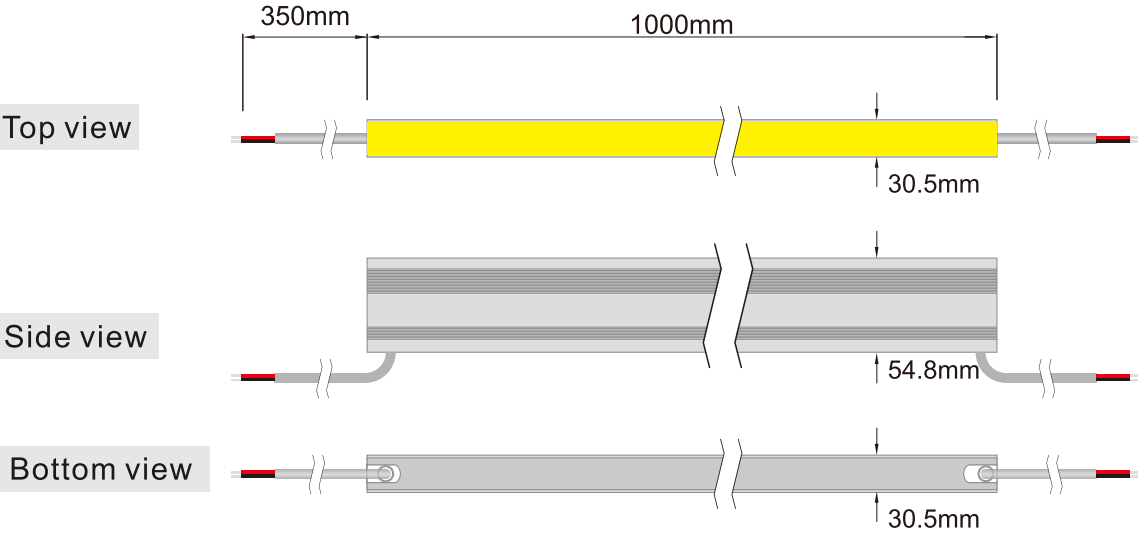

Cable Entry

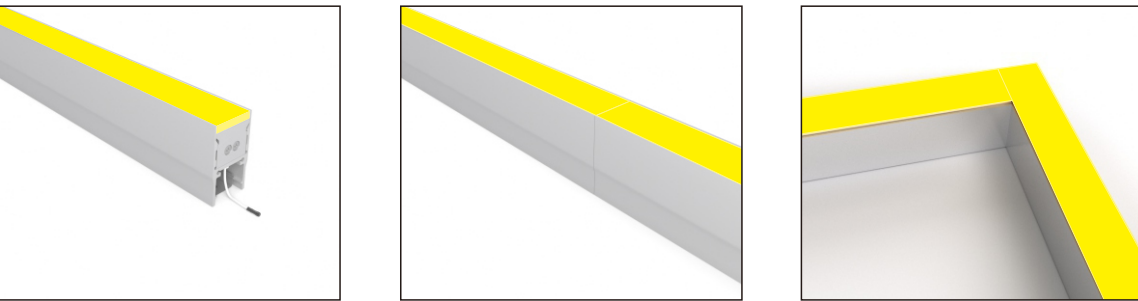

Installation

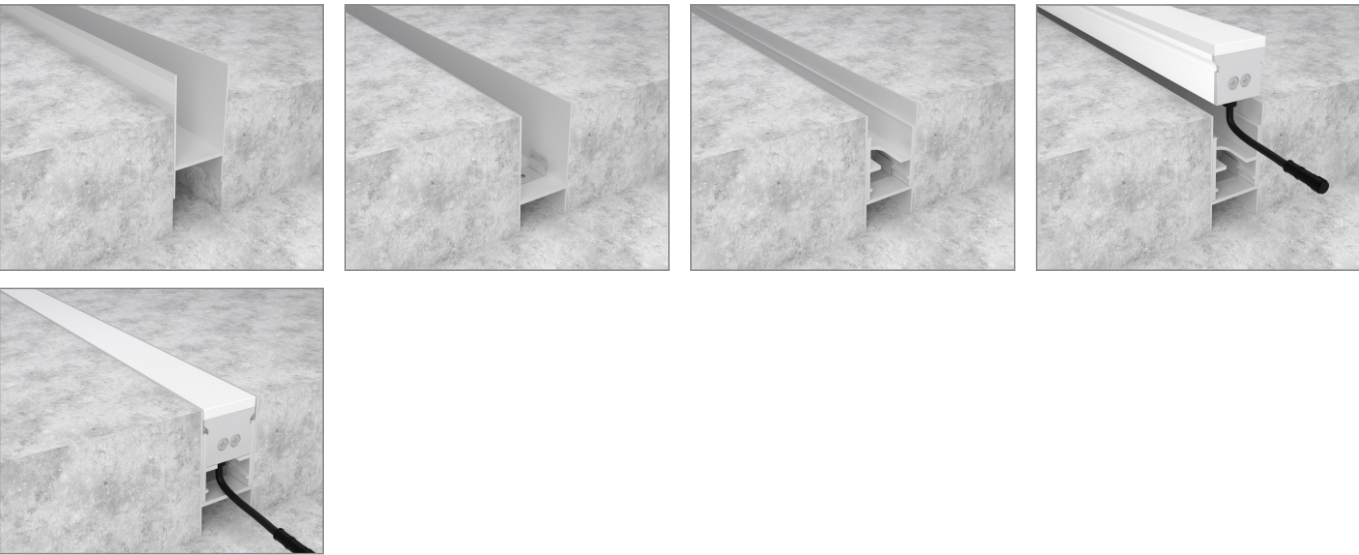

IP68 LINEAR SERIES



LINEAR LIGHT APT3055B

- ▶ Seamless joint without darkness, end-to-end for continuous light;
- ▶ High weight pressure resistant, upto 3000kg truck over;
- ▶ Consistent brightness without any decay;
- ▶ Fire Protection Grade:HB;
- ▶ IP68/IK10/CE/RoHs Certificated.

- 2700K+6500K

RGB
- 1800K

2200K

2400K

2700K

3000K

3500K
- 4000K

4500K

5000K

5700K

6000K

6500K
- Red

Orange

Yellow

Green

Cyan

Blue
- Purple

Pink

Tiffany Blue


Marrs Green



Basic Parameters

Product:	APT3055B
Material:	PMMA (10mm thick)
Size:	30.5*54.8mm (1.2"*2.16")
IK Rating:	Ik10 (must be installed as instructions)
Light emission:	120°
IP Rate:	IP68 with appropriately rated accessories
Max length:	6.56ft (2m)
Product typology:	Inground / Wall mounted/Ceiling Mounted
Cable out:	Out from two side bottom
UGR:	>19
Max running length:	5meter (one side feed)

Dimension

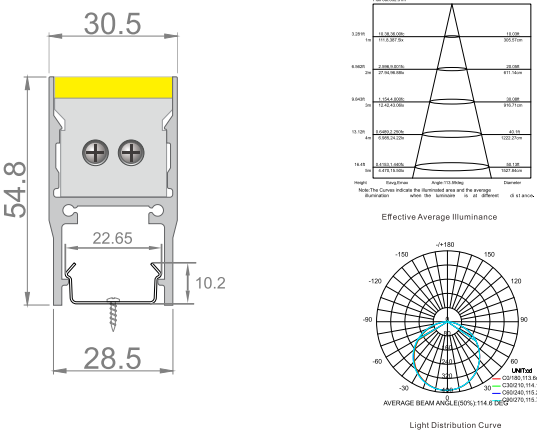


Optical parameter


Model	Voltage	Power	CRI (Ra)	Light Emission	Color	Lumens(LM/M)	Efficacy (LM/w)	Max length (mm)
APT3055B-Wxx	CV24V	14.4W	>80	120°	2700K	1028	71.4	2000
					3000K	1142	79.28	
					4000K	1256	87.2	
					6000K	1224	85	
APT3055B-CCT	CV24V	14.4W	>80	120°	2700K	514.1	71.4	2000
					6000K	612	85	
					2700K+6000K	1123	78	
APT3055B-RGB	CV24V	14.4W	/	120°	Red	75.8	15.8	2000
					Green	172.3	35.9	
					Blue	39.4	8.2	
					RGB	263.5	18.3	

Dimension structure


Top view

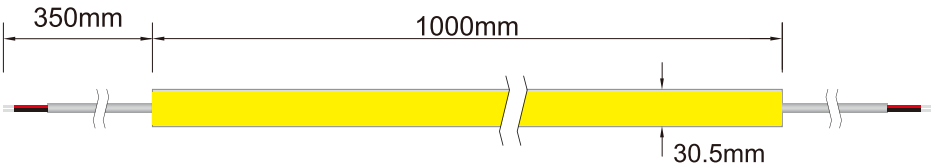


Side view

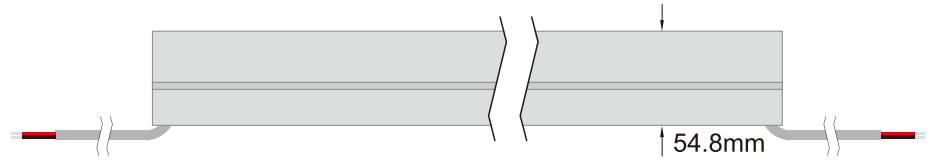


Bottom view



Cable Entry

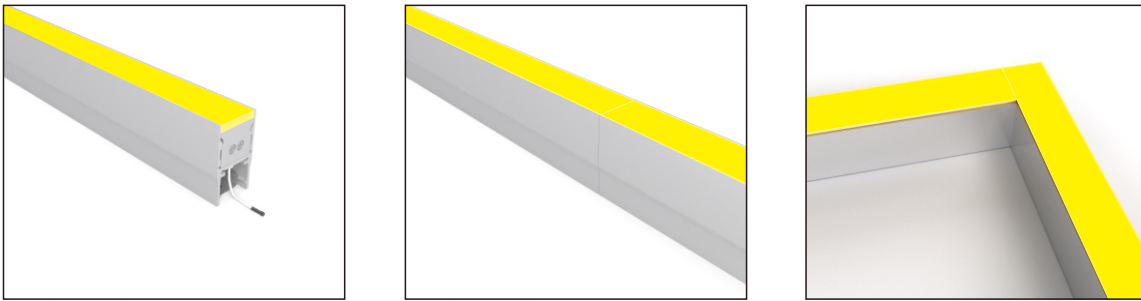

Installation

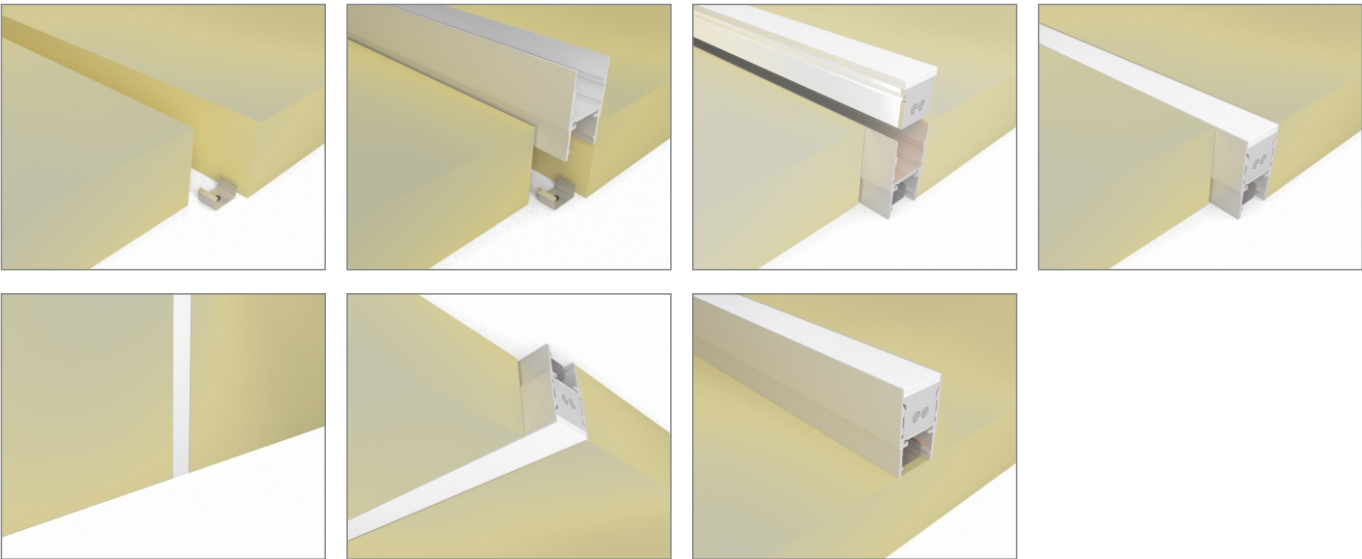

Wall Installation

Ceiling Installation

Surface Installation

IP68 LINEAR SERIES



LINEAR LIGHT APT3842

- ▶ Seamless joint without darkness, end-to-end for continuous light;
- ▶ High weight pressure resistant, upto 3000kg truck over;
- ▶ Consistent brightness without any decay;
- ▶ Fire Protection Grade:HB;
- ▶ IP68/IK10/CE/RoHs Certificated.

- 1800K

2200K

2400K

2700K

3000K

3500K
- 4000K

4500K

5000K

5700K

6000K

6500K
- Red

Orange

Yellow

Green

Cyan

Blue
- Purple

Pink

Tiffany Blue



Marrs Green



Basic Parameters

Product:	APT3842
Material:	PMMA (10mm thick)
Size:	38*42mm (1.5″*1.65″)
IK Rating:	Ik10 (must be installed as instructions)
Light emission:	120°
IP Rate:	IP68 with appropriately rated accessories
Max length:	6.56ft (2m)
Product typology:	Inground / Wall mounted/Ceiling Mounted
Cable out:	Out from two side bottom
UGR:	>19
Max running length:	5meter (one side feed)


Dimension

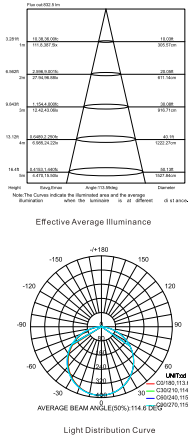


Basic Parameters

Model	Voltage	Power	CRI (Ra)	Light Emission	Color	Lumens(LM/M)	Efficacy (LM/w)	Max length (mm)
APT3842-Wxx	CV24V	14.4W	>80	120°	2700K	1028	71.4	2000
					3000K	1054	73.2	
					4000K	1171	81.3	
					6000K	1181	82	


Dimension structure

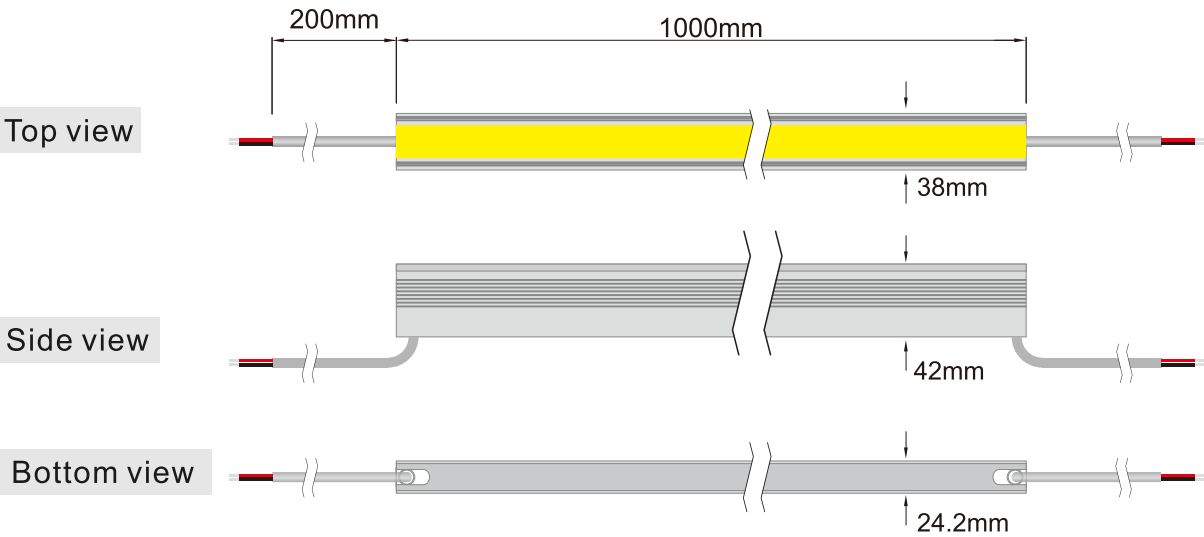

Cable Entry

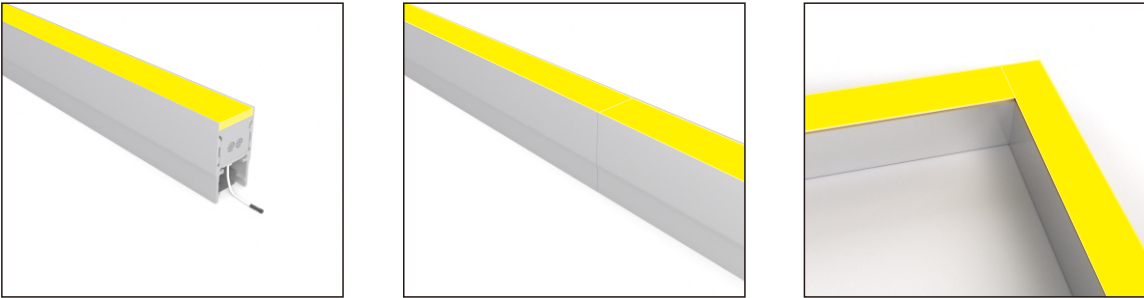

Installation

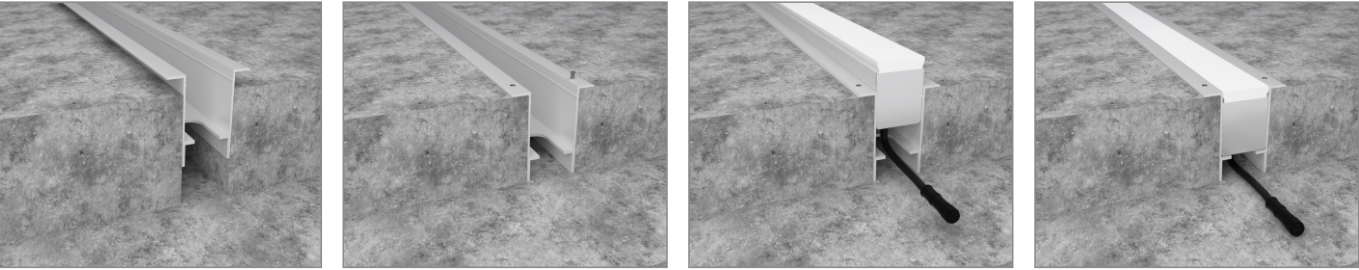

IP68 LINEAR SERIES



LINEAR LIGHT APT1021

- ▶ Seamless joint without darkness, end-to-end for continuous light;
- ▶ High weight pressure resistant, upto 3000kg truck over;
- ▶ Consistent brightness without any decay;
- ▶ Fire Protection Grade:HB;
- ▶ IP68/IK10/CE/RoHs Certificated.

- 1800K

2200K

2400K

2700K

3000K

3500K

4000K

4500K

5000K

5700K

6000K

6500K

Red

Orange

Yellow

Green

Cyan

Blue

Purple

Pink

Tiffany Blue



Marrs Green



Basic Parameters

Product:	APT1021
Material:	PMMA (10mm thick)
Size:	39*50mm (1.54"*1.97")
IK Rating:	Ik10 (must be installed as instructions)
Light emission:	120°
IP Rate:	IP68 with appropriately rated accessories
Max length:	6.56ft (2m)
Product typology:	Inground / Wall mounted/Ceiling Mounted
Cable out:	Out from two side bottom
UGR:	>19
Max running length:	5meter (one side feed)

Dimension

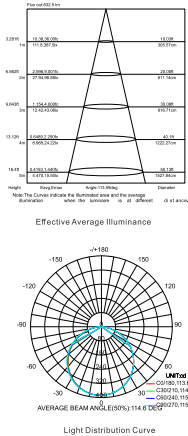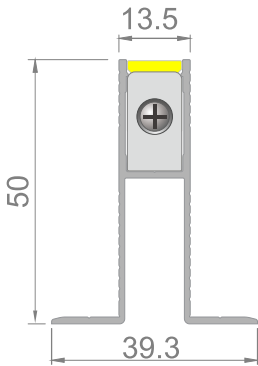


Basic Parameters


Model	Voltage	Power	CRI (Ra)	Light Emission	Color	Lumens(LM/M)	Efficacy (LM/w)	Max length (mm)
APT1021-Wxx	CV24V	10W	>80	120°	2700K	630	63	2000
					3000K	650	65	
					4000K	720	72	
					6000K	710	71	

Dimension structure


Top view

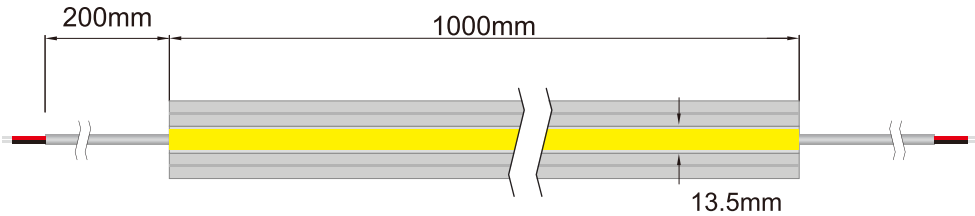




Side view

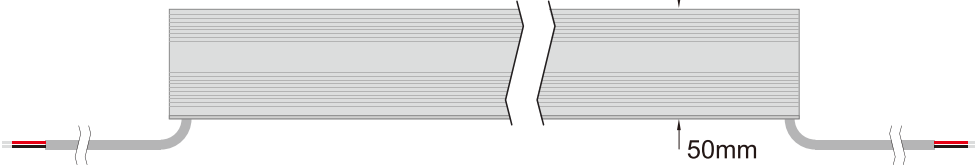

Bottom view

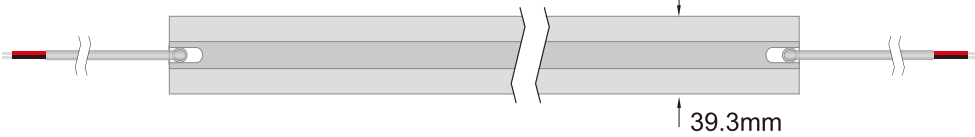

Cable Entry



Installation

