illus
ILLUMINATION

BEYOND LIGHT..
TO THE LAST DETAILS!

HYPNOTEK

Smart Home Catalogue 2026


We strive to be
the leader in the industry
and the world's most
respected lighting solution
provider.

ILLUS Lighting

ILLUS dedicates itself to provide human oriented architectural lighting solution and products for indoor and outdoor applications. A truly innovative company, ILLUS has always been at the forefront of professional office lighting since inception. Since then ILLUS continues developing innovative, custom lighting solutions that meet extremely exacting requirements in terms of ergonomics, economic efficiency and environmental compatibility and also deliver aesthetic added value to our customers. Our customers will always find that our solutions reflect the requirements satisfying a broad range of customer needs for every lighting application ILLUS is a brand that helps revealing the beauty around you where it constitutes of products and solutions designed with care and attention to detail giving professional quality products.
Our goal has always been to offer our customers a first-class product backed by unparalleled service, focused on solving our client's illumination challenges.

Our Vision

In ILLUS every detail created with enthusiasm constantly evolving technology to simplify the life of people. We consistently innovate and devote to decrease power consumption to ease the burden of earth. Light is essential for people's life quality and well-being, we care for every situation people need artificial light whenever light serves. ILLUS lighting is beyond light, to the last details.

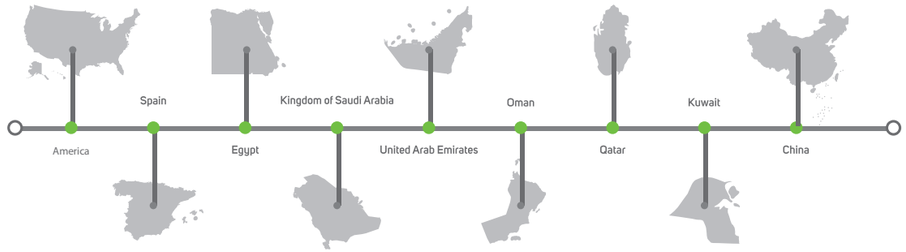

Where to find us

Kingdom of Saudi Arabia-Head Office

3533 Al Kharj Rd, Al Aziziyah, Riyadh 14511
https://maps.app.goo.gl/TRgDmL4efaDRzWWL8

China – illus

Star Alliance, No.68 Zhongxing Avenue, Guzhen, Zhongshan,Guangdong, China
https://maps.app.goo.gl/cJJefWvYRyfzAQjq8

Spain – illus

46970 Alaquàs, Valencia, Spain
https://goo.gl/maps/C5DejH52sP17L2Nv9

UAE – Build Station

75 6th St - Al Quoz - Dubai - United Arab Emirates
https://goo.gl/maps/LCTSSYSqEB2mcAbA8

Kingdom of Bahrain

7J3Q+R36, Arad, Bahrain
https://maps.app.goo.gl/e2wceYwDusneptxs7

Qatar – Build Station

Zone 43, Street 340, Salwa Rd, Doha, Qatar
https://maps.app.goo.gl/hQY8PbFDPbXKYiqJ6

Oman – Build Station


18 November Street 411 Muscat, Al Aziba, 130, Oman
https://goo.gl/maps/6tJLBVdhiVPvUE1w7

Kuwait –Lighting Stores

No 4, Opposite the city center entrance, 142 8 St, Shuwaikh Industrial, Kuwait
Lighting Stores - Google Maps

Egypt -illus

13 El Obour Blgds. Salah Salem – Masr El-Gedida - Cairo
30° 04'40.0"N 31° 18'36.7"E - Google Maps

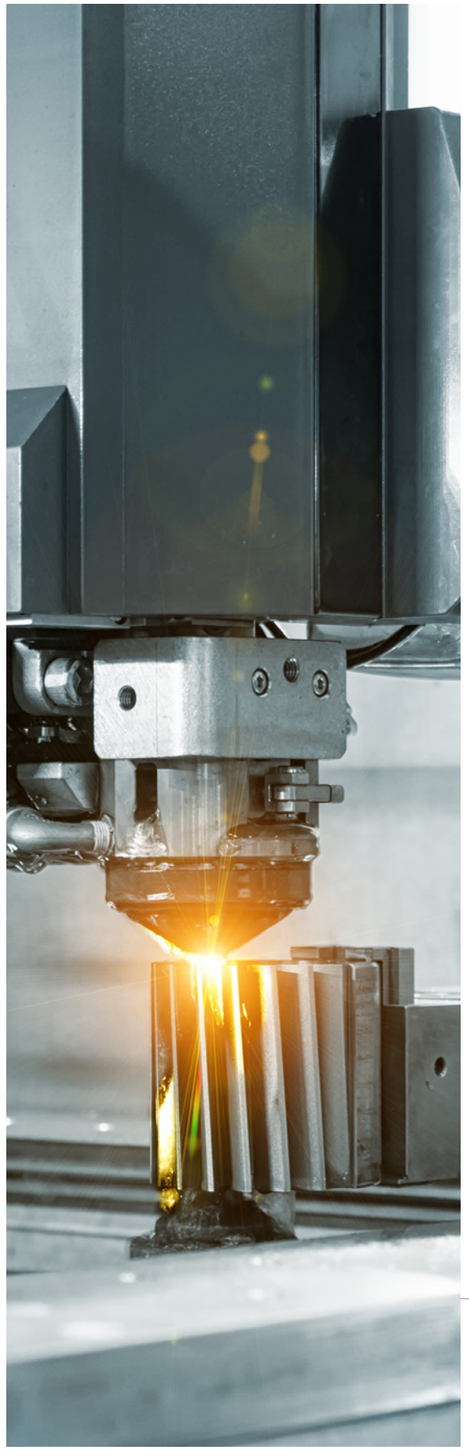

R&D and Manufacturing


Manufacturing

ILLUS has two directly-operated production bases in Yangzhou covering an area of 25,000 square meters and 300 staffs. The production bases contain over 30 hi-speed automatic encapsulation lines, 15 automatic SMD and applied welding lines, 5 automatic extrusion lines and 6 automatic luminaire production lines, characterizing a complete production process for LED strip inclusive of LED encapsulation, hi-speed SMT, automatic welding and full series of water resistance with average monthly production capacity of LED strips reaching up to 1.5 million meters. Besides, ILLUS modernized manufacturing factory to achieve a complete production process for linear luminaire inclusive of precision machining, automatic assembly, color spraying and free customization with average monthly production capacity reaching up to 120,000 strips in order to assure customers of high-quality, super cost-effective products and rapid delivery.



R&D

ILLUS has established a R&D expert team composed of over 50 core technicians, a majority of which graduated from top-rated universities and are proficient in such fields as optics, technique, material science, electrics, thermal physics, intelligent control and industrial design with more than 10years R&D experience and technical know-how in linear lighting.

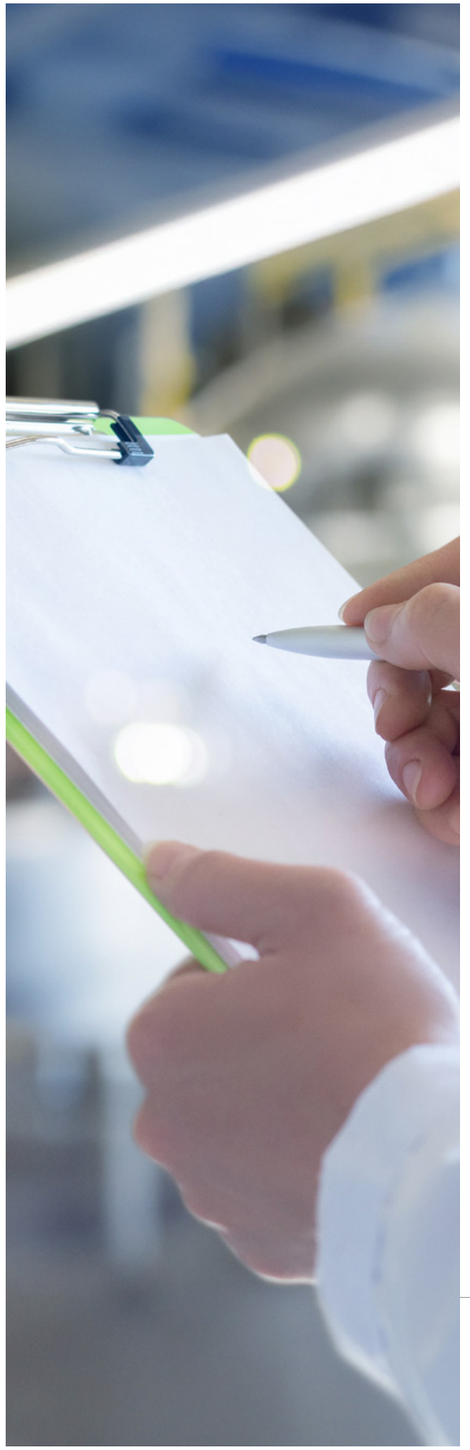

Laboratory & Inspection

Laboratory of ILLUS, covering an area of 460 square meters, was outfitted with 48 sets of equipment which was distributed as per safety zone, EMC zone, photoelectric zone, IP water resistance zone, aging zone and product reliability zone. Inspection covers products inclusive of LED strip, neon strip, linear luminaire, power supply and related accessories, with inspection standard ranging from safety, EMC, performance to product reliability. Testing reports can be tracked all the way from product design evaluation period to type approval period to guarantee quality of products.



Patent

ILLUS strives to R&D in product and technology. So far, it has gained 3 invention patents and nearly 100 utility model patents and appearance patents.

Contents

Hypnotek

- Smart Lighting Solution
- Scent Diffuser
- Smart Air Purifier
- Smart Exhaust Fan
- Cabinet Light Solution
- Kinetic Switches & Controllers
- Smart Door Lock



10:00 AM
TEMPERATURE
WEATHER
AIR CONDITION
HOME
25
SMART HOME
75%
TEMPERATURE
WEATHER
AIR CONDITION
HOME
MEDIA
SMART HOME
CCTV
LIGHT
TEMP
SECURITY
NETWORK
WATER
LOCK
FAN
TV

Smart Lighting Solution

Hypnotek Smart Lighting Solution empowers you to create the perfect atmosphere for any moment, effortlessly.

With advanced touch-screen panels and full-house lighting control, you can manage every light in your home or office with ease. From mood lighting to energy-saving automation, our solution offers personalized control at your fingertips.


- Villa
- Hotel
- Office
- Commercial Space

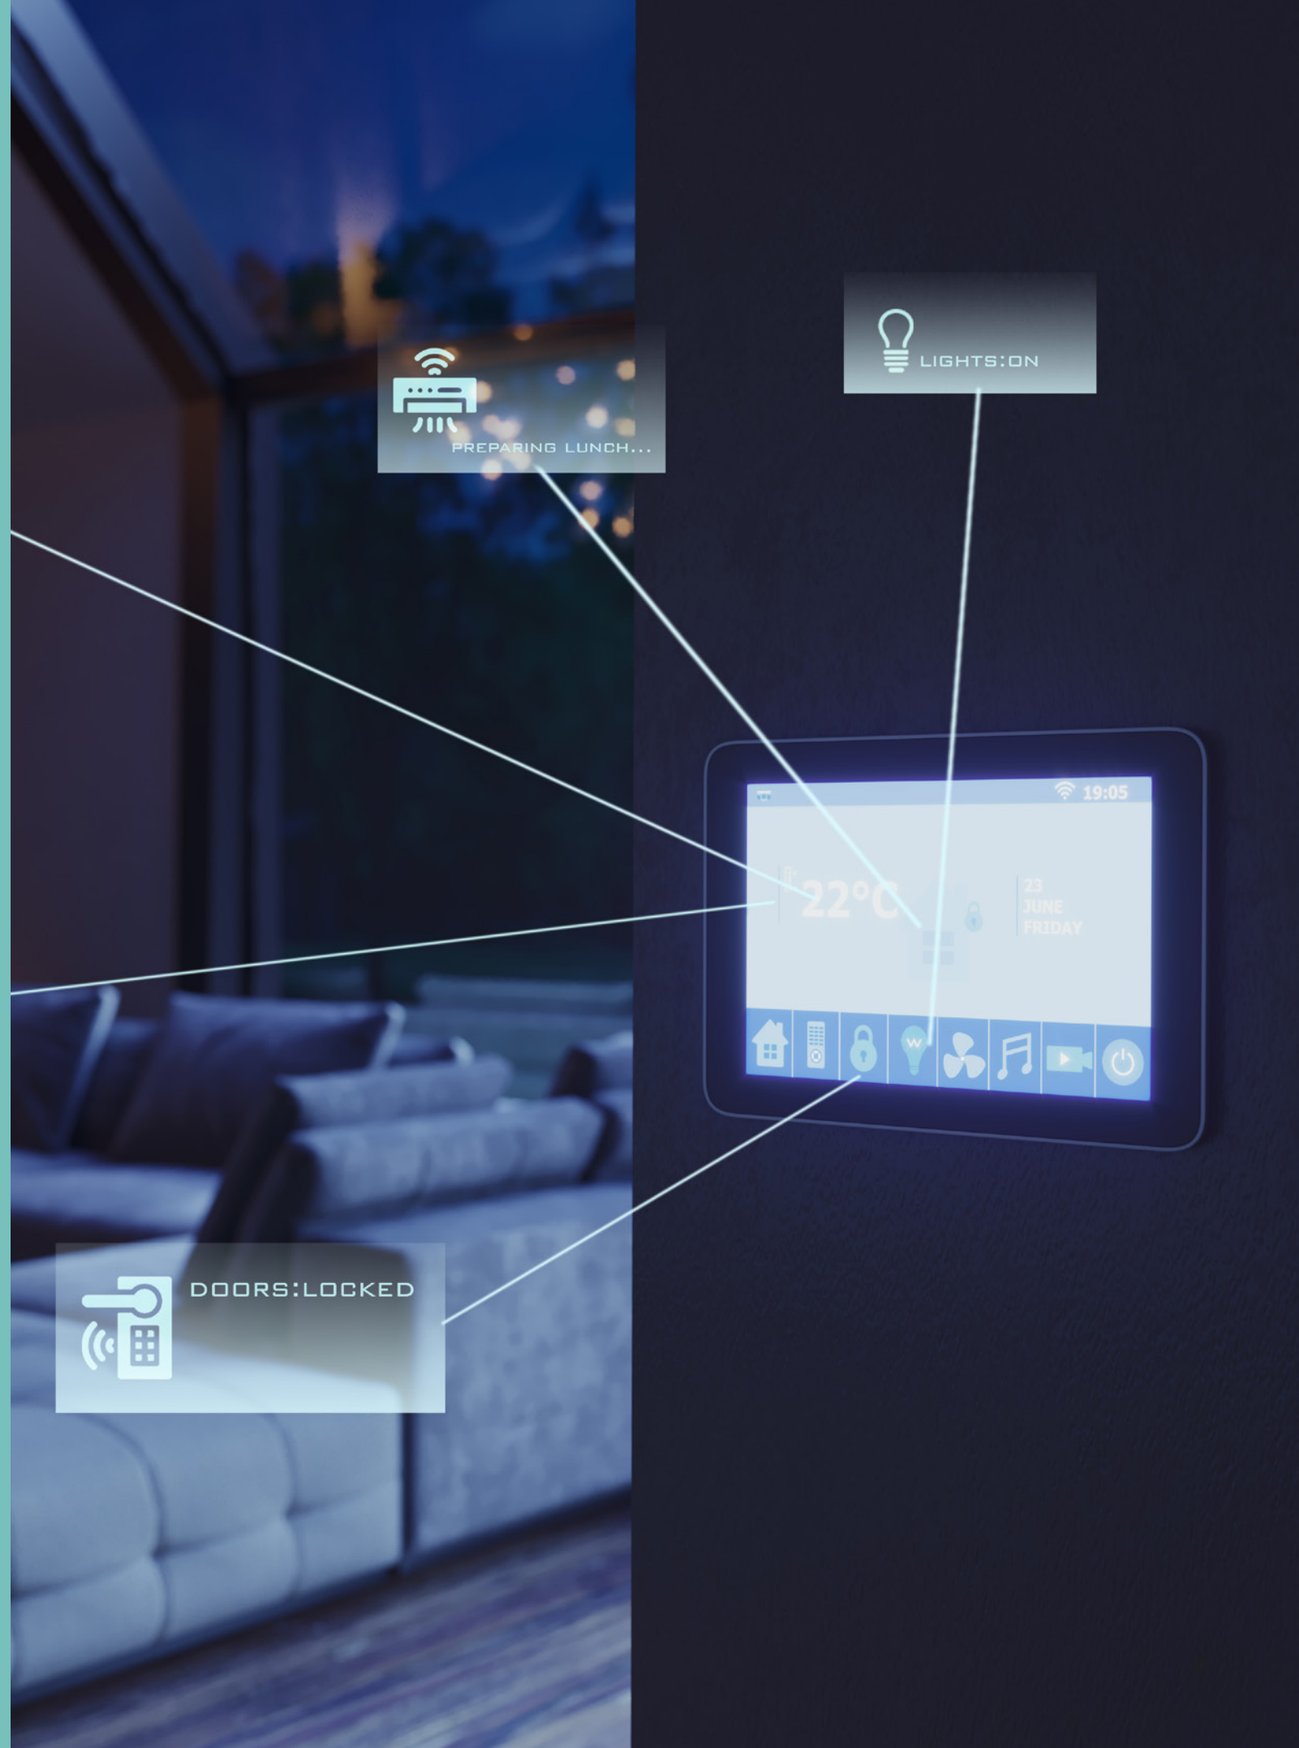

Where Convenience Meets Innovation.

Customizable Controls

Dual Relay Channels

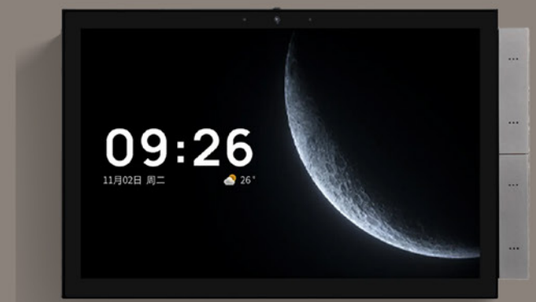

Model: LI310293
Zigbee 3.0 10.1 Inch Touch Panel

Smart Integration

Clock & Reminders

Calendar Support

10.1-Inch Smart Control Touch screen

Enjoy a crystal-clear, intuitive interface for seamless control and enhanced your experience.





Whole-house controlin

Full tuya ecosystem. Every smart device, one glance away.




Smart Integration

Manage smart devices and activate intelligent scenes.



The Heart of Everything

United. 128+ Devices, zero lag, local execution that never sleeps.

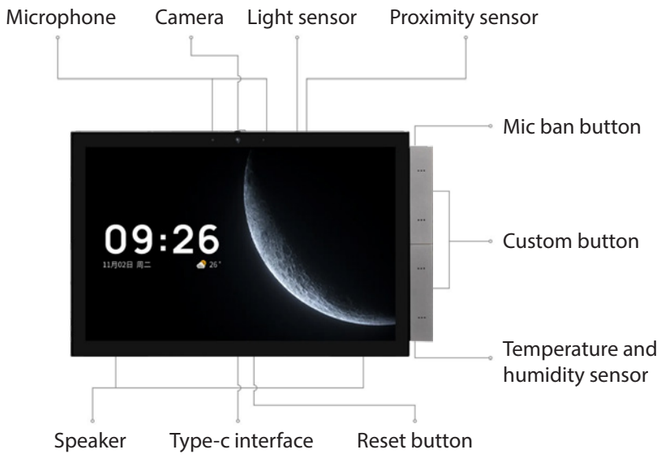

Code No. LI310293

Operating System	Android 11
Power Supply	100 ~ 240 VAC, 50/60Hz/12V 1A type-C
Display Screen	1920×1200 FHD
Touch Screen	10.1-inch touch screen
Bluetooth	Yes
WiFi	Yes
ZigBee	Yes, ZigBee3.0
RAM/ROM	2G/8G
USB	Yes, TYPE C
Ethernet	1*100M RJ45 (EU not included)
Working Temperature	0 ~40 °C
Size(Appearance)	259*161*13mm
Colour	Black+Grey



10.1-inch
Video Intercom Panel



Model: CH-LIKSMTZ
KNX 10.1 Inch Touch Panel

10.1" IPS
Display

Video
Intercom

Aluminum
Faceplate

30 KNX
Scene Functions

24 Alarm
Functions

Homepage
Function Available

Video Intercom

Smart touch panel for both KNX and video intercom







120 KNX Channels

Switch, Dimming, Blinds, RGB/Color Temp, Audio, Temp Control,
AC, Ventilation, Air Quality, and Energy Metering.



Code No. CH-LIKSMTZ

Power Supply	Temperature
Bus voltage 21-30V DC, via the KNX bus	Operation -5 °C ... + 45 °C
Bus current <3.8mA/24V,<3.4mA/30V	Storage -25 °C ... + 55 °C
Bus consumption <0.1W	Transport-25 °C... +70°C
Auxiliary Supply	Environment
Voltage 12-30V DC	Humidity <93%, except dewing
Current <350mA/24V, <280mA/30V	Installation
Consumption <8W	In a conventional 86mm or double 60mm wiring box
	Dimension/Weight
	248mm*154.6mm*34.4mm/0.8Kg



8 Inch Touch Screen





Model: LI-HP-M20
Zigbee 3.0 8 Inch Touch Panel

Local Music Playback

Customizable Controls

Dual Relay Channels

Smart Integration

Clock & Reminders

Calendar Support



Code No. LI-HP-M20

CPU	Cortex-A53 1.5G
Power Supply	220V,50Hz/AC
Operating System	Android 10.0
Display Screen	8-inch HD IPS LCD 1280*800
Touch Screen	G+G
Bluetooth	Yes
WiFi	Yes, 5G+2.4G
ZigBee	Yes, ZigBee3.0
RAM	1G/8G
TF card	Yes, Up to 32GB
USB	Yes, TYPE C
Ethernet	10/100M Ethernet
Working Temperature	0 to +40 °C
Size(Appearance)	254.4mm*124.4mm*11.7mm
Colour	Grey



7 Inch Touch Panel





SIP Video
Intercom

Smart Scene
Management

Support to 2.4G
WiFi,Bluetooth,Ethernet





Code No. CH-LIKSMT7

Bus voltage	21-30V DC, Via KNX bus
Bus consumption	<100mW
Auxiliary current	<170mA/24V DC, <150mA/30V DC
Dimension	180*86*36 mm
Bus current	<3.8mA/24V DC, <3.4mA/30V DC
Auxiliary voltage	12-36V DC
Auxiliary consumption	<4.5W

Extension Sub Panel

Designed to expand the control capabilities of your KNX or smart home system, offering both knob and button designs to suit different user preferences and functional needs.



Code No. CH-LISRWC

7 Inch Extension Sub Panel Rotary with Camera



Code No. CH-LISRW1

7 Inch Extension Sub Panel Rotary



Code No. CH-LISSP4

7 Inch Extension Sub Panel 4 buttons




Code No. CH-LISESP

7 Inch Extension Sub Panel 4 buttons



6 Inch Touch Panel





Smart Device Management

Smart Scene Management

Timer & Schedule





Code No. LI-HP-M10

CPU	Cortex-A53 1.5G
Operating system	Android 10.0
Touch Screen	G+FF
WiFi	Yes, 802.11 b/g/n
Net Weight	227g
Power supply	220V,50Hz/AC
Display screen	6-inch HD IPS LCD 720*1440
Bluetooth	Yes
ZigBee	Yes, ZigBee3.0
Size(Appearance)	184mm*88mm*10mm



Model: LI-HP-C8
4 Inch Touch Screen
Zigbee 3.0

4 Inch Touch Panel

30+

Device Connectivity

Dual Relay Channels

Ethernet & Wi-Fi Connectivity

Smart & Scene Management

Clock, Weather & Night Mode

Small but Clear
for Efficient Interaction



Code No. LI-HP-C8

CPU	R818 Cortex-A53 quad-core 1.5GHz
Operating system	Android 10.0
Touch Screen	G+FF
WiFi	Yes, 802.11 b/g/n
Color	Dark gray
Power supply	220V,50Hz/AC
Display screen	4-inch HD IPS LCD 480 * 480
RAM/Storage	1G/8G
ZigBee	Yes, ZigBee3.0
Size(Appearance)	86mm*86mm*10mm





Code No. CH-LIKSMT3

Bus Voltage:	12-30V DC, Via KNX bus
Bus Current	<3mA 30V DC
Bus Consumption	<90mW
Auxiliary Voltage	12-30V DC
Auxiliary Current	<185mA 12V DC;<80mA 30V DC
Auxiliary Consumption	<2.4W
Dimension	86*86*35.6mm

3.3 Inch Touch Panel



Proximity Sensing

Built-in Temperature &Humidity Sensor

Remote Control Via App

Smart Mini Panel Series

Deliver intuitive control in a sleek, space-saving design.
Perfect for modern smart homes!



Code No. CH-LILCD1

DALI Master Controller
86.5*86.5*40.7mm



Code No. CH-LIOLED

DALI Master Controller Touch Panel
86*86*41mm



Code No. CH-LIEUDT

DT8 DALI Dual Color Touch Controller
86*86*29.1mm



Code No. CH-LIKSMTB

KNX Smart Touch with push button,3-gang
115*86*34.7mm



Mini Thermostat Panel Series

Perfect for managing your home's climate with ease and efficiency.



Code No. CH-LIASTC


Zigbee 3.0 Temperature Controller
86*86*35mm





Outdoor Video Intercom

Model: CH-LIVHOS
Outdoor Station

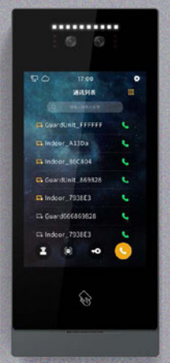

20000
Local
Face Library

Temperature Range:
-20°C to +70°C

4.3mm
Focal Distance

8-Inch
LCD

Light Filling
Mode

Video Intercom Series

Offer robust, weather-resistant solutions designed for seamless communication and security, perfect for entrances, gates, and outdoor environments.



Code No. CH-LIVHOS

Smart Outdoor Station
130*308*26.50 mm




Code No. CH-LIKMOS

Smart Mini Outdoor Station
120*194*44.7mm



Code No. CH-LI7IIM

7 inch Indoor Monitor
182*119*15mm

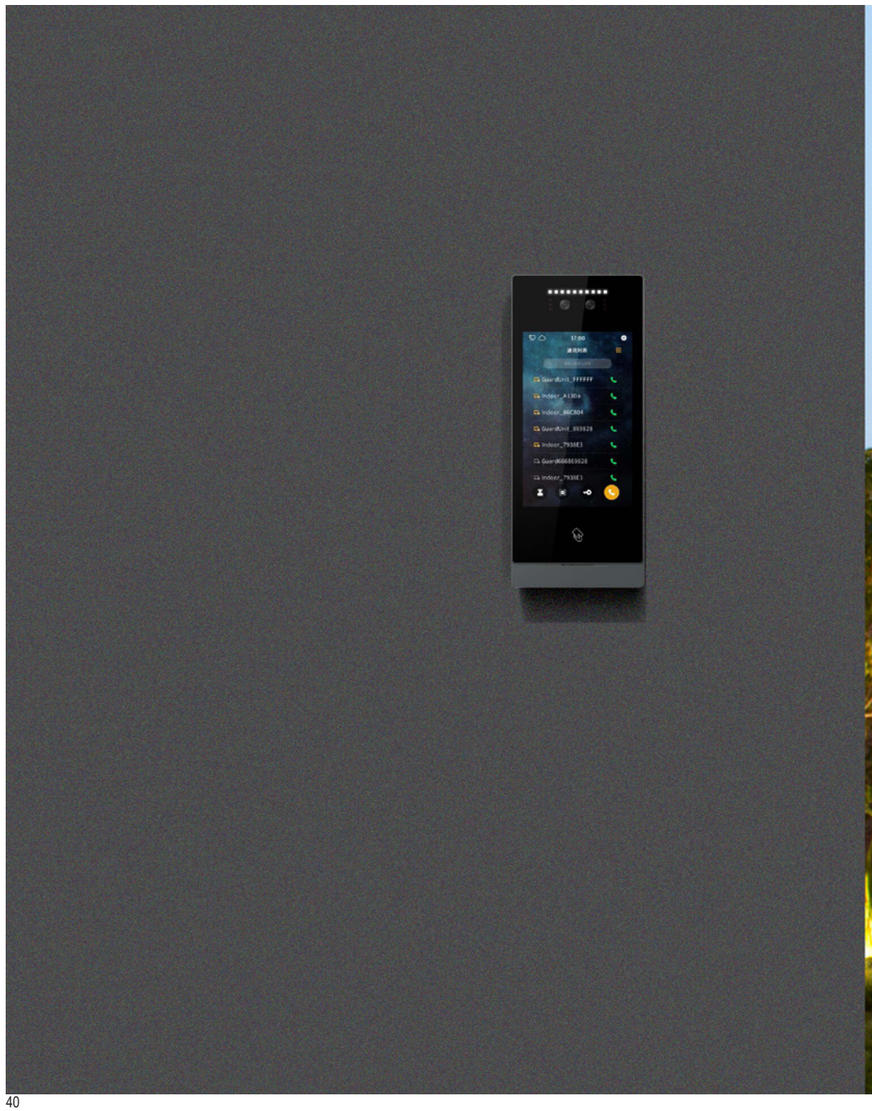



Smart Intercom

Integrated system featuring high-fidelity voice intercom, remote door release, indoor station calling and property management linkage. Robust hardware, straightforward wiring and outstanding compatibility allow quick installation in newly constructed and retrofitted buildings alike.

- Villa
- Hotel
- Office
- Commercial Space



Doorbell

Indoor Monitor



Calling

Intercom

Unlocking

Monitoring

Motion Detection

Easy Installation

Guardian Series

Integrated system featuring high-fidelity voice intercom, remote door release, indoor station calling and property management linkage. Robust hardware, straightforward wiring and outstanding compatibility allow quick installation in newly constructed and retrofitted buildings alike.



Code No. L171200309

Full duplex communication （2MP）
Wide-Angle PAL/NTSC : 1920*1080
2.4mm Lens, With IR Cut,Angle148°
Support IR-CUT, infrared LED5PCS
With Exit Button Function
Support Set intercom Volume
Suitable for different electronic lock
Video compression:H.264
Audio compression :G.711 compression
Full duplex video intercom
Power(optional):DC12V~48V,standard POE
With IC card & Password unlock function, capacity 200PCS



Code No. L171200308

7/10" IPS indoor monitor with full duplex communication
Supports TUYA Smart APP
2.4G WiFi connect to internet, support Android & iOS
3 Different styles UI menu for selection
Multi-Language are available for different markets
Resolution 1024*600 with glass touch screen
Support max.1TB SD Card (Class 10 preferred)
Video intercom , monitoring and unlock
Max. 6 indoor monitors+4 outdoor stations+4 IP cameras in one apartment
Support photo capture and video record and motion detection

Smart Doorbell



One-Touch Calling

Night Vision Mode

Motion Detection

Tinlay Series



Code No. L171200310

Material: Aluminum+Tempered Glass
Connection Method: LAN (Optional Wi-Fi)
IP Rating: IP65
Audio Decoding: G.711
Working Voltage: DC12V or POE power supply
Working Temperature:-20°C to+70°C
Operation Method: Mechanical button
Camera: High-definition 2-megapixel
Network Configuration: DHCP
Video Coding: H.264/H.265
Working Current: 400mA
Dimensions: 159.5mm*75mm*28mm


Tinlay Series



Code No. L171200311

Camera Sensor: 1/2.9"CMOS
Video Resolution: 1920*1080
Video compression: H.264
View Angle:148°
Light Compensation: Auto IR
DSP: MT816
Interoperability:ONVIF
Tuya App: Support
Mobile Operating System: iOS/Android
Operating Temperature: -40°C to+50°C

Smart Doorbell

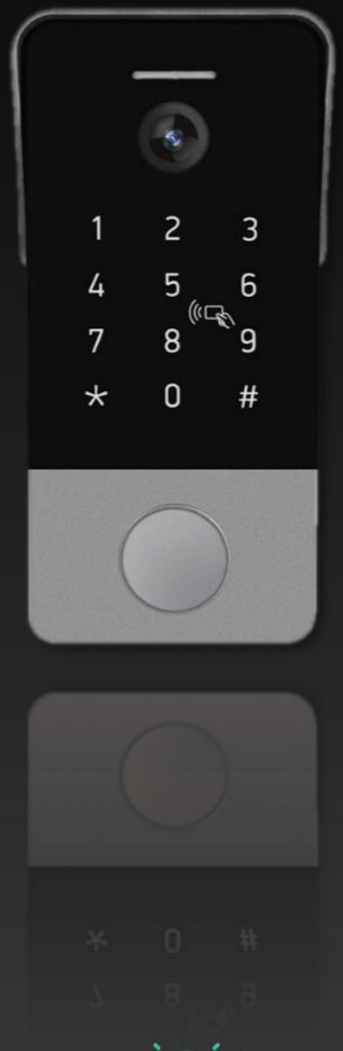

One-Touch Calling

Night Vision Mode

Motion Detection

POE Switch



POE4 POE8 POE16 POE24

Code No. L171200312

Power:AC110-220V
Total Power Output:120W
Maximum Power for single port:30W
Protocol:IEEE802.3AF/AT
4/8/16 ports with power output
2 ports only for data transfer
Suggest cascading no morre than 3 levels

Tuya Zigbee Smart Intercom Family Products

Guardian Series



L171200309
Doorbell



L171200308
Indoor Monitor

Tinlay Series



L171200310
Doorbell



8-Inch Smart Control Touch Screen
LI71200166



L171200311
Doorbell



6-Inch Smart Control Touch Screen
LI71200070

POE Switch



L171200312
POE4 Switch



L171200312
POE8 Switch



L171200312
POE16 Switch



L171200312
POE24 Switch

Precision Control, Playful Design.

Model: CH-LI00RB
DALI MCU Rotary Dimming Panel



4MM

Standard Diameter
Rotary Axis

Built-in DALI
Power Supply

Multi-Unit
Control

Scene
Memory

Double Click for
100% Brightness

Compact & Sleek Design

Ideal for effortless installation and modern spaces, combining functionality with a clean, stylish look.



Counterclockwise to Increase:
Brightens light from 1% to 100%.

Clockwise to Decrease:
Dims light from 100% to 1%.


1-100% Precision Dimming

Effortlessly adjust brightness with a simple twist

Scene Memory

Save and recall your preferred brightness settings.



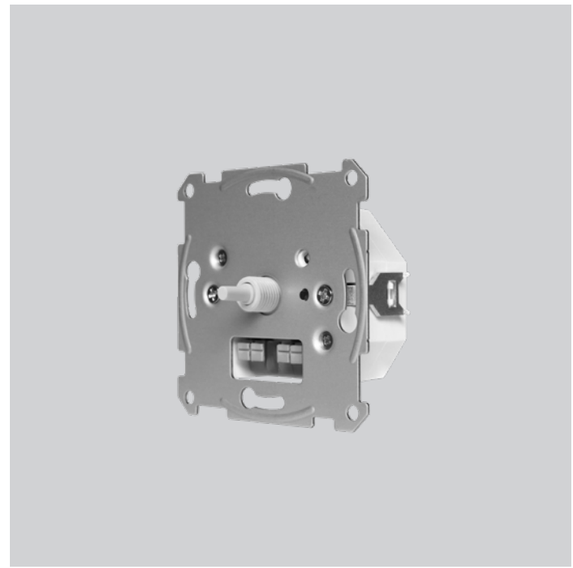

Code No. CH-LI00RB

Operating voaltage	100-240V AC
Power consumption	2.3W max.
Ambient temperature	0~+50 °C
Type of protection	IP 20
Protection class	II
Dimensions	80x80x53mm

Knob Panel Series

Offer precise control with easy-to-use rotary knobs
for seamless adjustments.



Code No. LI71200088

PC Knob Thermostat
86*86*38mm



Code No. LI71200116

PC Knob Thermostat
86*86*38mm





Smart Door Lock

Our Smart Door Lock combines cutting-edge technology with seamless convenience, offering a variety of unlocking methods for enhanced security and ease of access.

Whether you're at home or on the go, our Smart Lock ensures that your property is always protected.

- Villa
- Hotel
- Office
- Commercial Space







Face
Unlocking

Fingerprint
Unlocking

Remote
Unlocking

Video
Intercom

Whole-House
Smart Integration





Code No. LI71200259

Material	CNC-Machined Aluminum
Available Color	Black
Storage Capacity	250 sets (50 Face + Fingerprint + Password + Card)
Connectivity	Tuya WiFi, Tuya ZigBee
Emergency Lock Cylinder	Super Class-C Cylinder
Power Supply	7.4V 4200mAh
Operating Temperature:	-20°C to 50°C
Door Thickness Compatibility	40–120 mm



Face
Unlocking



Face
Unlocking

Fingerprint
Unlocking

Remote
Unlocking

Video
Intercom


Comprehensive
Security Alerts





Code No. LI71200261

Material	CNC-Machined Aluminum
Available Color	Black
Storage Capacity	250 sets (50 Face + Fingerprint + Password + Card)
Connectivity	Tuya WiFi, Tuya ZigBee
Emergency Lock Cylinder	Super Class-C Cylinder
Power Supply	7.4V 4200mAh
Operating Temperature:	-20°C to 50°C
Door Thickness Compatibility	40–120 mm

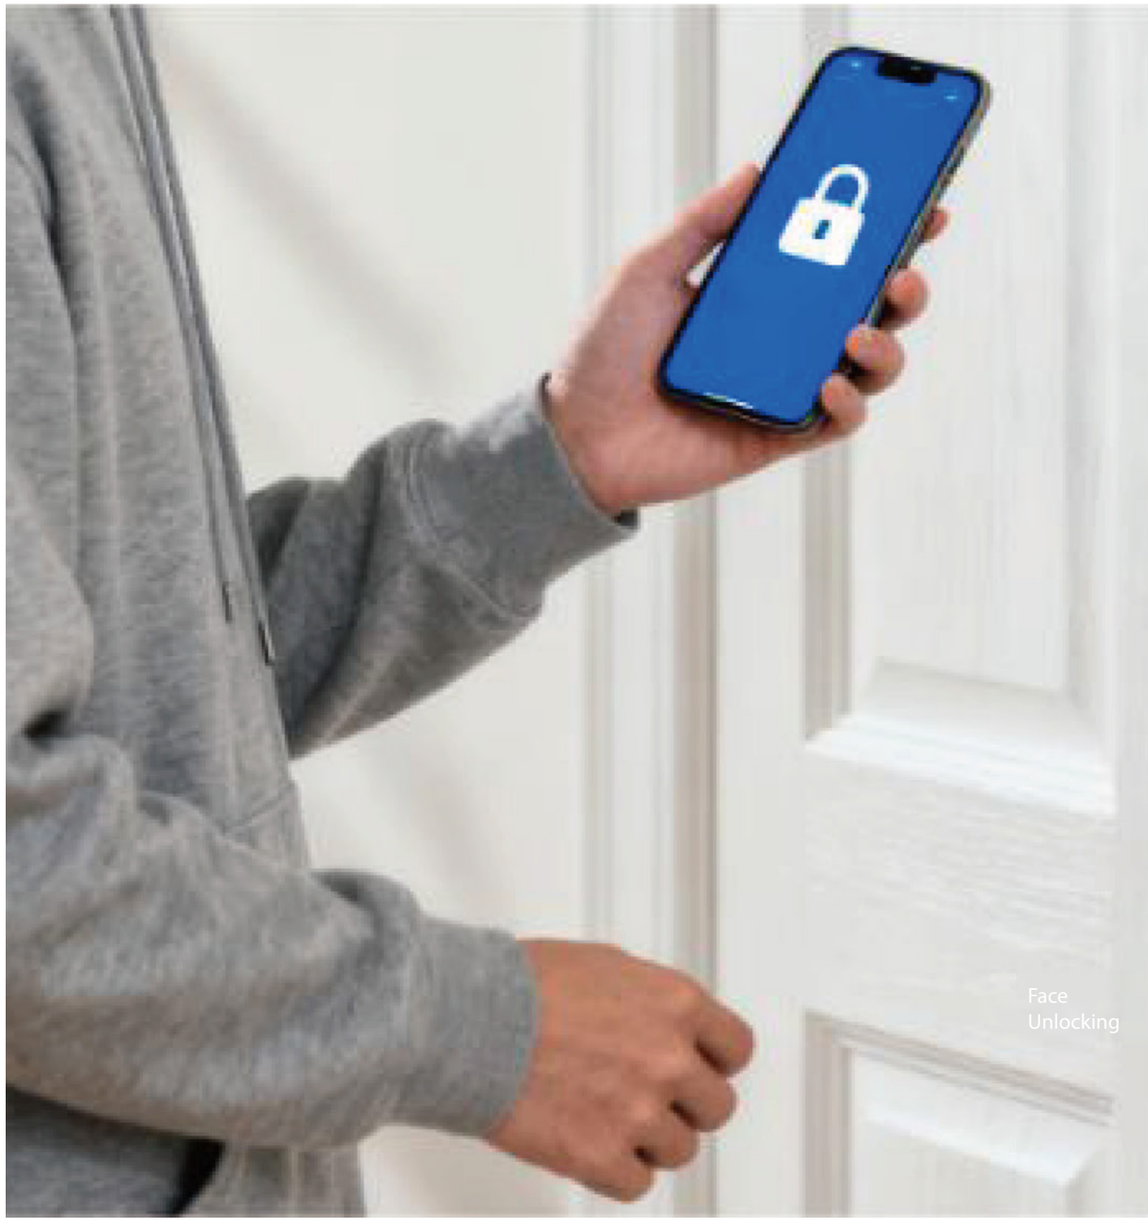

Face
Unlocking



Face
Unlocking

Fingerprint
Unlocking

Remote
Unlocking

Video
Intercom

Whole-House
Smart Integration





Code No. LI71200260

Material	CNC-Machined Aluminum
Available Color	Black
Storage Capacity	250 sets (50 Face + Fingerprint + Password + Card)
Connectivity	Tuya WiFi, Tuya ZigBee
Emergency Lock Cylinder	Super Class-C Cylinder
Power Supply	7.4V 3500mAh+3500mAh
Operating Temperature:	-20℃ to 50℃
Door Thickness Compatibility	40–120 mm

Smart Ceiling Speaker

Smart Ceiling Speaker. Flush ceiling mount design delivers clear and transparent sound. It supports intelligent system linkage, integrating background music, voice announcement and intercom audio amplification functions. Easy to install with great compatibility, suitable for various commercial buildings and smart communities, serving as an invisible and efficient indoor audio terminal.

- Villa
- Hotel
- Office
- Commercial Space



Smart Ceiling Speaker



3mm
Slim Design


ABS Flame
Retardant Material

Easy
Installation



Code No. LI71200297

Product Dimensions: 235*92mm
CRated Impedance: 8Ω
Rated Power: 30-60W
Peak Power: 80W
Sensitivity: 90dB
Frequency Range:70Hz-20KHz
Hole Size: Φ205mm

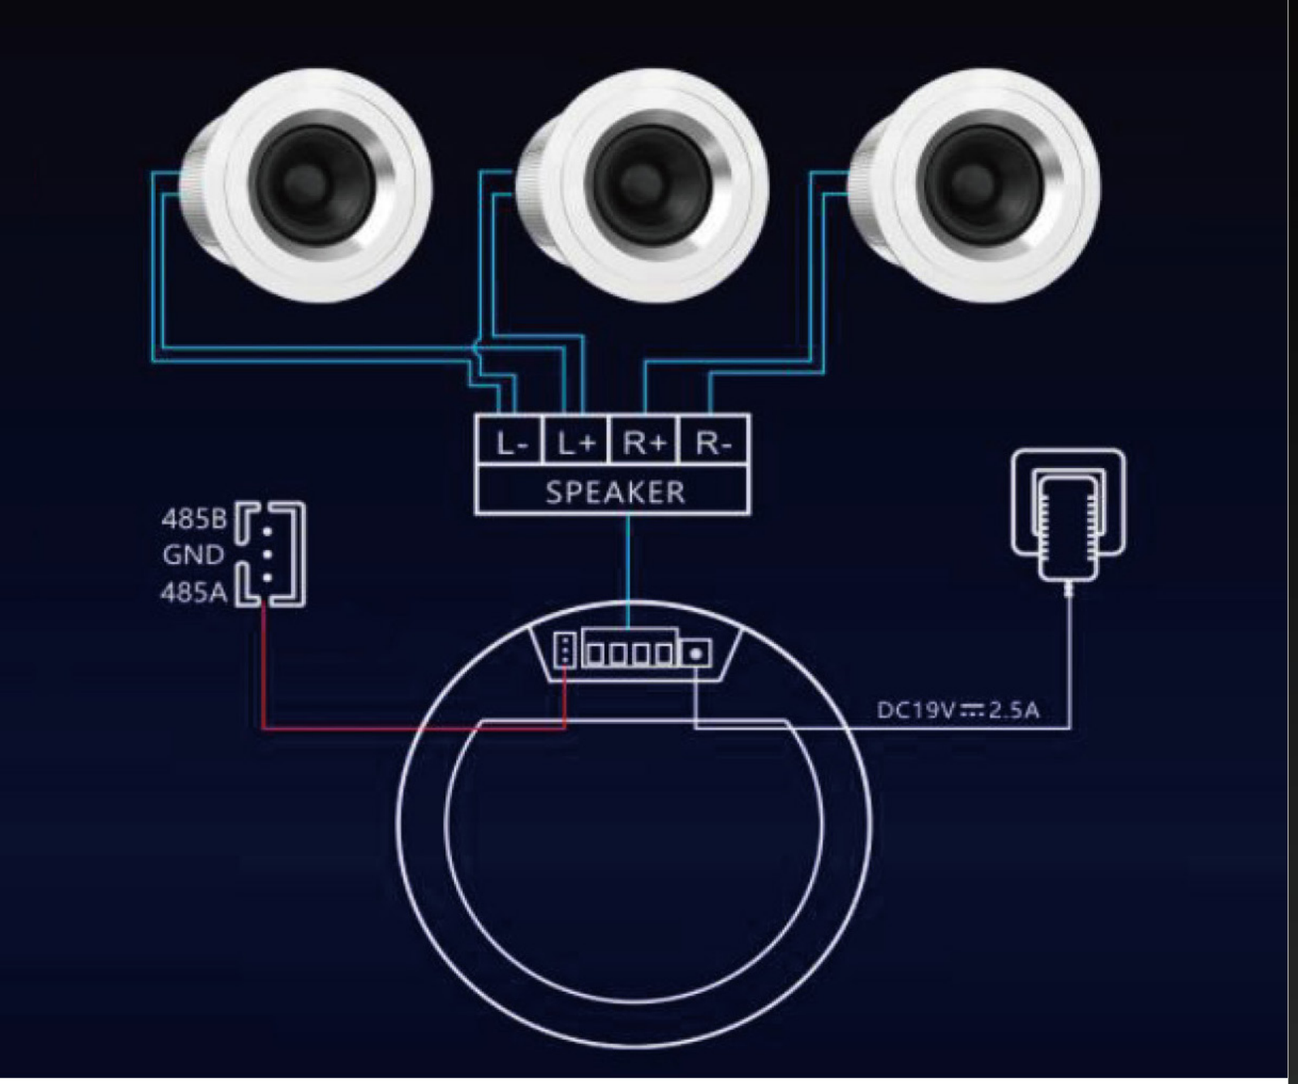

Code No. LI71200296

Product Dimensions: :Φ207x88(H)mm
DCR:5.4±15%Ω
Rated Impedance: 8±15%Ω
Rated Power: 20W+20W
Transmission Distance: ≤10M
Operating Temperature: 0-40℃
Operating Humidity: ≤60%
Opening Size: Φ180mm

Smart Ceiling Speaker



Wireless
Bluetooth Audio

No Wiring
Needed

Easy
Installation

Smart Camera

Smart Camera supports intelligent detection and remote viewing, and can connect to building security systems to build a visual security defense line.

- Villa
- Hotel
- Office
- Commercial Space



Smart Home View Camera



2.4GHz & 5GHz
WiFi network

APP Control

Motion Detection



Code No. LI71200265

Operation method: Tuya Smart APP
Resolution: 2560*1440
Infrared night vision: 10m black and white night vision
Noise Reduction: 3D-NR
Full color night vision: Support
Pan&Tilt: horizontal 355 degrees, Vertical 60 degrees
Light sensitivity: 0.1lux
Video compression: H.264
Network transmission: Support 2.4/5GHz wireless network; support WPA and WPA2 encryption
Power Supply: DC5V 1A
TF card storage (optional) : Max. 128GB
Operating Temperature: -10~45°C
Relative Humidity: 10%~90%(RH)
Dimension: 117x Φ71 mm



Code No. LI71200295

Operation method: Tuya Smart APP
Resolution: 4MP
Infrared night vision: 10m effective distance
Noise Reduction: 3D-DNR
Full color night vision: Support
Pan&Tilt: Horizontal 360 degrees, Vertical 90 degrees
Light sensitivity: 0.1lux
Video compression: 2D/3D-DNR&WDR & H.265
Network transmission: Support 2.4GHzwireless network; support WiFi6
Solar panel: 3W
Battery capacity: 2 x 18650 battery, 6000mAH
TF card storage (optional) : Max. 128GB
IP rating: IP65
Operating Temperature:-20~50°C
Relative Humidity: 10%~90%(RH)

Smart Wi-Fi Outdoor Camera



360º view

0-9M
Long Detecting Range

IP65 Rating

Smart Home View Camera



2.4GHz & 5GHz
WiFi network

APP Control

Motion Detection



Code No. LI71200266

Operation method: Tuya Smart APP
Resolution: 2304*1296
Infrared night vision: 10m black and white night vision
Noise Reduction: 3D-NR
Full color night vision: Support
Pan&Tilt: horizontal 355 degrees, Vertical 60 degrees
Light sensitivity: 0.1lux
Video compression: H.264
Network transmission: Support 2.4GHz
Power Supply: DC5V 1A
TF card storage (optional) : Max. 128GB
Operating Temperature: -10~45°C
Relative Humidity: 10%~90%(RH)
Dimension: 170x Φ71 mm


Smart Sensor

With the smart IR remote and app, easily control infrared devices like your AC, TV, and set-top box with a single tap. Leveraging network connectivity, you're no longer limited by time or distance. Turn on the AC and set the perfect temperature before heading home — so you arrive to a perfectly comfortable environment.

- Villa
- Hotel
- Office
- Commercial Space



Tuya Infrared Remote Control

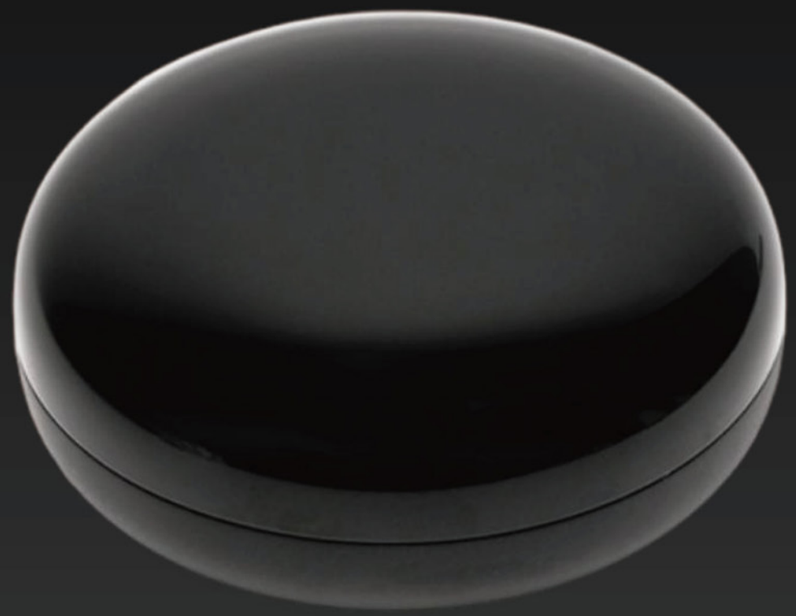

Infrared Control


Remote Control

Voice Control



Code No. LI71200257

Size: Custom
Module: TYWE3S, WR3, WR3E, WB3S, WBR3
Power Input: DC 5V/1A (Micro USB 2.0)
Standby Power Consumption: ≤0.4W
Control Distance: Horizontal ≤8m, Direct Line-of-Sight ≤15m (Actual distance may vary depending on environment)
Number of IR Transmitter Tubes: 7
Number of IR Receiver Tubes: 1
IR Control Direction: Multi-directional
Operating Temperature: -10°C to 50°C
Operating Humidity: ≤85% RH
Connection: 2.4GHz 802.11b/g/n
Carrier Frequency: 38kHz
APP Support: Android 4.0 / iOS 8.0 and above

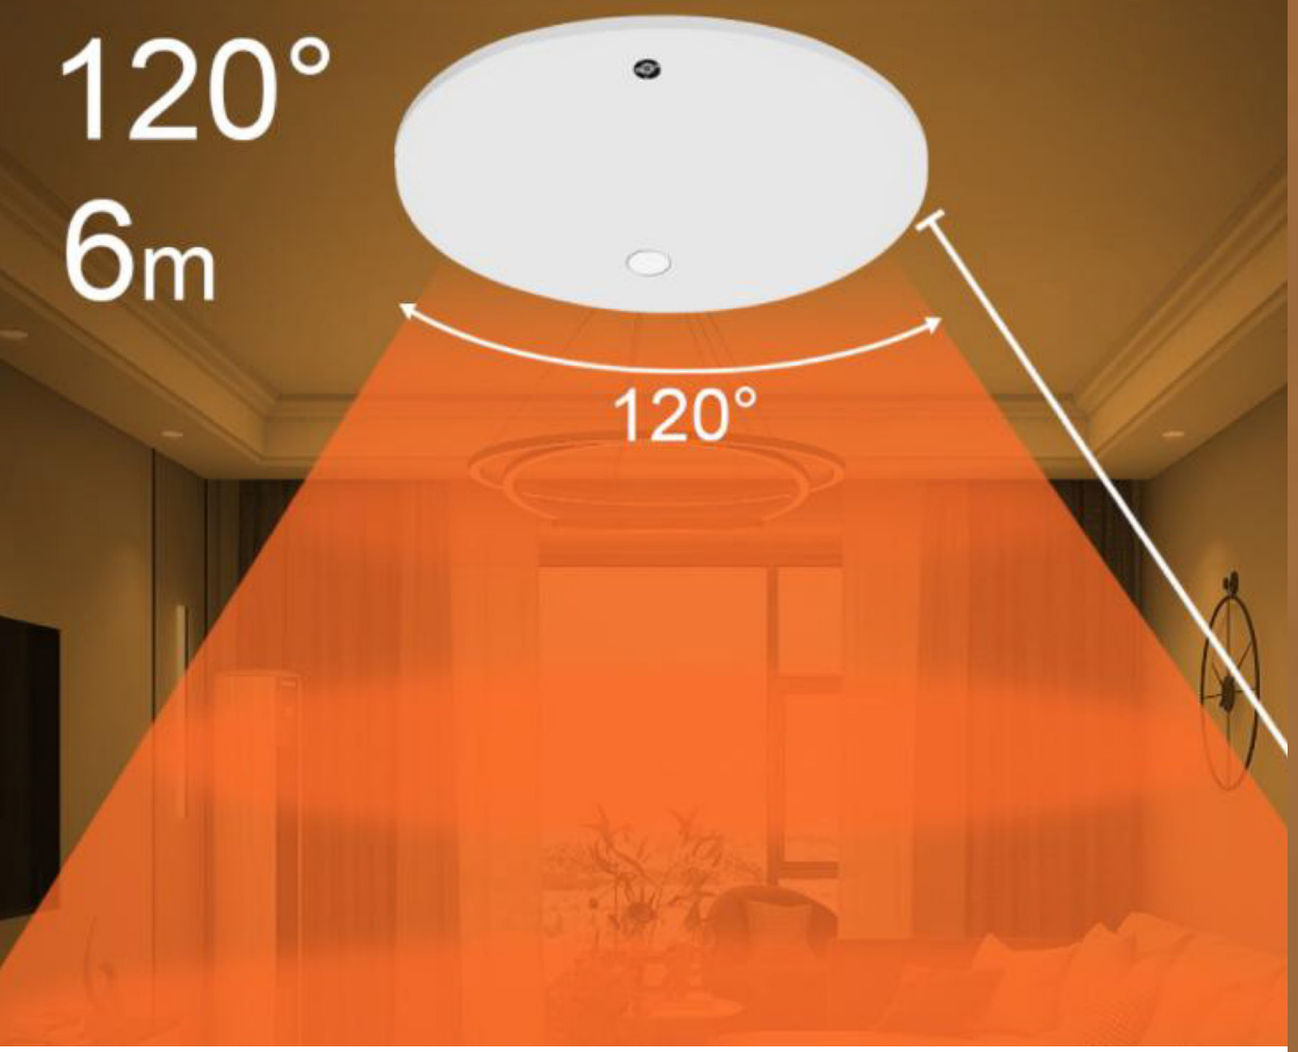

Code No. LI71200293

Working Mode: Active detection
Influence By Ambient: Airflow
Detction Sensitivity: Can detect breathing, heartbeatand other subtle movements
Detection Distance: Support
Detection Direction: 360°(front)
Control Function: Support

Human Presence Sensor & Controller

It uses 24GHz millimeter-wave radar technology and can identify the presence of the human body by actively detecting subtle movements (breathing, heartbeat, limb movements, etc.).

WI-FI 4 WIFI4 | ZigBee | Android | IOS IOS | Smart Life | Scenes



Tuya 2 in 1 PIR Motion Sensor Brightness


With the smart IR remote and app, easily control infrared devices like your AC, TV, and set-top box with a single tap. Leveraging network connectivity, you're no longer limited by time or distance. Turn on the AC and set the perfect temperature before heading home — so you arrive to a perfectly comfortable environment.



Small & Exquisite

PIR Motion

Intelligent Security Linkage

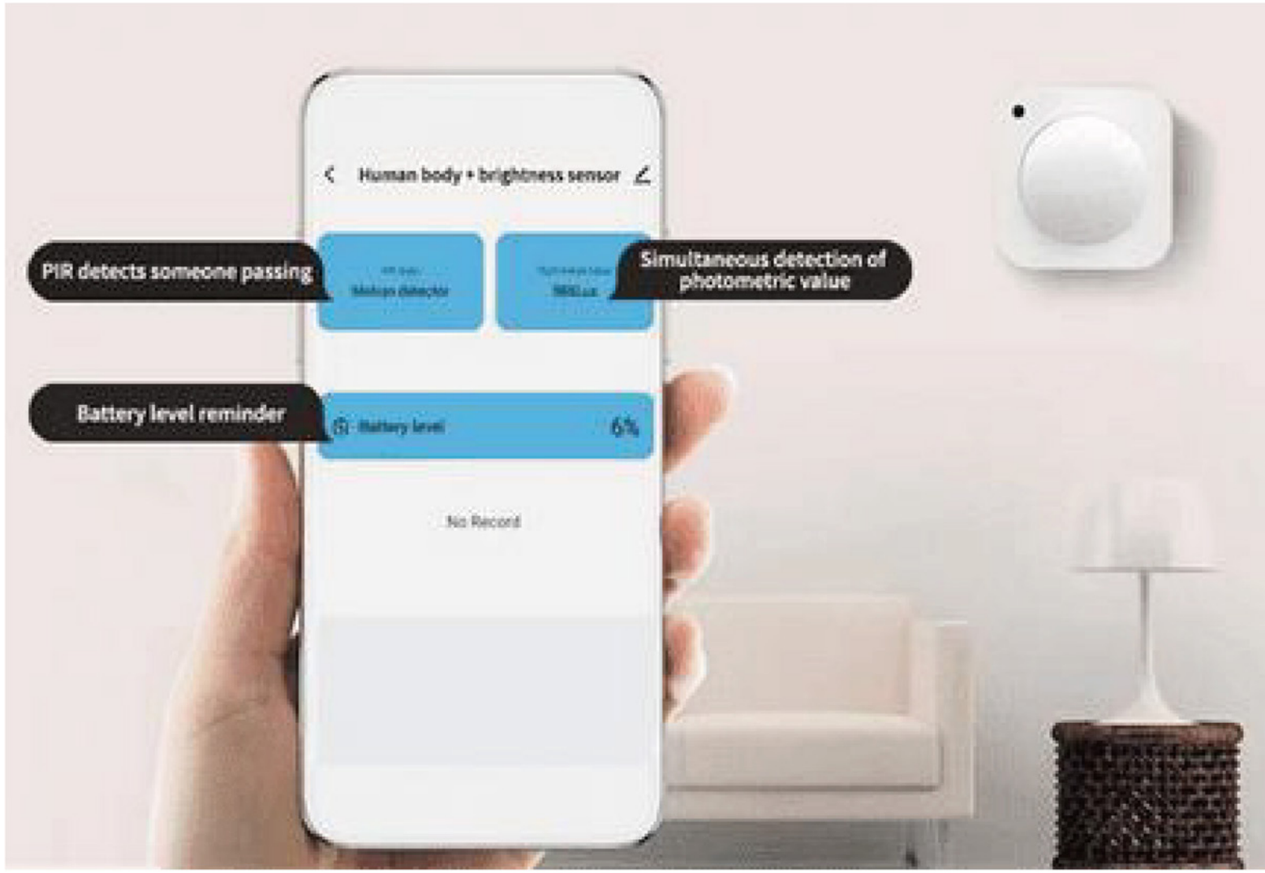

Code No. LI71200294

Operation method: Tuya Smart APP
Resolution: 2304*1296
Infrared night vision: 10m black and white night vision
Noise Reduction: 3D-NR
Full color night vision: Support
Pan&Tilt: horizontal 355 degrees, Vertical 60 degrees
Light sensitivity: 0.1lux
Video compression: H.264
Network transmission: Support 2.4GHz
Power Supply: DC5V 1A
TF card storage (optional) : Max. 128GB
Operating Temperature: -10~45°C
Relative Humidity: 10%~90%(RH)
Dimension: 170x Φ71 mm

Smart Curtain

The soft and graceful mesh, with its undulating curves, creates exceptional visual comfort. It can be dimmed left and right, adjusting light incidence over a wide range of angles. It offers the softness and warmth of fabric, yet is simpler and more stylish, with a 179-degree dimming function unavailable with fabric curtains. It eliminates the wind-induced noise associated with vertical blinds and is suitable for living rooms, dining rooms, offices, cafes, and high-end hotels.

- Villa
- Hotel
- Office
- Commercial Space



Smart Curtain Opening & Closing Series

Smart Opening & Closing Curtain Motor



Hidden Installation

< 28dB

Ultra-Silent Motor

Versatile Control

Scene Automation

14,000 Cycle Endurance Test


65kg

High Load Capacity

Code No. LI71200269


Dimensions: 312 × 70 × 50 mm
Protection Rating: IP20
Power Cord: Chinese Standard Two-Pin Plug (Xiaomi Compatible)
Cord Length: 1 m
Rated Torque: 1.2 N·m
Rated Speed: 50 rpm
Rated Power: 24 W
Operating Voltage: AC 100–240 V
Operating Frequency: 50/60 Hz
Operating Current: 0.25 A
Operating Speed: 14 cm/s
Operating Temperature: –10 ℃ to 50 ℃
Insulation Class: E
Running Time: S2, 2 min
Noise Level: < 40 dB
Remote Frequency: 433 MHz
Wireless Frequency: 2.4 GHz
Max Load: 50 kg
Recommended Load: ≤ 30 kg

Smart Curtain Custom Track

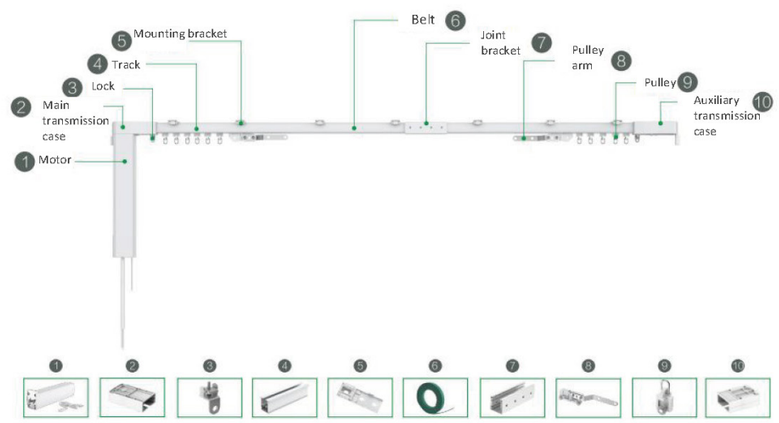


Code No. LI71200271

Smart Curtain Combination Track

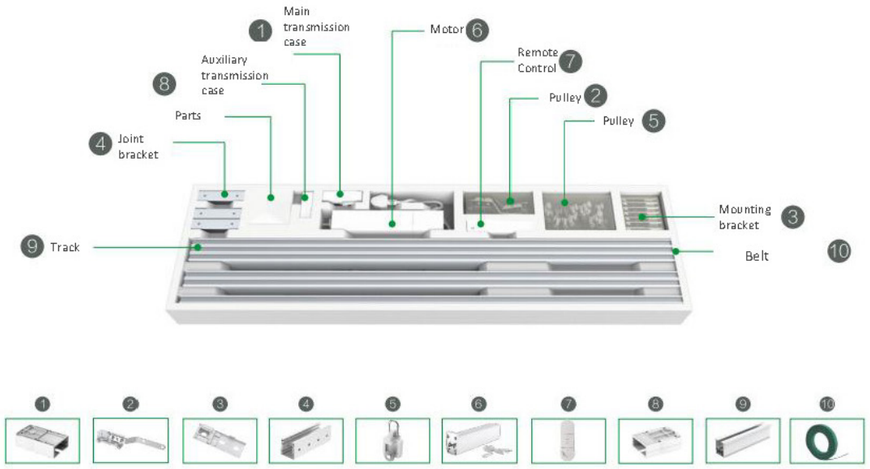

Code No. LI71200277

Smart Curtain Straight Telescopic Track

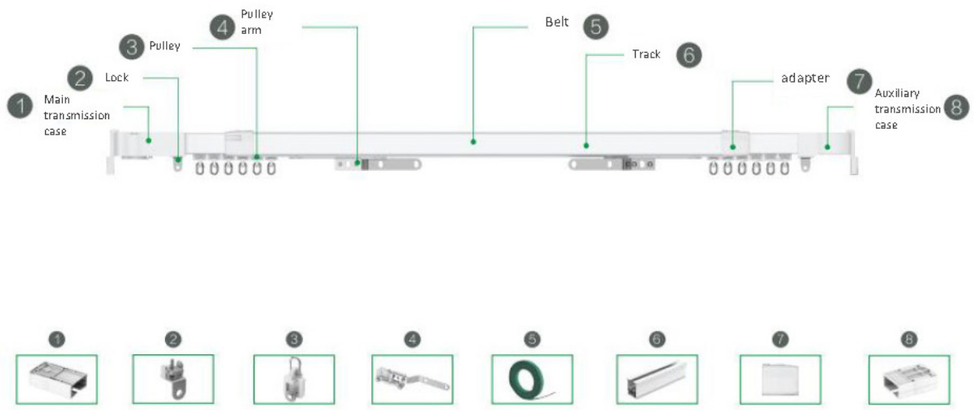

Code No. LI71200272

Smart Curtain Roller Blinds Series

Smart Roller Blind Curtain Motor



Hidden Installation

< 28dB
Ultra-Silent Motor

Versatile Control

Scene Automation

14,000 Cycle Endurance Test

65kg
High Load Capacity

Code No. LI71200285

Dimensions: 440 × φ25 mm
Protection Rating: IP20
Power Cord: 0.75MM² × 2-core
Cord Length: 1 m
Rated Torque: 2.0 N·m
Rated Speed: 28 rpm
Rated Power: 18 W
Operating Voltage: AC 100–240 V
Operating Frequency: 50/60 Hz
Operating Current: 1.5 A
Operating Speed: 4.5 cm/s
Operating Temperature: –10 °C to 50 °C
Insulation Class: E
Running Time: S2, 4 min
Noise Level: < 40 dB
Remote Frequency: 433 MHz
Wireless Frequency: 2.4 GHz
Max Load: 10 kg
Recommended Load: ≤ 7.5 kg

Smart Roller Blind






Code No. LI71200298

Roller blinds are a classic product widely used in the sunshade industry, offering numerous advantages, including aesthetically pleasing simplicity and a durable structure. They soften indoor light, shielding against direct sunlight and achieving an ideal sunshade effect that saves energy.

Venetian Blind

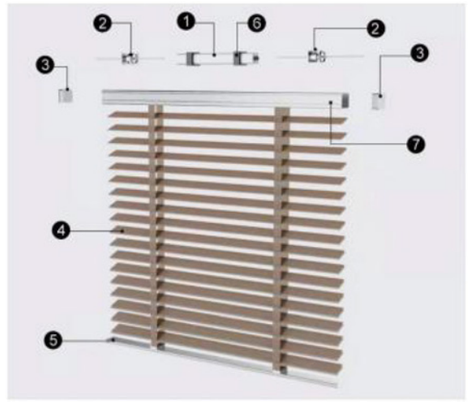




Code No. L171200287

Venetian blinds offer flexible 180-degree dimming, surpassing other window treatments. Simple and rigid, with clean lines, these blinds are UV-resistant,radiation-free,and antibacterial, creating a fresh, clean, and uncluttered atmosphere.

Shangri-La Curtain



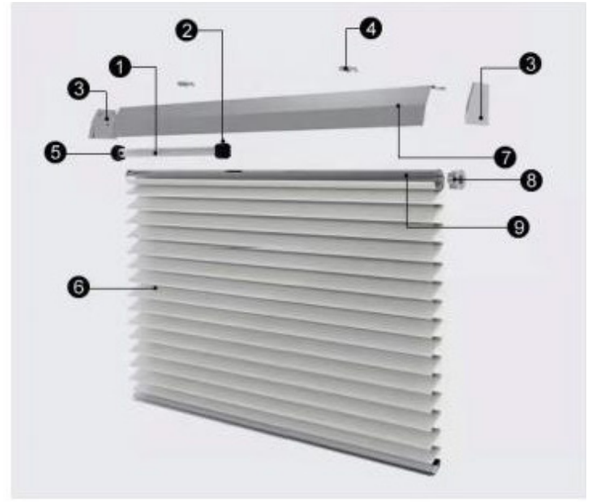


Code No. LI71200288 / LI71200289

Originating from Europe and the United States, the curtain fabric is woven from a double layer of sheer yarn with several layers of fiber slats in between, creating a product that seamlessly combines window screens, Venetian blinds, and roller blinds. The curtain fabric is woven from a double layer of sheer yarn with several layers of fiber slats in between, creating a product that seamlessly combines window screens, Venetian blinds, and roller blinds.

Smart Curtain
Dream Blinds Series

Smart Dream Blind Motor

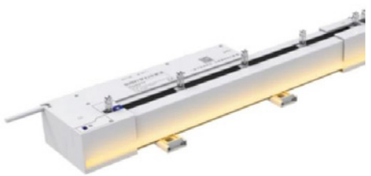

Built-in
LED driver 2-in-1

High-temperature
resistant materials

Versatile
Control

Smart
speaker control

Luminous track

Timer on and off

Code No. LI71200300

Dimensions:285 mm
Power:100W
Input voltage:AC100-240
LED Current:24V
LED Voltage:2.5A
Receiving Frequency:868MHz
Weight:0.8kg

Smart Dream Blind Track



Code No. LI71200301

Smart Dream Blind



Code No. LI71200302

The soft and graceful mesh, with its undulating curves, creates exceptional visual comfort. It can be dimmed left and right, adjusting light incidence over a wide range of angles. It offers the softness and warmth of fabric, yet is simpler and more stylish, with a 179-degree dimming function unavailable with fabric curtains. It eliminates the wind-induced noise associated with vertical blinds and is suitable for living rooms, dining rooms, offices, cafes, and high-end hotels.

Tuya Zigbee Smart Curtain Family Products

Opening & Closing Series



LI71200269
Curtain Motor



LI71200271
Custom Track



LI71200272-LI71200276
Inline Telescopic Track



LI71200277-LI71200284
Combined Track Set


Roller Blind Series



LI71200285
Curtain Motor



LI71200298
Roller Blind



LI71200288-LI71200289
Shangri-La Curtain



L171200287
Venetian Blind

Dream Blind Series



LI71200300
Curtain Motor



LI71200301
Curtain Track



LI71200302
Smart Dream Blind



LI71200270
Single-channel Remote Control



LI71200286
Remote control

Various Colors


Grey/White/Gold/Black Finishing Available



User-defined

Enable to pair ZigBee lighting devices via touchlink commissioning without coordinator.

Button Panel Fantasy Series

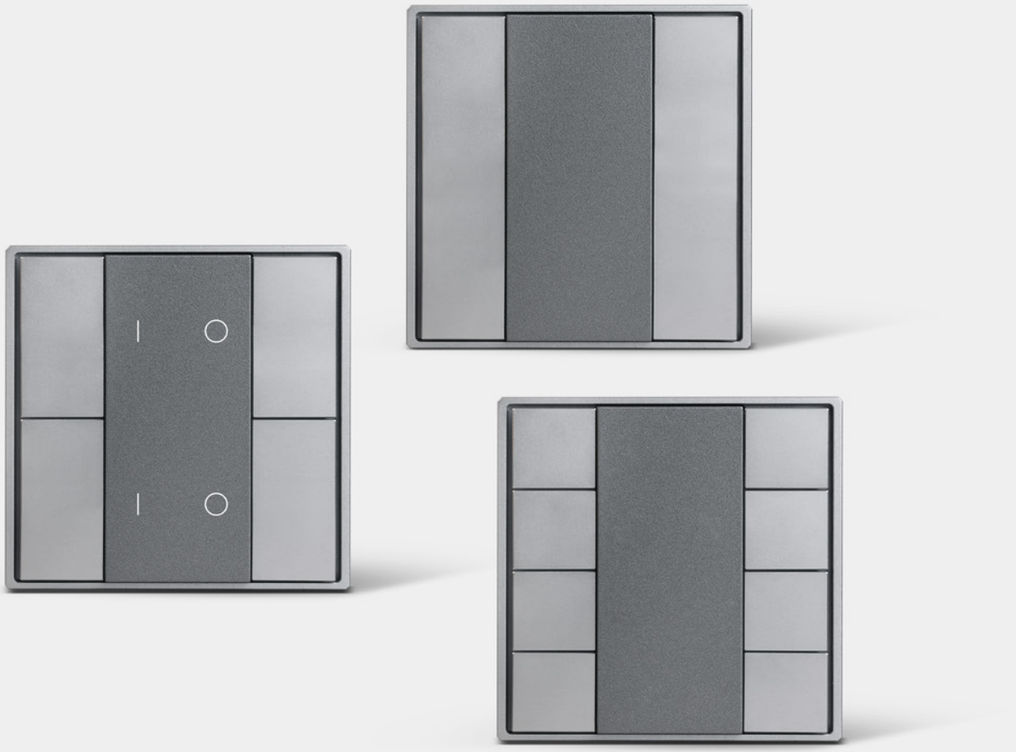

Various Colors

Ultra Slim Design

Easy Installation







Model: CH-LI8DA2

DALI 2-Button Panel
80*80*26.6mm



Model: CH-LI4DA2

DALI 2-Button Panel
80*80*26.6mm



Model: CH-LI2DA2

DALI 2-Button Panel
80*80*26.6mm







Model: CH-LIGS2G

Zigbee 3.0 2 gang Smart Switch
86*86*35.5mm



Model: CH-LIGS3G

Zigbee 3.0 3 gang Smart Switch
86*86*35.5mm



Model: CH-LIGS3F

Zigbee 3.0 3 Gang F type Smart Switch
86*86*35.5mm



Model: CH-LIGS4G

Zigbee 3.0 4 gang Smart Switch
86*86*35.5mm



Model: CH-LIGS4P

Zigbee 3.0 4 Plaid Gang Smart Switch
86*86*35.5mm



Model: CH-LIGS4S

Zigbee 3.0 4 Gang Smart Switch
86*86*35.5mm



Model: CH-LIGS6G

Zigbee 3.0 6 gang Smart Switch
86*86*35.5mm



Model: CH-LIGS6S

Zigbee 3.0 6 Gang Smart Switch
86*86*35.5mm

Button Panel Glacier Series





Max Load
2200W



100m
ZigBee Range



Easy
Installation

Button Panel Time Series



Max Load
2200W

100m
ZigBee Range

≤0.5W

Standby
Power







Model: CH-LITS1G

Zigbee 3.0 1 Gang Smart Switch
86*86*35.5mm



Model: CH-LITS2G

Zigbee 3.0 2 Gang Smart Switch
86*86*35.5mm



Model: CH-LITS3G

Zigbee 3.0 3 Gang Smart Switch
86*86*35.5mm



Model: CH-LITS4G

Zigbee 3.0 4Gang Smart Switch
86*86*35.5mm



Model: CH-LITS5G

Zigbee 3.0 5 Gang Smart Switch
86*86*35.5mm



Model: CH-LITS6G

Zigbee 3.0 6 Gang Smart Switch
86*86*35.5mm





Model: CH-LISW4G

Zigbee 3.0 4 Gang Smart Switch
86*86*35.5mm



Model: CH-LISW6G

Zigbee 3.0 6 Gang Smart Switch
86*86*35.5mm



Model: CH-LISW8G

Zigbee 3.0 8 Gang Smart Switch
86*86*35.5mm

Button Panel Swift Series



Various Colors

100m ZigBee Range

Easy Installation

Button Panel Virtuoso Series









Model: CH-LIVS1G

Zigbee 3.0 1 Gang Smart Switch
86*86*35.5mm



Model: CH-LIVS2G

Zigbee 3.0 2 Gang Smart Switch
86*86*35.5mm



Model: CH-LIVS3G

Zigbee 3.0 3 Gang Smart Switch
86*86*35.5mm



Model: CH-LIVS4G

Zigbee 3.0 4 Gang Smart Switch
86*86*35.5mm



Model: CH-LIVS6G

Zigbee 3.0 6 Gang Smart Switch
86*86*35.5mm







Model: CH-LIVA1G

Zigbee 3.0 1 Gang Smart Switch
86*86*26.6mm



Model: CH-LIVA2G

Zigbee 3.0 2 Gang Smart Switch
86*86*26.6mm



Model: CH-LIVA3G

Zigbee 3.0 3 Gang Smart Switch
86*86*26.6mm



Model: CH-LIVA4G

Zigbee 3.0 4 Gang Smart Switch
86*86*26.6mm



Model: CH-LIVA6G


Zigbee 3.0 6 Gang Smart Switch
86*86*26.6mm

Button Panel Viva Series





Ultra Slim
Design



100m
ZigBee Range



Easy
Installation





Model: CH-LIPBS2

KNX Push Button Sensor，2-gang
86x86x33mm



Model: CH-LIPBS3

KNX Push Button Sensor，3-gang
86x86x33mm



Model: CH-LIPBS4

KNX Push Button Sensor，4-gang
86x86x33mm

Button Panel Waltz Series



Switching &
Dimming



Recall &
Storage Scene



Built-in
Temperature

Wireless ZigBee 3.0
Panel Solution

Wireless ZigBee 3.0 Panel Solution

Touch Panel



LI310293
10.1-Inch Touch screen
259*161*13mm



CH-LIPS06
6-Inch Touch screen
184*88*10mm



CH-LIWS04
4-Inch Touch screen
86*86*10.5mm



CH-LIASTC
Large-screen Temperature Controller
86*86*35mm

Knob Panel



CH-LI00RB
DALI MCU Rotary Dimming
80*80*53mm



CH-LIKCSD
Metal Knob Color Screen Dimming
86*86*35mm



LI71200088
PC Knob Thermostat



LI71200116
PC Knob Thermostat

Wireless ZigBee 3.0 Panel Solution

Button Panel



CH-LIGS1G
1 Gang Smart Switch
86*86*35.5mm



CH-LIGS2G
2 Gang Smart Switch
86*86*35.5mm



CH-LIGS3G
3 Gang Smart Switch
86*86*35.5mm



CH-LIGS4G
4 Gang Smart Switch
86*86*35.5mm




CH-LIGS6G
6 Gang Smart Switch
86*86*35.5mm



CH-LIGS3F
3 Gang F type Smart Switch
86*86*35.5mm



CH-LIGS4P
4 Plaid Gang Smart Switch
86*86*35.5mm



CH-LIGS4S
4 Gang Smart Switch(Horizontal)
86*86*35.5mm



CH-LIGS6S
6 Gang Smart Switch(Horizontal)
86*86*35.5mm



CH-LITS1G
1 Gang Smart Switch
86*86*35.5mm



CH-LITS2G
2 Gang Smart Switch
86*86*35.5mm

Wireless ZigBee 3.0 Panel Solution



CH-LITS4G
4 Gang Smart Switch
86*86*35.5mm



CH-LITS5G
5 Gang Smart Switch
86*86*35.5mm



CH-LITS6G
6 Gang Smart Switch
86*86*35.5mm



CH-LISW4G
4 Gang Smart Switch
86*86*35.5mm



CH-LISW6G
6 Gang Smart Switch
86*86*35.5mm



CH-LISW8G
8 Gang Smart Switch
86*86*35.5mm



CH-LIVS1G
1 Gang Smart Switch
86*86*35.5mm



CH-LIVS2G
2 Gang Smart Switch
86*86*35.5mm



CH-LIVS3G
3 Gang Smart Switch
86*86*35.5mm



CH-LIVS4G
4 Gang Smart Switch
86*86*35.5mm



CH-LIVS5G
5 Gang Smart Switch
86*86*35.5mm



CH-LIVA1G
1 Gang Smart Switch
86*86*26.6mm



CH-LIVA2G
2 Gang Smart Switch
86*86*26.6mm



CH-LIVA3G
3 Gang Smart Switch
86*86*26.6mm



CH-LIVA4G
4 Gang Smart Switch
86*86*26.6mm



CH-LIVA6G
5 Gang Smart Switch
86*86*26.6mm

Zigbee Gateway



CH-LIZBGW
Zigbee Gateway
DC 5V/2A



LI71200085
Zigbee Wired Gateway
89*89*22mm

Controller



CH-LIZG5C
DIM CCT RGBW RGB+CCT 4 in 1 controller
DC 12-24V

Converter



CH-LIZD68
Zigbee to DALI DT6 & DT8 Controller
DC 12-24V

Relay



CH-LIZGHB
16A ZigBee In-wall relay
AC 100-240V

Driver



CH-LIZ1DL
NFC Dimmabble 12W LED Driver
6-42V, Max. 50V



CH-LIZ2ST
100W 24V Zigbee Dimmable Driver
DC 24V



CH-LIZG75
75W 24V Zigbee CCT Constant Voltage Driver
DC 24V

Smart DALI
Lighting Solution

Smart DALI Lighting Solution

Touch Panel



CH-LILCD1
DALI Central Control Screen-LCD4
86.5*86.5*40.7mm



CH-LIEUDT
DT8 DALI Dual Color Touch Controller
86*86*29.1mm

Button Panel



CH-LI8DA2
DALI 8-Button Panel
80*80*26.6mm



CH-LI4DA2
DALI 4-Button Panel
80*80*26.6mm



CH-LI2DA2
DALI 2-Button Panel
80*80*26.6mm

Smart DALI Lighting Solution

DALI Gateway



CH-LIDLGW
DALI EDA Gateway



LI615930
DALI-2 Master Controller



LI615931
DALI-2 TDA Gateway

Controller



CH-LIBRCP
DALI DT6 broadcast module



CH-LIRO5C
DALI DT8 LED Controller

Relay



CH-LI01SN
DALI Relay Module+ DALI
to 0/1-10V Converter

Driver



CH-LIDMSM
DALI DT8 Driver(Constant voltage)
75W



CH-LID2ST
DALI DT8 Driver(Constant voltage)
150W



CH-LIST10
DALI DT6 NFC Driver(Constant Current)
12W



CH-LIDT25
DALI DT6 NFC Driver(Constant Current)
25W



CH-LI150LC
DALI DT8 Driver(Constant voltage)
150W



CH-LI10LC
DALI DT8 Driver(Constant voltage)
100W



CH-LIMT48
DALI DT8 LED Controller
for Magnet Track Light

Sensor



CH-LIMWDT
Ceiling mounted Microwave
DALI sensor



CH-LIAPIR
Fixture Integrated DALI-2 PIR
DALI Sensor



LI615961
Ceiling mounted PIR + daylight sensor

Smart KNX
Automation Solution



Smart KNX Automation Solution

Touch Panel



CH-LIKSMTZ
KNX 10.1 Inch Touch Panel
240*186.8*8mm



CH-LIKSMT7
KNX 7 Inch Touch Panel
180*86*36 mm



CH-LISRWC
S7 Extension Sub Panel
Rotary with Camera（KNX 7 Inch Touch Panel)



CH-LISRW1
S7 Extension Sub Panel
Rotary（KNX 7 Inch Touch Panel)



CH-LISSP4
S7 Extension Sub Panel
4 buttons（KNX 7 Inch Touch Panel)



CH-LISESP
S7 Extension Sub Panel
4 buttons（KNX 7 Inch Touch Panel)



CH-LIKSMT3
KNX 3.3 Inch Touch Panel
86*86*35.6mm



CH-LIKSMTB
KNX Smart Touch with push button,3-gang
115*86*34.7mm

Button Panel



CH-LIPBS2
KNX Push Button Sensor，2-gang
86*86*33mm



CH-LIPBS3
KNX Push Button Sensor，3-gang
86*86*33mm



CH-LIPBS4
KNX Push Button Sensor，4-gang
86*86*33mm

Smart KNX Automation Solution

Sensor



CH-LIKNSM
KNX Presence Sensor
Microwave



CH-LIKMSP
KNX Motion Sensor
PIR



CH-LIKAQS
KNX Air Quality Sensor V2

Gateway



CH-LIKG1F
DALI Gateway
1 -Fold



CH-LIKG2F
KNX/DALI Gateway
2-Fold



CH-LIKGRS
KNX Gateway
for RS485/RS232



CH-LIZTZP
KNX Gateway
for Tuya ZigBee

System Equipment



CH-LIK640
KNX Power Supply
640mA



CH-LIKXLC
KNX Line Coupler



CH-LIKISC
KNX IP Interface
with Secure and Cloud



CH-LIKUSB
KNX TP-USB Interface

Actuator




CH-LISW4F
Switch Actuator
4-Fold



CH-LISW8F
Switch Actuator
8-Fold



CH-LIMA8F
Multifunction Actuator
8-Fold



CH-LIMA16
Multifunction Actuator
16-Fold



CH-LISA24
Shutter Actuator V2
4-Fold



CH-LI0104
1-10V DC Dimmer Controller
4-Fold



CH-LIUDA2
KNX Universal Dimming Actuator
2-Fold



CH-LIUDAF
KNX Universal Dimming
Actuator,Flush Mounted,1-Fold

Video Intercom



CH-LIVHOS
Outdoor Station
130*308*26.50 mm



CH-LIKMOS
Mini Outdoor Station
120*194*44.7mm




CH-LI7IIM
7 inch Indoor Monitor
182*119*15mm

Smart Lighting Products

Light is the soul of space, and smart lighting rewrites the rules of modern living. Our smart lighting product collection breaks the limits of traditional fixed illumination, integrating intelligent sensing, precise light control and multi-scene customization. It turns ordinary lighting into a flexible, responsive and personalized home experience, bringing effortless comfort, energy efficiency and immersive ambiance to every residential and commercial space.

- Villa
- Hotel
- Office
- Commercial Space

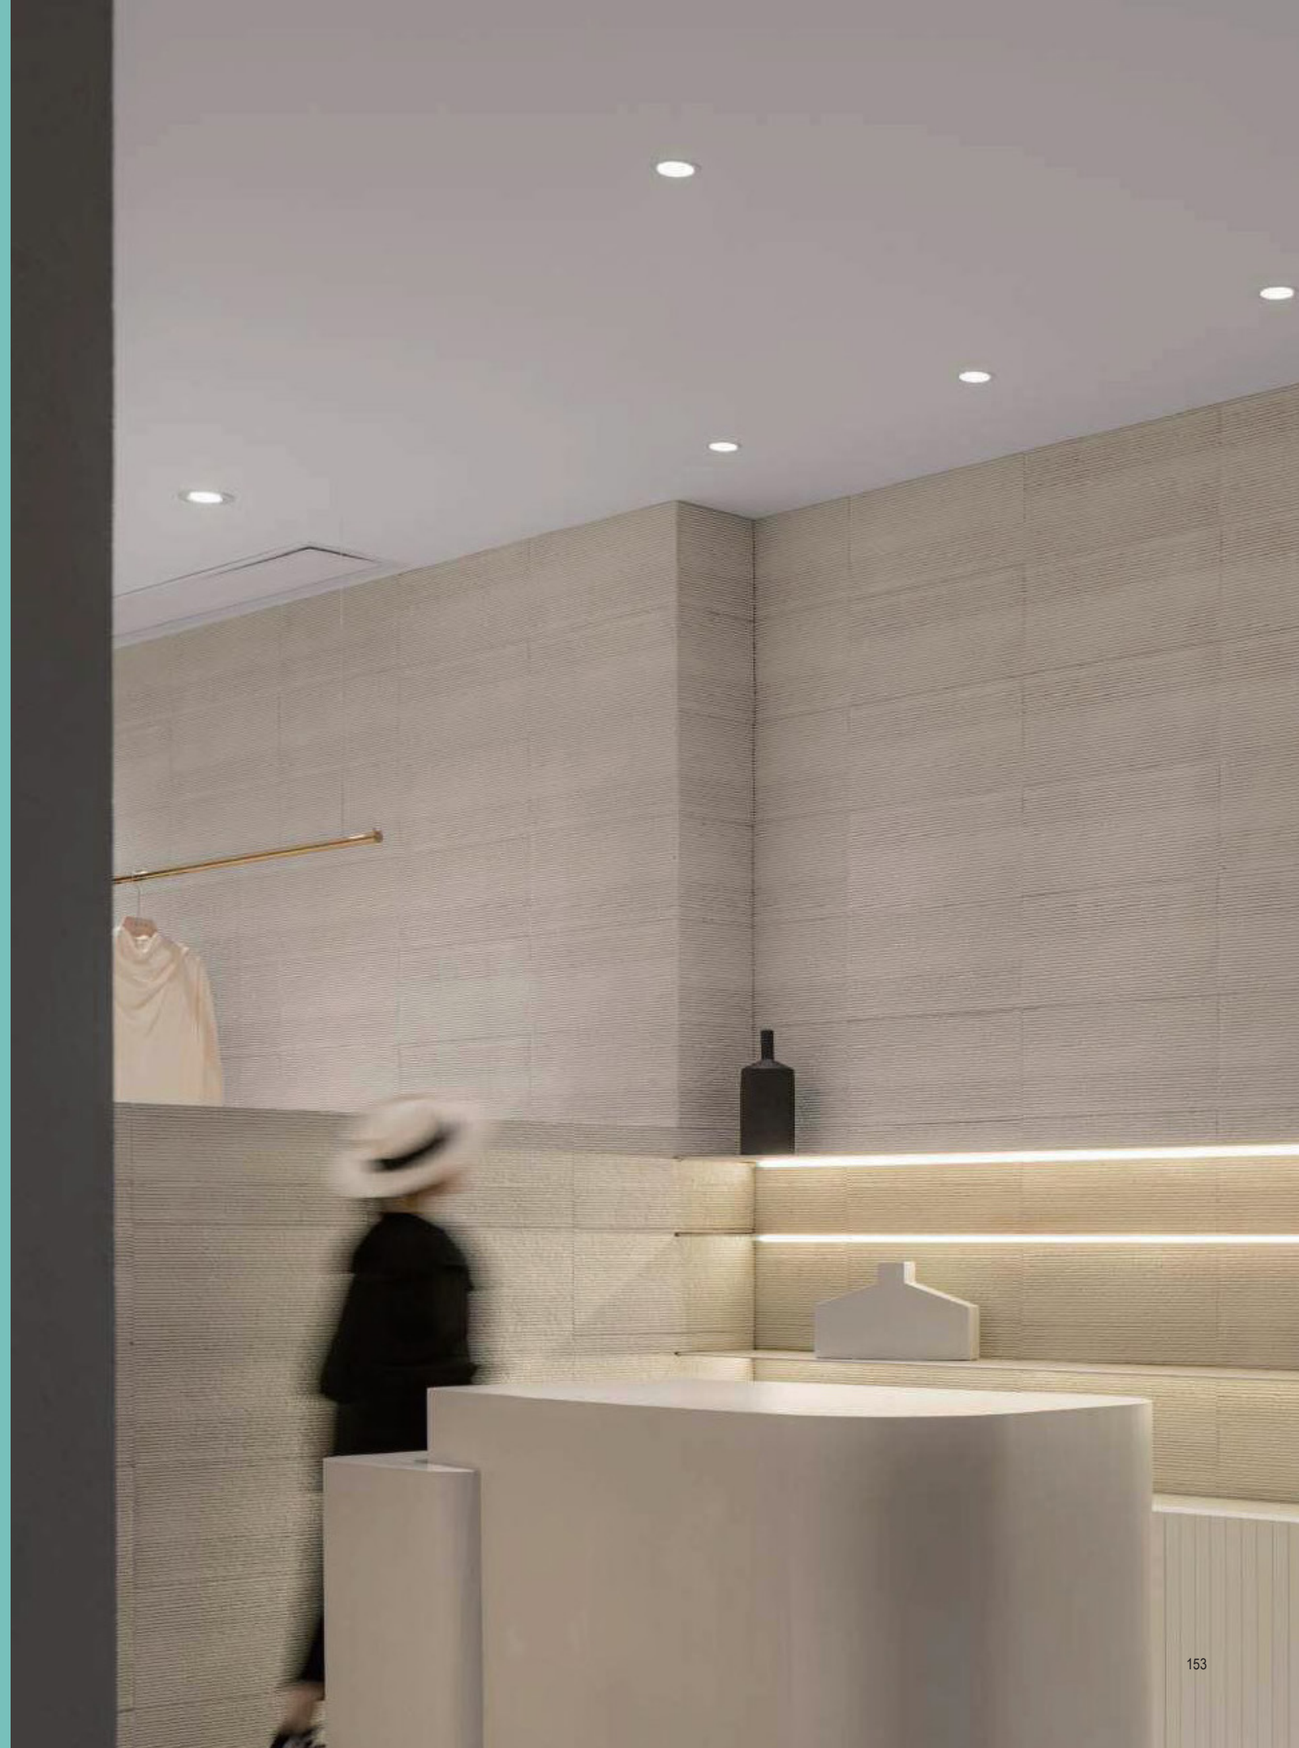

Dimmable Lights

Strip



LI611898

LED Neon Flex 9W/m -IP67 - DC 24V (One Roll= 5meters) -W6MM*H10MM



LI611905

LED Neon Flex 9W/m -IP67 - DC 24V (One Roll= 5meters) W8MM*H12MM



LI612499

LED Flexible Linear Light-10W/m - IP20 - DC 24V (One Roll= 5meters)



LI611862

LED Flexible Strip Linear Light - 10W/m - IP20 - DC 24V (One Roll= 5meters)



LI611869

LED Flexible Strip Linear Light - 10W/m - IP67 - DC 24V (One Roll= 5meters)



LI612500

LED Flexible Linear Light-10W/m - IP20 - DC 24V (One Roll= 5meters)



LI611894

LED Flexible Linear Light -10W/m - IP67 - DC 24V (One Roll= 5meters) RGBW



LI611861

LED Flexible Linear Light -10W/m - IP67 - DC 24V (One Roll= 5meters) RGBW



LI614429

LRS-200-48 Driver 200W (LED Magnetic Track Light)



LI614428

LRS-200-48 Driver 200W (LED Magnetic Track Light)




LI614427

LRS-100-48 Driver 100W (LED Magnetic Track Light)


Spotlight & Downlight TP Series

Model	LI-100301E55-60
Dimension	65x75mm
Cut out	Φ55-60mm
Power	6W
Beam angles	10°/15°/24°/38°
Materia	Aluminum
CRI	≥80/≥90
CCT	2700K/3000K/4000K/5000K

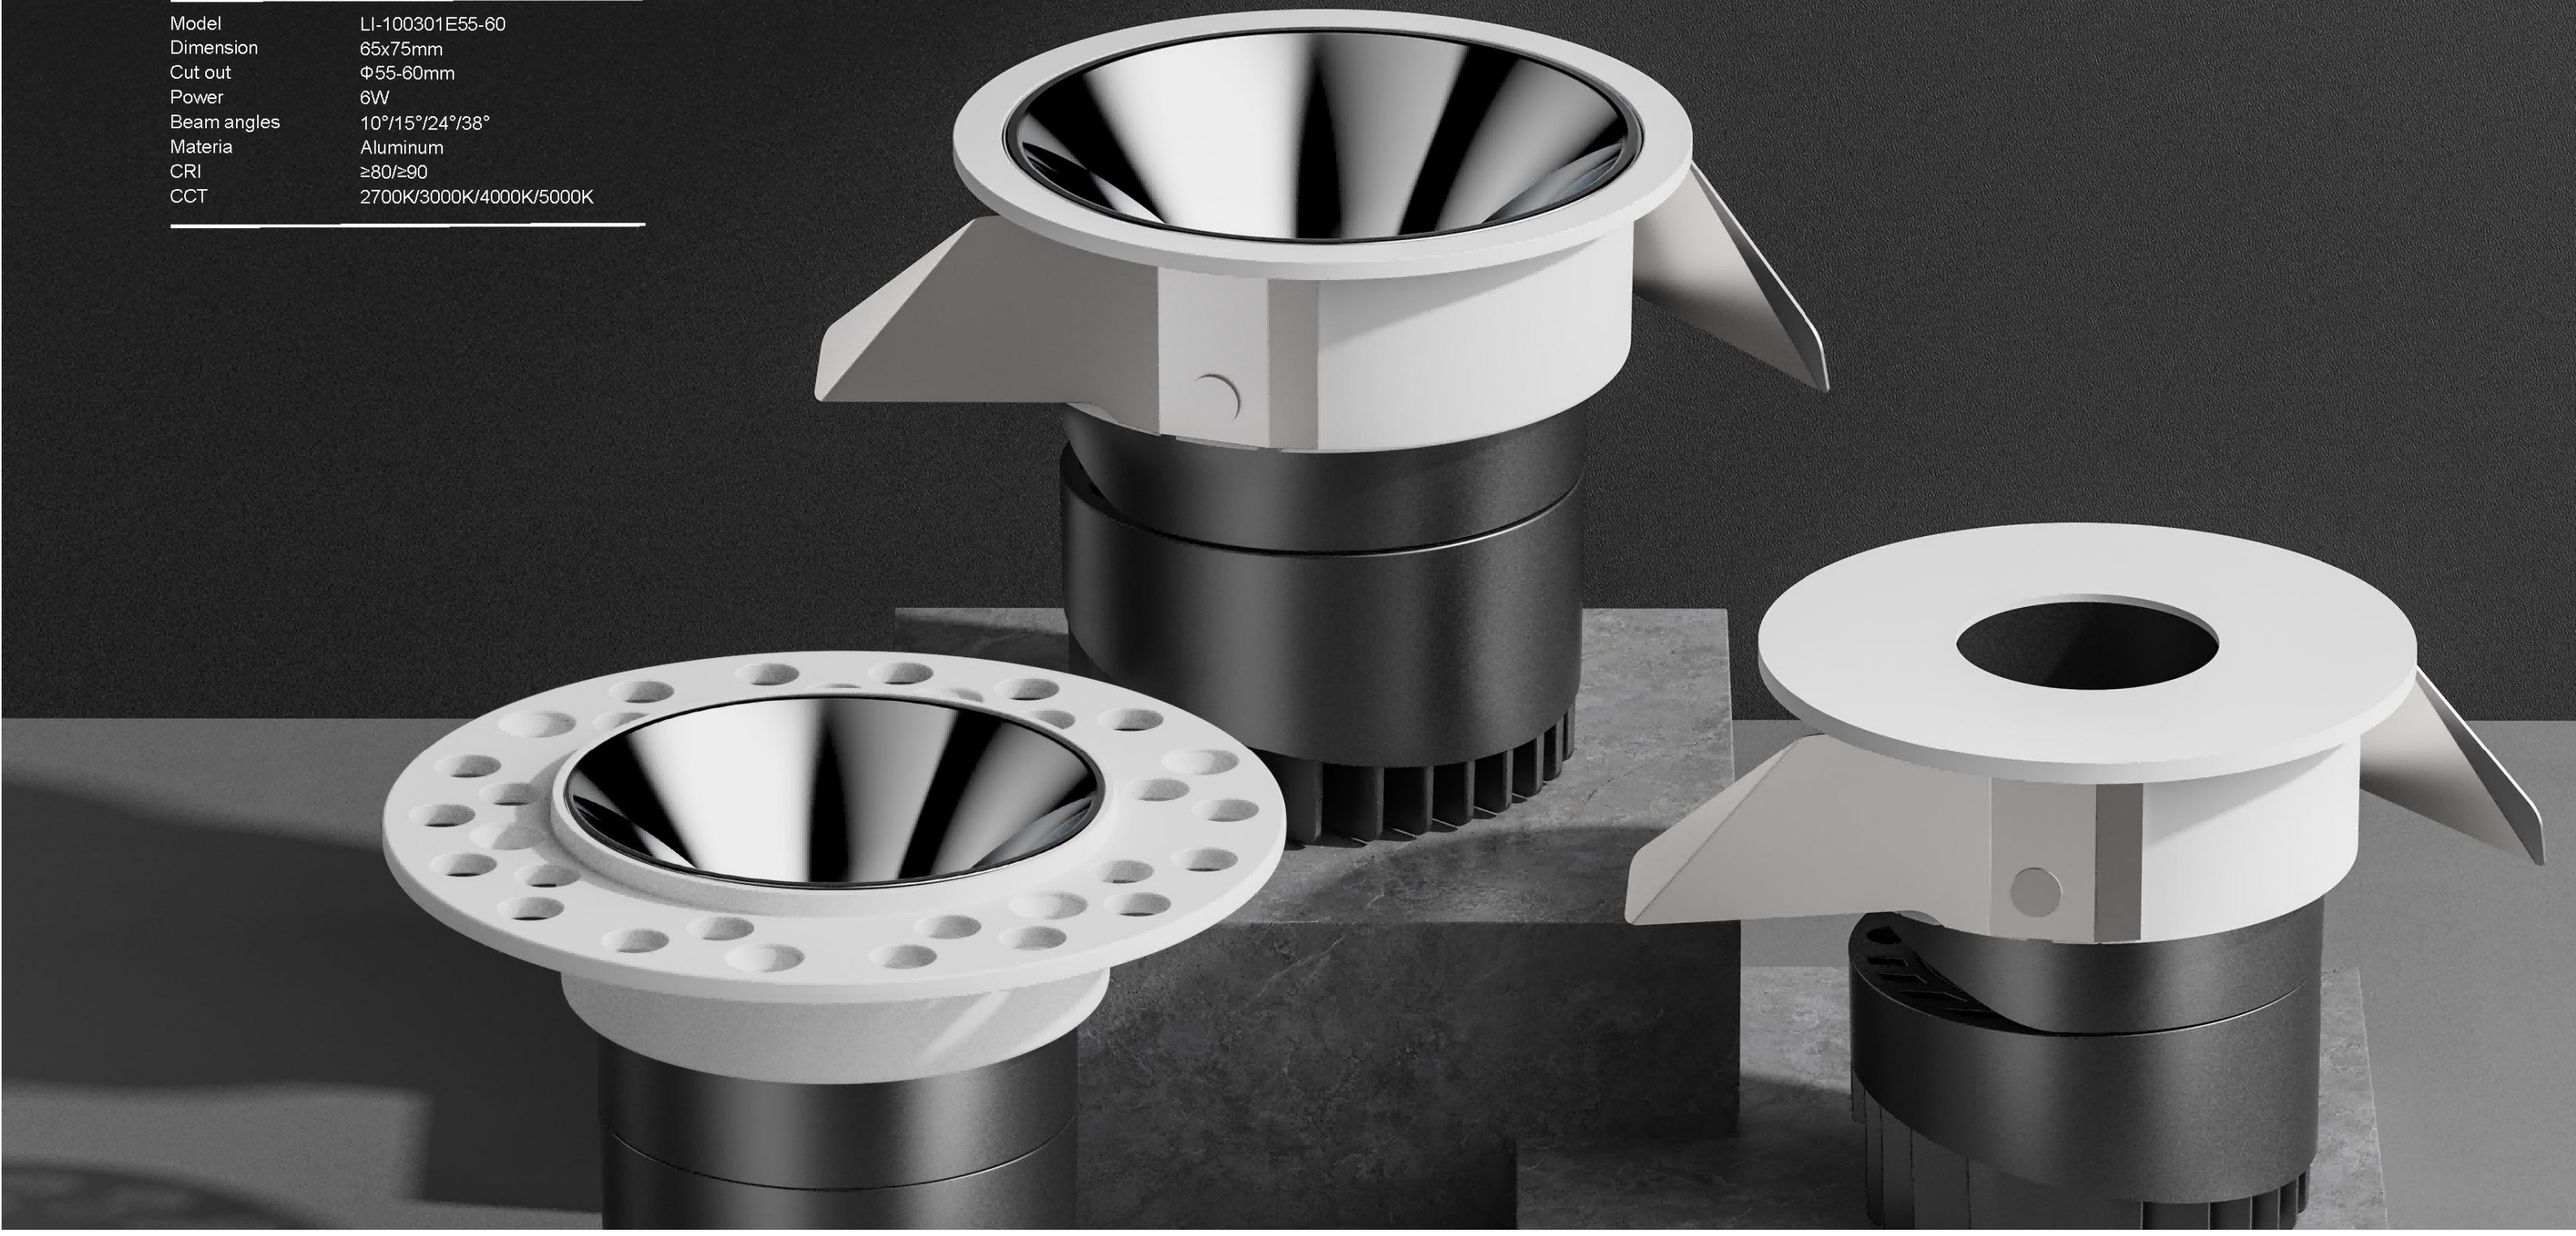


Radiator simulation

Die-casting aluminum heat dissipation structure, the heat is derived from the inner hole of the heatsink, and when the air flow rises from the inner hole, the heat is exported with the air.

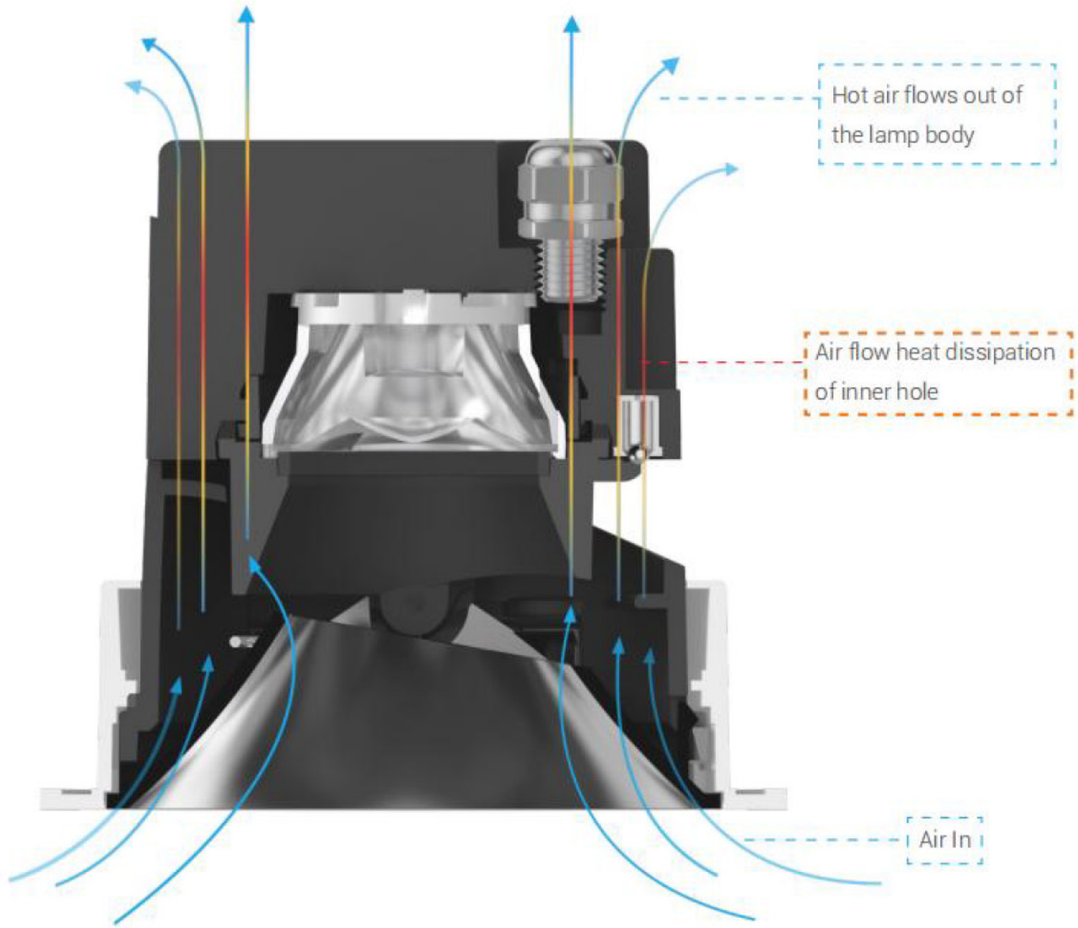

0~30°

Stepless regulation 0~30°at any angle

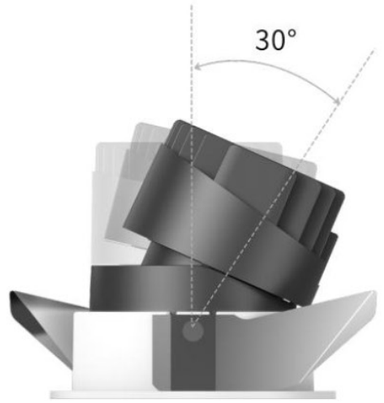


Horizontal rotation of 355°

Horizontal rotation of 355 °, with positioning point, damping to Fool-proof and prevent winding.



Easy Installation

A variety of springs are available for quick installation, suitable for various ceiling thicknesses

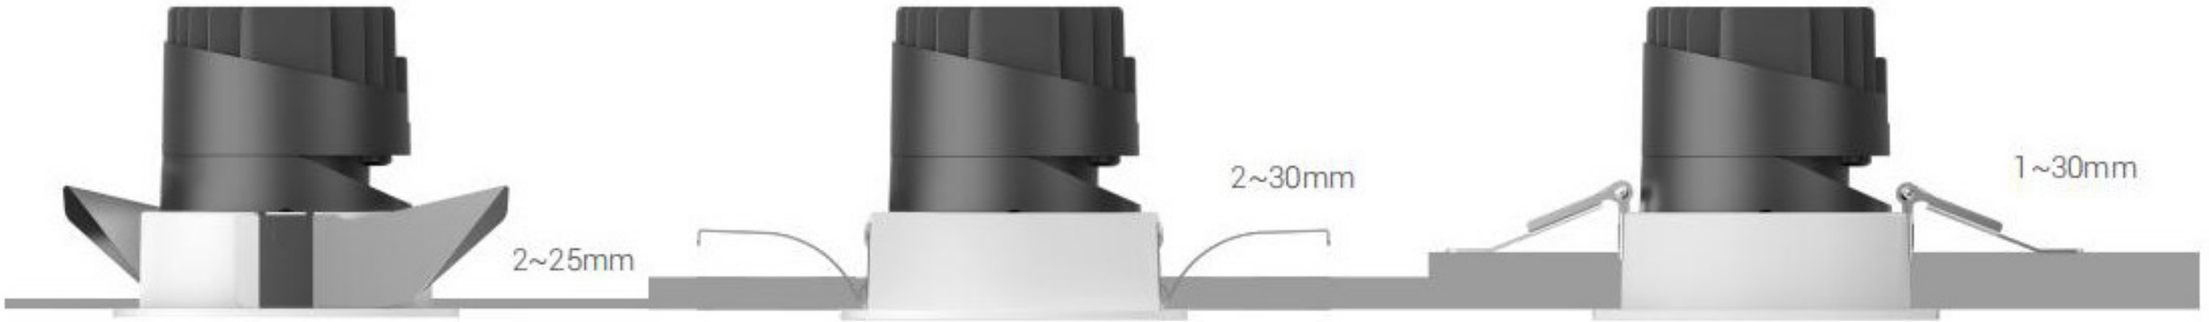

Knife shrapnel

Bending spring piece

Spring clips

TP Series Specification



LI-1002E45



LI-1002E55



LI-1002E65




LI-1002E75





LI-1002E95





LI-1002E120














Model	LI-1002E45	LI-1002E55	LI-1002E65	LI-1002E75	LI-1002E95	LI-1002E120
power	8W	8W	10W	12W	20W	36W
CRI	≥90	≥90	≥90	≥90	≥90	≥90
Dimension	52x55mm	65x61mm	75x70mm	80x85mm	106x100mm	135x124mm
Cut out	45mm	55mm	65mm	75mm	95mm	120mm
Beam angles	15°/24°/36°	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
CCT	3000K/4000K/5000K 2700-6000K	3000K/4000K/5000K 2700-6000K	3000K/4000K/5000K 2700-6000K	3000K/4000K/5000K 2700-6000K	3000K/4000K/5000K 2700-6000K	3000K/4000K/5000K 2700-6000K
UGR	<19	<19	<19	<19	<19	<19
IP rating	IP20	IP20	IP20	IP20	IP20	IP20
Lifespan	50000 h	50000 h	50000 h	50000 h	50000 h	50000 h



TP Series Specification



LI-100301E55-60




LI-100302E55-60




LI-100303E55-60



LI-100304E55-60






Model	LI-100301E55-60	LI-100302E55-60	LI-100303E55-60	LI-100304E55-60
Power	6W	6W	6W	6W
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Dimension	65x75mm	65x78mm	65x75mm	65x78mm
Cut out	Φ55-60mm	Φ55-60mm	Φ55-60mm	Φ55-60mm
Beam angles	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°
Material	Aluminum	Aluminum	Aluminum	Aluminum
CCT	2700K/3000K/4000K/ 5000K	2700K/3000K/4000K/ 5000K	2700K/3000K/4000K/ 5000K	2700K/3000K/4000K/ 5000K
UGR	<19	<19	<19	<19
IP rating	IP20	IP20	IP20	IP20
Lifespan	50000 h	50000 h	50000 h	50000 h

TP Series Specification

Model	LI-100301E75	LI-100302E75	LI-100303E75	LI-100304E75	LI-100305E75
Power	12W	12W	12W	12W	12W
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Dimension	Φ85x105mm	Φ85x116mm	Φ85x105mm	Φ85x116mm	Φ85x116mm
Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm	Φ75mm
Beam angles	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
CCT	2700K/3000K/ 4000K/5000K	2700K/3000K/ 4000K/5000K	2700K/3000K/ 4000K/5000K	2700K/3000K/ 4000K/5000K	2700K/3000K/ 4000K/5000K
UGR	<19	<19	<19	<19	<19
IP rating	IP20	IP20	IP20	IP20	IP20
Lifespan	50000 h	50000 h	50000 h	50000 h	50000 h



LI-100301E75



LI-100302E75




LI-100303E75




LI-100304E75



LI-100305E75







LI-100301E55
8W Φ55mm
Φ63x76mm
15°/24°/36°/55°



LI-100302E55
8W Φ55mm
Φ63x78mm
15°/24°/36°/55°



LI-100303E55
8W Φ55mm
Φ63x76mm
15°/24°/36°/55°



LI-100301E65
10W Φ65mm
Φ72.5x81mm
10°/15°/ 24°/ 36°/55°



LI-100302E65
10W Φ65mm
Φ72.5x83mm
10°/15°/ 24°/ 36°/55°



LI-100303E65
10W Φ65mm
Φ72.5x81mm
10°/15°/ 24°/ 36°/55°



LI-100301E95
20W Φ95mm
Φ106x119mm
15°/ 24°/ 38°



LI--100302E95
20W Φ95mm
Φ106x126mm
15°/ 24°/ 38°



LI--100303E95
20W Φ95mm
Φ106x119mm
15°/ 24°/ 38°



LI--100304E95
20W Φ95mm
Φ106x126mm
15°/ 24°/ 38°



LI--100305E95
20W Φ95mm
Φ106x126mm
15°/ 24°/ 38°



LI--100301E95-LENS
23W Φ95mm
Φ106x116mm
15°/ 24°/ 38°/ 60°



LI-100302E95-LENS
23W Φ95mm
Φ106x123mm
15°/ 24°/ 38°/ 60°



LI--100303E95-LENS
23W Φ95mm
Φ106x116mm
15°/ 24°/ 38°/ 60°



LI-100304E95-LENS
23W Φ95mm
Φ106x123mm
15°/ 24°/ 38°/ 60°



LI-100305E95-LENS
23W Φ95mm
Φ106x123mm
15°/ 24°/ 38°/ 60°



LI-100301E120
30W Φ120mm
Φ132x145mm
15°/ 24°/ 38°



LI--100302E120
30W Φ120mm
Φ132x155mm
15°/ 24°/ 38°



LI-100305E120
30W Φ120mm
Φ132x155mm
15°/ 24°/ 38°



LI--100301T75
12W Φ75mm
134x104mm
15°/24°/38°



LI-100302T75
12W Φ75mm
134x109mm
15°/24°/38°



LI-100303T75
12W Φ75mm
134x104mm
15°/24°/38°



LI-100304T75
12W Φ75mm
134x109mm
15°/24°/38°



LI--100305E75
12W Φ75mm
86x109mm
15°/24°/38°



LI-100301T75-LENS
12W Φ75mm
134x94mm
10°/15°/24°/38°/55°



LI-100302T75-LENS
12W Φ75mm
134x99mm
10°/15°/24°/38°/55°



LI-100303T75-LENS
12W Φ75mm
134x94mm
10°/15°/24°/38°/55°



LI-100304T75-LENS
12W Φ75mm
134x99mm
10°/15°/24°/38°/55°



LI-100305T75-LENS
12W Φ75mm
134x99mm
10°/15°/24°/38°/55°

TP Series Specification

Reflector cover:





LI-1005E35



LI-1005E45



LI-1005E55



LI-1002E65




LI-1002E75





LI-1002E95





LI-1002E120


















Model	LI-1005E35	LI-1005E45	LI-1005E55	LI-1005E65	LI-1005E75	LI-1005E95	LI-1005E120
power	6W	7W	8W	10W	12W	15W/25W	35W
CRI	≥90	≥90	≥90	≥90	≥90	≥90	≥90
Dimension	40x85mm	52x72mm	62x77mm	73x80mm	84x85mm	103x110mm	130x135mm
Cut out	35mm	45mm	55mm	65mm	75mm	95mm	120mm
Beam angles	15°/24°/36°/50°						
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
CCT	3000K/4000K/5000K 2700-6000K						
UGR	<19	<19	<19	<19	<19	<19	<19
IP rating	IP54						
Adjustable	30°	30°	30°	30°	30°	30°	30°
Lifespan	50000 h	50000 h	50000 h	50000 h	50000 h	50000 h	50000 h

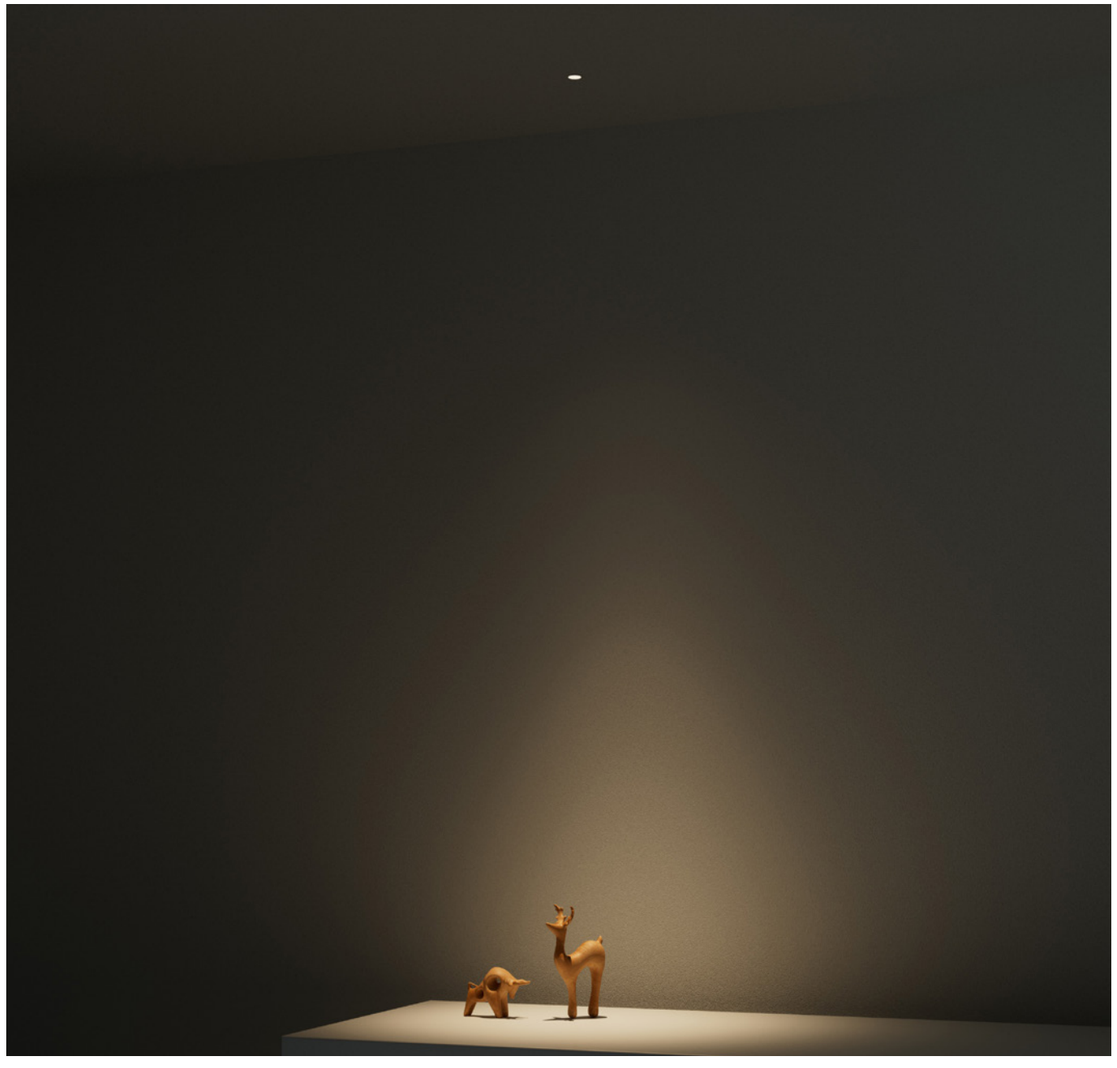

TP Series Specification

Reflector cover:






LI-100902E55



LI-100902P55




LI-100902PT55




LI-100902YT55



LI-100902E75



LI-100902P75



LI-100902PT75




LI-100902T75





LI-100902E95



LI-100902T95







Model	LI-100902E55	LI-100902YT55	LI-100902P55	LI-100902PT55	LI-1005E75	LI-1005E95	LI-1005E120
power	8W	8W	8W	8W	12W	15W/25W	35W
CRI	≥90	≥90	≥90	≥90	≥90	≥90	≥90
Dimension	62x85mm	85x85mm	68x68x86.5mm	130x60x86.5mm	84x85mm	103x110mm	130x135mm
Cut out	55mm	55mm	60x60mm	65x65mm	75mm	95mm	120mm
Beam angles	15°/24°/36°/50°						
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
CCT	3000K/4000K/5000K 2700-6000K						
UGR	<19	<19	<19	<19	<19	<19	<19
IP rating	IP20						
Adjustable	30°	30°	30°	30°	30°	30°	30°
Lifespan	50000 h	50000 h	50000 h	50000 h	50000 h	50000 h	50000 h

Model	LI-100902E75	LI-100902T75	LI-100902P75	LI-100902PT75
power	12W	12W	12W	12W
CRI	≥90	≥90	≥90	≥90
Dimension	82x85mm	108x85mm	85x85x86.5mm	129x75x86.5mm
Cut out	75mm	75mm	75x75mm	75x75mm
Beam angles	15°/24°/36°/50°			
Material	Aluminum	Aluminum	Aluminum	Aluminum
CCT	3000K/4000K/5000K 2700-6000K			
UGR	<19	<19	<19	<19
IP rating	IP20			
Adjustable	30°	30°	30°	30°
Lifespan	50000 h	50000 h	50000 h	50000 h

Model	LI-100902E95	LI-100902T95
power	25W	25W
CRI	≥90	≥90
Dimension	105x115mm	128x115mm
Cut out	95mm	95mm
Beam angles	15°/24°/36°/50°	
Material	Aluminum	Aluminum
CCT	3000K/4000K/5000K 2700-6000K	
UGR	<19	<19
IP rating	IP20	
Adjustable	30°	30°
Lifespan	50000 h	50000 h



Magnetic Track Light



LI-CX-20GD7
7W
Φ40*70mm



LI-BL30WT
30W
65*118mm



LI-CD-DX7W-TJ
7W
ϕ40*H300mm



LI-CX-20ZD12
12W
L226*W22.5*H107.5mm



LI-CX-20XZD12
12W
L225*W22*H25mm



LI-CX-20JG12
12W
L220*W22*H25mm



LI-CX-20ZDF12
12W
L220*W22*H110mm



LI-CX-20FG300
12W
L300*W22*H25mm

Accessory



20Built-in power supply
Wattage:48V 200W



20Built-in power supply
Wattage:48V 100W



I connector



L connector



input power connector



tee



concave corner



Horizontal corner



R20-B concealed plywood
anti-cracking 4-wire
magnetic track



R20-B concealed plywood
4-wire magnetic track strip
Thickness: 1.7mm/2.0mm



S20 surface mounted
4-wire magnetic track strip
Thickness: 1.5mm/2.0mm



R20-A concealed gray
4-wire magnetic track strip
Thickness: 1.5mm/2.0mm



Track comector

Scent Diffuser

Enhance your air quality and fill your space with soothing aromas, all with intelligent control at your fingertips.
Turn every breath into a refreshing escape and create a haven of relaxation and wellness.

Hotel

Villa

Office

Lobby



Enhance Air Quality



Smart Control by Mobile

Hypnotek app control meets different demands.





Smart Control by Mobile

Hypnotek app control meets different demands.



Oil Level Notification

Get notification when fragrance oil remaining 15%.

Large Coverage

Capacity: 1500ml Scent Coverage: 4000m³



Hotel

Luxurious fragrances that warmly welcome and captivate every guest.






Villa

Elevate your villa with bespoke fragrances, creating a serene and inviting atmosphere for every corner of your home.

Office

Enhance your office with sophisticated fragrances that inspire focus,boost productivity, and leave a lasting impression.

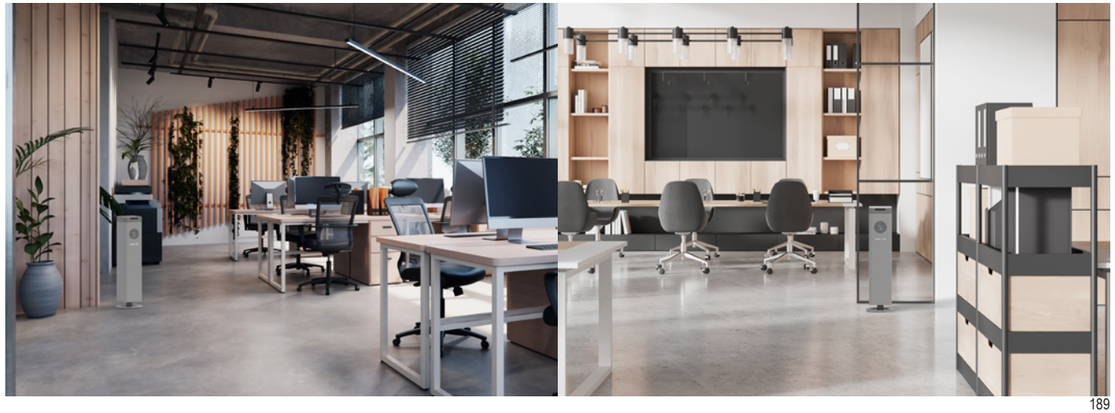



Code No. LI71202030

Colors	Titanium
Material	Aluminum + Plastic
Voltage	DC12V
Power	15W
Noise	<45dba
Capacity	15OOml
Weight	5.8Kg
Scent coverage	4000m³
Control	Touch key display/App
Install	Floor
Notifications	Fragrance oil remaining 15%





Macau

Top notes: White Lemon, Lime, Neroli
Middle notes: Cypress, English Lavender, Jasmine
Base notes: White Musk, White Amber, Flat Fruit Wood



Haarlam

Top notes: Orange, Grapefruit, Bergamot
Middle notes: Neroli, Frankincense, Cardamom
Base notes: Sadge,Sandalwood, Musk



Beirut

Top notes: Ambergris
Middle notes: Lily of the valley
Base notes: Cedar, Musk, Amber



Riyadh

Top notes: Rose
Middle notes: Pepper, Cardamom, Coriander
Base notes: Musk, Woody, Jasmine, Amber

Wide Range for Fragrance











Code No. LI71200719

Colors	White
Material	ABS
Voltage	220-240V
Coverage Area	90m^2
Power	90W
Noise	<69dba
Weight	10.9kg
Dimension	479*269*717mm
Air Flow	CDAR 600m^3/H

illus
ILLUMINATION

Contact Us
global@illuslighting.com
www.illuslighting.com
Find us in KSA, UAE, Oman, Kuwait, Qatar, Egypt, Spain, Bahrain, China.