

LED TRACK LIGHT

2025 Brochure

CONTENTS

Srio Series S203

Ultra Series S25

ETSlim Series S16

NA Series S5

TP10 Series

TP15 Series

TP204 Series

HV34 Series

**LED MAGNETIC
TRACK LIGHT**

Srio Series S203


48V | 20MM

Beyond Light, To the Last Details..



Magnetic Design

Offer flexibility, easy installation, customizable setups, and sleek aesthetics, all crafted from durable aluminum, making it ideal for dynamic and modern spaces.

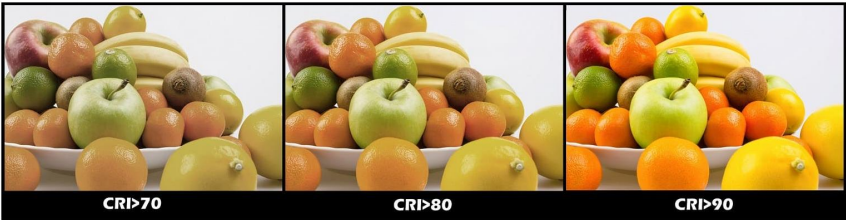


The LED Magnetic Track Light with a high CRI of 90 ensures accurate color rendering, vibrant visuals, and enhanced lighting quality for professional and aesthetic spaces.

CRI > 90


Track Types: Multiple Installations



Embedded with Gypsum

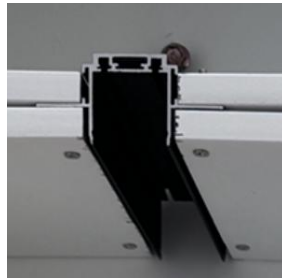

Embedded with Ceiling Board

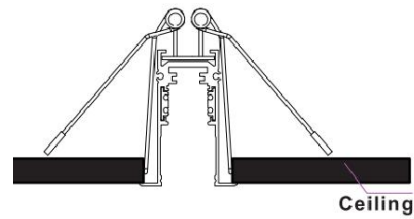

Embedded with Ceiling Board




Suspension




Soft film ceiling track




Track Series

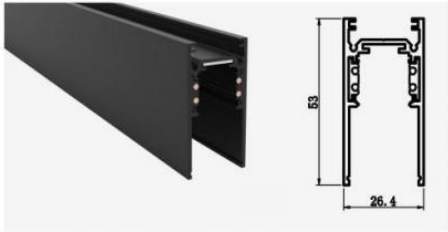


Size:26.4X78.4X26.4mm

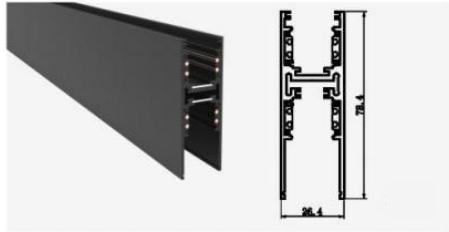


Size:26.4X78.4X26.4mm

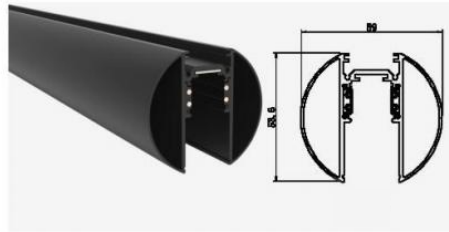


Size:59X53.6X59mm

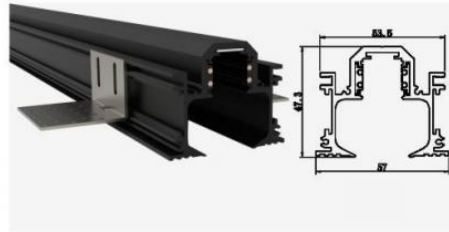


Size:53.5X47.3X57mm

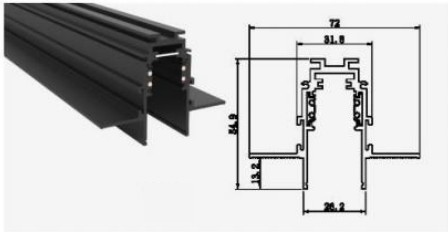


Size:72X54.9X26.3mm

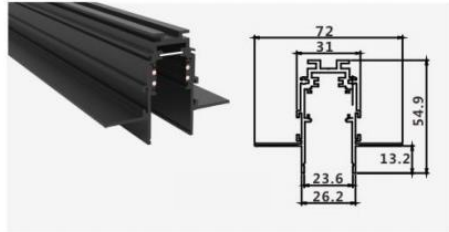


Size:31X53X72mm

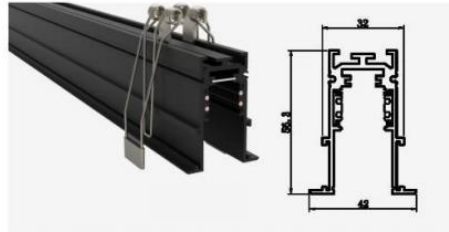


Size:32X56.3X42mm

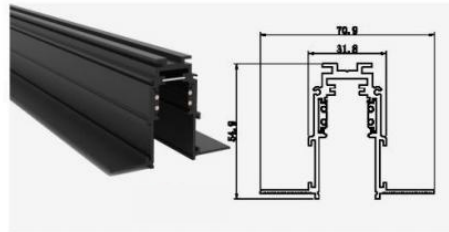


Size:70.9X54.9X31.8mm

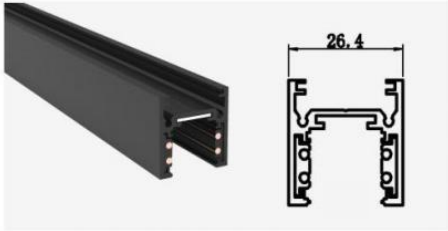


Size:26.4X26.4X26.4mm

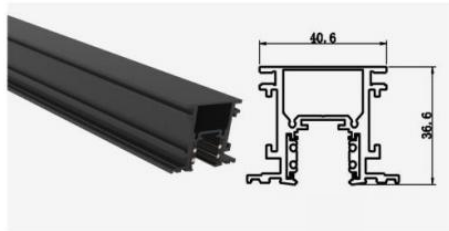


Size:40.6X36.6X48.8mm

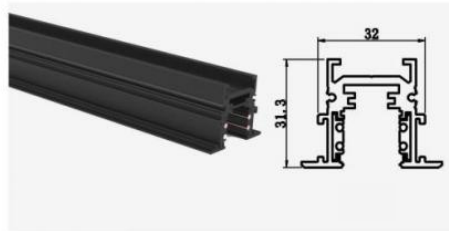

Size:31.3X32X42mm

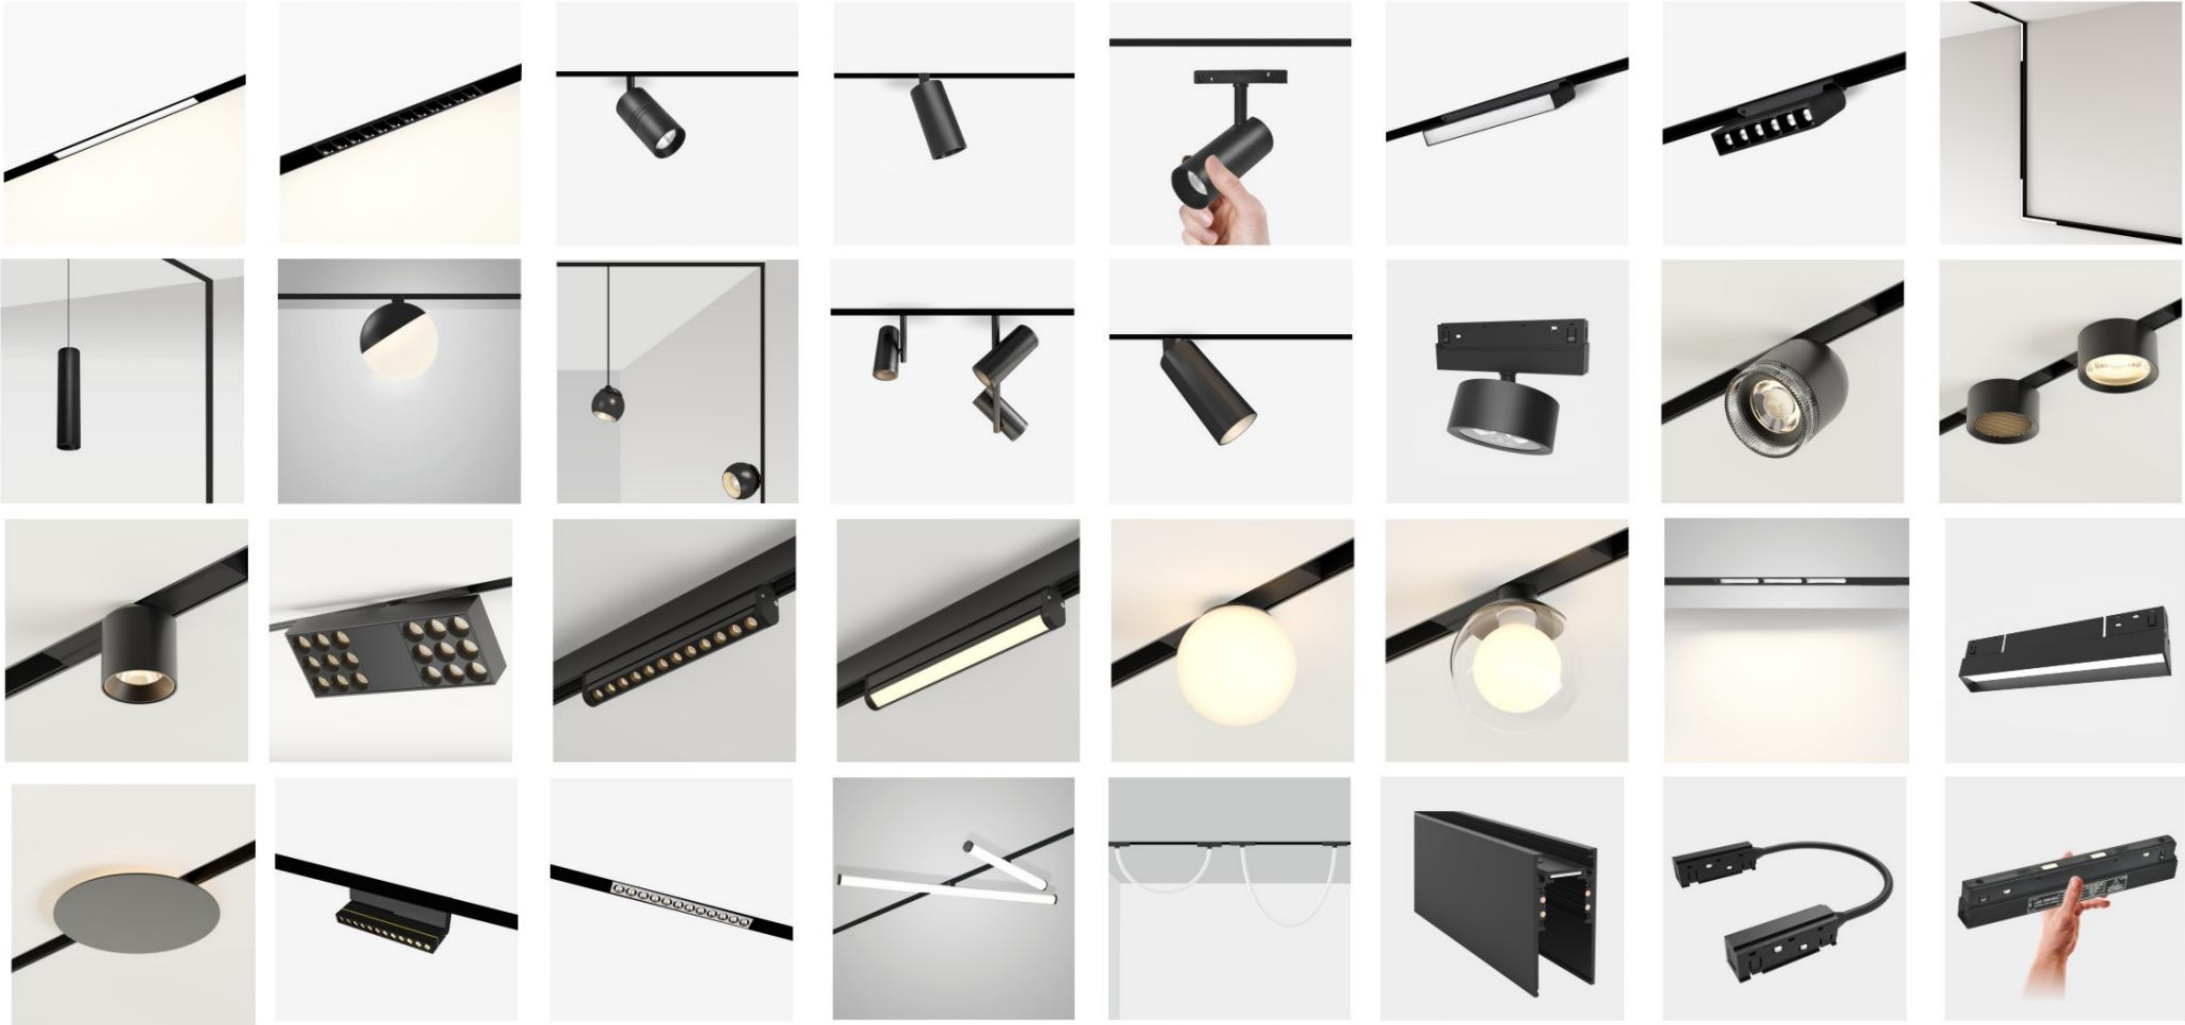

LED Track Flood Light

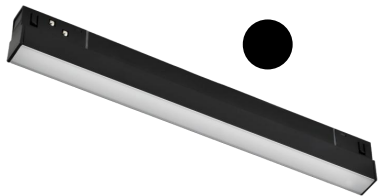

CRI

> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT100	Aluminum	48V	10W	3000K	90°	L305*W22*H43mm
LI-MT101	Aluminum	48V	10W	4000K	90°	L305*W22*H43mm
LI-MT102	Aluminum	48V	10W	5000K	90°	L305*W22*H43mm
LI-MT104	Aluminum	48V	20W	3000K	90°	L605*W22*H43mm
LI-MT005	Aluminum	48V	20W	4000K	90°	L605*W22*H43mm
LI-MT105	Aluminum	48V	20W	5000K	90°	L605*W22*H43mm
LI-MT002	Aluminum	48V	30W	3000K	90°	L905*W22*H43mm
LI-MT006	Aluminum	48V	30W	4000K	90°	L905*W22*H43mm
LI-MT106	Aluminum	48V	30W	5000K	90°	L905*W22*H43mm
LI-MT107	Aluminum	48V	40W	3000K	90°	L1205*W22*H43mm
LI-MT108	Aluminum	48V	40W	4000K	90°	L1205*W22*H43mm
LI-MT109	Aluminum	48V	40W	5000K	90°	L1205*W22*H43mm

CRI > 90

IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT129	Aluminum	48V	20W	3000K	90°	L322*W307*H43mm
LI-MT014	Aluminum	48V	20W	4000K	90°	L322*W307*H43mm
LI-MT130	Aluminum	48V	20W	5000K	90°	L322*W307*H43mm
LI-MT131	Aluminum	48V	20W	3000K	90°	L322*W307*H43mm
LI-MT015	Aluminum	48V	20W	4000K	90°	L322*W307*H43mm
LI-MT132	Aluminum	48V	20W	5000K	90°	L322*W307*H43mm

LED Track Flood Light



90° INNER



90° OUTER

LED Adjustable Folding Track Flood Light



> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT138	Aluminum	48V	6W	3000K	100°	L134*W22*H106mm
LI-MT139	Aluminum	48V	6W	4000K	100°	L134*W22*H106mm
LI-MT140	Aluminum	48V	6W	5000K	100°	L134*W22*H106mm
LI-MT141	Aluminum	48V	12W	3000K	100°	L220*W22*H106mm
LI-MT011	Aluminum	48V	12W	4000K	100°	L220*W22*H106mm
LI-MT142	Aluminum	48V	12W	5000K	100°	L220*W22*H106mm

CRI > 90

IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT289	Aluminum	48V	6W	3000K	90°	L114.5*W25*H88mm
LI-MT290	Aluminum	48V	6W	4000K	90°	L114.5*W25*H88mm
LI-MT291	Aluminum	48V	6W	5000K	90°	L114.5*W25*H88mm
LI-MT292	Aluminum	48V	12W	3000K	90°	L222.3*W25*H85mm
LI-MT293	Aluminum	48V	12W	4000K	90°	L222.3*W25*H85mm
LI-MT294	Aluminum	48V	12W	5000K	90°	L222.3*W25*H85mm
LI-MT295	Aluminum	48V	18W	3000K	90°	L330.3*W25*H85mm
LI-MT296	Aluminum	48V	18W	4000K	90°	L330.3*W25*H85mm
LI-MT297	Aluminum	48V	18W	5000K	90°	L330.3*W25*H85mm

LED Track Adjustable Flood Light



LED Track Polarized Light



> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT118	Aluminum	48V	6W	3000K	Polarized Light	L127*W22*H43mm
LI-MT119	Aluminum	48V	6W	4000K	Polarized Light	L127*W22*H43mm
LI-MT120	Aluminum	48V	6W	5000K	Polarized Light	L127*W22*H43mm
LI-MT121	Aluminum	48V	12W	3000K	Polarized Light	L220*W22*H43mm
LI-MT122	Aluminum	48V	12W	4000K	Polarized Light	L220*W22*H43mm
LI-MT123	Aluminum	48V	12W	5000K	Polarized Light	L220*W22*H43mm
LI-MT124	Aluminum	48V	18W	3000K	Polarized Light	L328*W22*H43mm
LI-MT013	Aluminum	48V	18W	4000K	Polarized Light	L328*W22*H43mm
LI-MT125	Aluminum	48V	18W	5000K	Polarized Light	L328*W22*H43mm
LI-MT126	Aluminum	48V	24W	3000K	Polarized Light	L436*W22*H43mm
LI-MT127	Aluminum	48V	24W	4000K	Polarized Light	L436*W22*H43mm
LI-MT128	Aluminum	48V	24W	5000K	Polarized Light	L436*W22*H43mm


CRI > 90

IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT110	Aluminum	48V	6W	3000K	24°	L134*W22*H43mm
LI-MT111	Aluminum	48V	6W	4000K	24°	L134*W22*H43mm
LI-MT090	Aluminum	48V	6W	5000K	24°	L134*W22*H43mm
LI-MT112	Aluminum	48V	12W	3000K	24°	L220*W22*H43mm
LI-MT009	Aluminum	48V	12W	4000K	24°	L220*W22*H43mm
LI-MT113	Aluminum	48V	12W	5000K	24°	L220*W22*H43mm
LI-MT114	Aluminum	48V	18W	3000K	24°	L328*W22*H43mm
LI-MT012	Aluminum	48V	18W	4000K	24°	L328*W22*H43mm
LI-MT115	Aluminum	48V	18W	5000K	24°	L328*W22*H43mm
LI-MT116	Aluminum	48V	24W	3000K	24°	L436*W22*H43mm
LI-MT003	Aluminum	48V	24W	4000K	24°	L436*W22*H43mm
LI-MT117	Aluminum	48V	24W	5000K	24°	L436*W22*H43mm

LED Track Grille Light

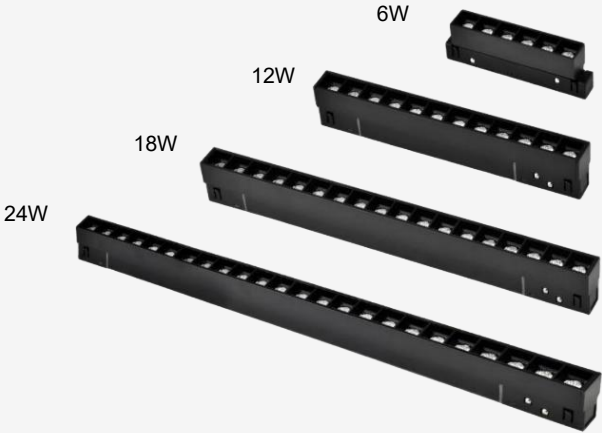

LED Adjustable Track Grille Light



> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT298	Aluminum	48V	6W	3000K	24°/36°	L114.5*W25*H88mm
LI-MT299	Aluminum	48V	6W	4000K	24°/36°	L114.5*W25*H88mm
LI-MT300	Aluminum	48V	6W	5000K	24°/36°	L114.5*W25*H88mm
LI-MT301	Aluminum	48V	12W	3000K	24°/36°	L222.3*W25*H85mm
LI-MT302	Aluminum	48V	12W	4000K	24°/36°	L222.3*W25*H85mm
LI-MT303	Aluminum	48V	12W	5000K	24°/36°	L222.3*W25*H85mm
LI-MT304	Aluminum	48V	18W	3000K	24°/36°	L330.3*W25*H85mm
LI-MT305	Aluminum	48V	18W	4000K	24°/36°	L330.3*W25*H85mm
LI-MT306	Aluminum	48V	18W	5000K	24°/36°	L330.3*W25*H85mm



> 90



IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT133	Aluminum	48V	6W	3000K	24°/36°	L134*W22*H106mm
LI-MT134	Aluminum	48V	6W	4000K	24°/36°	L134*W22*H106mm
LI-MT135	Aluminum	48V	6W	5000K	24°/36°	L134*W22*H106mm
LI-MT136	Aluminum	48V	12W	3000K	24°/36°	L220*W22*H106mm
LI-MT010	Aluminum	48V	12W	4000K	24°/36°	L220*W22*H106mm
LI-MT137	Aluminum	48V	12W	5000K	24°/36°	L220*W22*H106mm

LED Adjustable Track Grille Light



LED Adjustable Track Grille Light



> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT307	Aluminum	48V	6W	3000K	60°	L114.5*W25*H88mm
LI-MT308	Aluminum	48V	6W	4000K	60°	L114.5*W25*H88mm
LI-MT309	Aluminum	48V	6W	5000K	60°	L114.5*W25*H88mm
LI-MT310	Aluminum	48V	12W	3000K	60°	L222.3*W25*H85mm
LI-MT311	Aluminum	48V	12W	4000K	60°	L222.3*W25*H85mm
LI-MT312	Aluminum	48V	12W	5000K	60°	L222.3*W25*H85mm
LI-MT313	Aluminum	48V	18W	3000K	60°	L330.3*W25*H85mm
LI-MT314	Aluminum	48V	18W	4000K	60°	L330.3*W25*H85mm
LI-MT315	Aluminum	48V	18W	5000K	60°	L330.3*W25*H85mm



> 90



IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT286	Aluminum	48V		3000K	24°	L174*W49.5*H97.5mm
LI-MT287	Aluminum	48V		4000K	24°	L174*W49.5*H97.5mm
LI-MT288	Aluminum	48V		5000K	24°	L174*W49.5*H97.5mm

LED Adjustable Track Grille Light



LED Track Spotlight



> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT143	Aluminum	48V	5W	3000K	24°	L135*W31*H112.5mm
LI-MT144	Aluminum	48V	5W	4000K	24°	L135*W31*H112.5mm
LI-MT145	Aluminum	48V	5W	5000K	24°	L135*W31*H112.5mm
LI-MT001	Aluminum	48V	7W	3000K	24°	L135*W31*H162.5mm
LI-MT146	Aluminum	48V	7W	4000K	24°	L135*W31*H162.5mm
LI-MT147	Aluminum	48V	7W	5000K	24°	L135*W31*H162.5mm
LI-MT148	Aluminum	48V	12W	3000K	24°	L135*W45*H149mm
LI-MT016	Aluminum	48V	12W	4000K	24°	L135*W45*H149mm
LI-MT149	Aluminum	48V	12W	5000K	24°	L135*W45*H149mm
LI-MT150	Aluminum	48V	15W	3000K	24°	L135*W45*H188mm
LI-MT151	Aluminum	48V	15W	4000K	24°	L135*W45*H188mm
LI-MT152	Aluminum	48V	15W	5000K	24°	L135*W45*H188mm



> 90



IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT153	Aluminum	48V	12W	3000K	24°	L134*W49*H188mm
LI-MT006	Aluminum	48V	12W	4000K	24°	L134*W49*H188mm
LI-MT154	Aluminum	48V	12W	5000K	24°	L134*W49*H188mm
LI-MT155	Aluminum	48V	20W	3000K	24°	L134*W61*H200.5mm
LI-MT156	Aluminum	48V	20W	4000K	24°	L134*W61*H200.5mm
LI-MT157	Aluminum	48V	20W	5000K	24°	L134*W61*H200.5mm
LI-MT158	Aluminum	48V	30W	3000K	24°	L134*W75*H206.5mm
LI-MT159	Aluminum	48V	30W	4000K	24°	L134*W75*H206.5mm
LI-MT160	Aluminum	48V	30W	5000K	24°	L134*W75*H206.5mm

LED Track Spotlight



LED Track Spotlight



> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT161	Aluminum	48V	12W	3000K	24°	L135*W50*H175
LI-MT162	Aluminum	48V	12W	4000K	24°	L135*W50*H175
LI-MT163	Aluminum	48V	12W	5000K	24°	L135*W50*H175

CRI

> 90

IP20




Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT204	Aluminum	48V	8W	3000K	10° / 20° / 30°	L135*φ70*H92.5mm
LI-MT205	Aluminum	48V	8W	4000K	10° / 20° / 30°	L135*φ70*H92.5mm
LI-MT206	Aluminum	48V	8W	5000K	10° / 20° / 30°	L135*φ70*H92.5mm
LI-MT207	Aluminum	48V	12W	3000K	10° / 20° / 30°	135*φ90*H96mm
LI-MT208	Aluminum	48V	12W	4000K	10° / 20° / 30°	135*φ90*H96mm
LI-MT209	Aluminum	48V	12W	5000K	10° / 20° / 30°	135*φ90*H96mm

LED Track Spotlight



LED Track Pendant Light

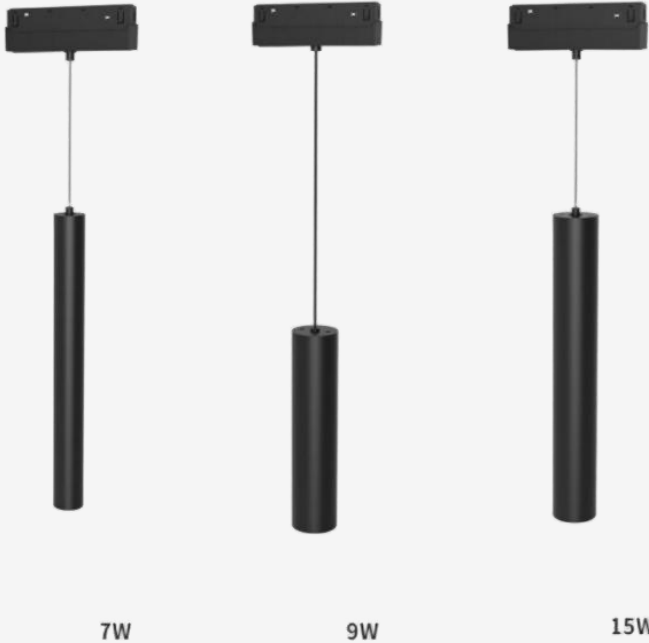

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT185	Aluminum	48V	9W	3000K	20°	L134*W50*H1000mm
LI-MT186	Aluminum	48V	9W	4000K	20°	L134*W50*H1000mm
LI-MT187	Aluminum	48V	9W	5000K	20°	L134*W50*H1000mm
LI-MT188	Aluminum	48V	7W	3000K	15°24°36°60°	L135*W32*H1000mm
LI-MT189	Aluminum	48V	7W	4000K	15°24°36°60°	L135*W32*H1000mm
LI-MT190	Aluminum	48V	7W	5000K	15°24°36°60°	L135*W32*H1000mm
LI-MT191	Aluminum	48V	15W	3000K	15°24°36°60°	L135*W45*H1000mm
LI-MT192	Aluminum	48V	15W	4000K	15°24°36°60°	L135*W45*H1000mm
LI-MT193	Aluminum	48V	15W	5000K	15°24°36°60°	L135*W45*H1000mm

CRI > 90

 IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT66	Aluminum	48V	8W	3000K	24°	L135*W55*H151
LI-MT67	Aluminum	48V	8W	4000K	24°	L135*W55*H151
LI-MT68	Aluminum	48V	8W	5000K	24°	L135*W55*H151
LI-MT69	Aluminum	48V	16W	3000K	24°	L135*W100*H265
LI-MT018	Aluminum	48V	16W	4000K	24°	L135*W100*H265
LI-MT170	Aluminum	48V	16W	5000K	24°	L135*W100*H265
LI-MT171	Aluminum	48V	16W	3000K	24°	L135*W100*H151
LI-MT172	Aluminum	48V	16W	4000K	24°	L135*W100*H151
LI-MT173	Aluminum	48V	16W	5000K	24°	L135*W100*H151

LED Track Spotlight



LED Track Ambient Light



CRI

> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT210	Aluminum	48V	3W	3000K	90°	φ180*H46mm
LI-MT211	Aluminum	48V	3W	4000K	90°	φ180*H46mm
LI-MT212	Aluminum	48V	3W	5000K	90°	φ180*H46mm



> 90



IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT179	Aluminum	48V	12W	3000K	24°	L135.5*W100*H1000
LI-MT180	Aluminum	48V	12W	4000K	24°	L135.5*W100*H1000
LI-MT181	Aluminum	48V	12W	5000K	24°	L135.5*W100*H1000
LI-MT182	Aluminum	48V	12W	3000K	24°	L135*W100*H1000
LI-MT183	Aluminum	48V	12W	4000K	24°	L135*W100*H1000
LI-MT184	Aluminum	48V	12W	5000K	24°	L135*W100*H1000

LED Track Pendant Ball Light



LI-MT179/LI-MT180/LI-MT181



LI-MT182/LI-MT183/LI-MT184

LED Track Pendant Ball Light



LI-MT74/LI-MT175/LI-MT176



LI-MT177/LI-MT019/LI-MT178



> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT174	Aluminum	48V	10W	3000K	135°	L135.5*W100*H135
LI-MT175	Aluminum	48V	10W	4000K	135°	L135.5*W100*H135
LI-MT176	Aluminum	48V	10W	5000K	135°	L135.5*W100*H135
LI-MT177	Aluminum	48V	10W	3000K	135°	L134*W100*H1000
LI-MT019	Aluminum	48V	10W	4000K	135°	L134*W100*H1000
LI-MT178	Aluminum	48V	10W	5000K	135°	L134*W100*H1000



> 90



IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT228	Aluminum +Glass	48V	3W	3000K	10°-60°	L60*D80*H97mm
LI-MT229	Aluminum +Glass	48V	3W	4000K	10°-60°	L60*D80*H97mm
LI-MT230	Aluminum +Glass	48V	3W	5000K	10°-60°	L60*D80*H97mm
LI-MT231	Aluminum +Glass	48V	5W	3000K	10°-60°	L60*D100*H118mm
LI-MT232	Aluminum +Glass	48V	5W	4000K	10°-60°	L60*D100*H118mm
LI-MT233	Aluminum +Glass	48V	5W	5000K	10°-60°	L60*D100*H118mm
LI-MT234	Aluminum +Glass	48V	5W	3000K	10°-60°	L60*D120*H139.5mm
LI-MT235	Aluminum +Glass	48V	5W	4000K	10°-60°	L60*D120*H139.5mm
LI-MT236	Aluminum +Glass	48V	5W	5000K	10°-60°	L60*D120*H139.5mm

LED Track Glass Ball Light



LED Track Glass Ball Pendant Light



> 90



IP20

Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT237	Aluminum +Glass	48V	3W	3000K	360°	L60*D80*H97mm
LI-MT238	Aluminum +Glass	48V	3W	4000K	360°	L60*D80*H97mm
LI-MT239	Aluminum +Glass	48V	3W	5000K	360°	L60*D80*H97mm
LI-MT240	Aluminum +Glass	48V	5W	3000K	360°	L60*D100*H118mm
LI-MT241	Aluminum +Glass	48V	5W	4000K	360°	L60*D100*H118mm
LI-MT242	Aluminum +Glass	48V	5W	5000K	360°	L60*D100*H118mm
LI-MT243	Aluminum +Glass	48V	5W	3000K	360°	L60*D120*H139.5mm
LI-MT023	Aluminum +Glass	48V	5W	4000K	360°	L60*D120*H139.5mm
LI-MT244	Aluminum +Glass	48V	5W	5000K	360°	L60*D120*H139.5mm



> 90



IP20




Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT245	Aluminum +Glass	48V	3W	3000K	360°	L60*D80*H97mm
LI-MT246	Aluminum +Glass	48V	3W	4000K	360°	L60*D80*H97mm
LI-MT247	Aluminum +Glass	48V	3W	5000K	360°	L60*D80*H97mm
LI-MT248	Aluminum +Glass	48V	5W	3000K	360°	L60*D100*H118mm
LI-MT249	Aluminum +Glass	48V	5W	4000K	360°	L60*D100*H118mm
LI-MT250	Aluminum +Glass	48V	5W	5000K	360°	L60*D100*H118mm
LI-MT251	Aluminum +Glass	48V	5W	3000K	360°	L60*D120*H139.5mm
LI-MT252	Aluminum +Glass	48V	5W	4000K	360°	L60*D120*H139.5mm
LI-MT253	Aluminum +Glass	48V	5W	5000K	360°	L60*D120*H139.5mm

LED Track Glass Ball Light



LED Track Glass Ball Pendant Light

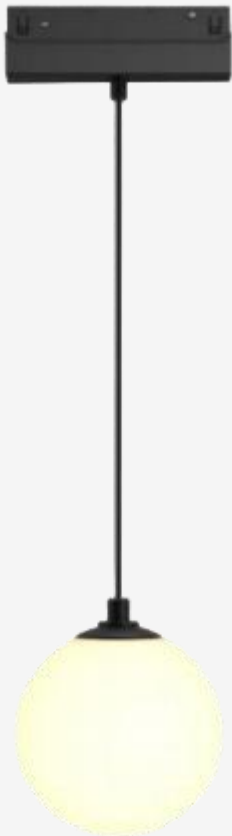

> 90



IP20


Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT254	Aluminum +Glass	48V	3W	3000K	360°	L60*D80*H97mm
LI-MT255	Aluminum +Glass	48V	3W	4000K	360°	L60*D80*H97mm
LI-MT256	Aluminum +Glass	48V	3W	5000K	360°	L60*D80*H97mm
LI-MT257	Aluminum +Glass	48V	5W	3000K	360°	L60*D100*H118mm
LI-MT258	Aluminum +Glass	48V	5W	4000K	360°	L60*D100*H118mm
LI-MT259	Aluminum +Glass	48V	5W	5000K	360°	L60*D100*H118mm
LI-MT260	Aluminum +Glass	48V	5W	3000K	360°	L60*D120*H139.5mm
LI-MT024	Aluminum +Glass	48V	5W	4000K	360°	L60*D120*H139.5mm
LI-MT261	Aluminum +Glass	48V	5W	5000K	360°	L60*D120*H139.5mm



> 90



IP20



Code No.	Material	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-MT194	Aluminum	48V	6W	3000K	180°	L302*W28*H102
LI-MT020	Aluminum	48V	6W	4000K	180°	L302*W28*H102
LI-MT195	Aluminum	48V	6W	5000K	180°	L302*W28*H102
LI-MT196	Aluminum	48V	12W	3000K	180°	L602*W28*H102
LI-MT197	Aluminum	48V	12W	4000K	180°	L602*W28*H102
LI-MT198	Aluminum	48V	12W	5000K	180°	L602*W28*H102

LED Track Round Tube Light



Srio Series S203 Track & Accessories



LI-PMT01
Surface & Hanging Track 48V
L1000*W25.8*H49mm



LI-PMT101
Surface & Hanging Track 48V
L2000*W25.8*H49mm



LI-PMT102
Surface & Hanging Track 48V
L3000*W25.8*H49mm



LI-PMT10
Embedded Track 48V
L1000*W62.2*H46.2mm



LI-PMT11
Embedded Track 48V
L2000*W62.2*H46.2mm



LI-PMT12
Embedded Track 48V
L3000*W62.2*H46.2mm



LI-PMT116
Embedded Track 48V
L1000*W51.65*H45.36mm



LI-PMT117
Embedded Track 48V
L2000*W51.65*H45.36mm



LI-PMT119
Embedded Track 48V
L3000*W51.65*H45.36mm



LI-PMT125
Embedded Track 48V
L1000*W39.76*H49mm



LI-PMT126
Embedded Track 48V
L2000*W39.76*H49mm



LI-PMT127
Embedded Track 48V
L3000*W39.76*H49mm




LI-PMT103
Horizontal Corner
48V



LI-PMT104
Vertical Corner Inner
48V



LI-PMT105
Vertical Corner Outer
48V



LI-PMT106
" T " Track Corner
48V



LI-PMT107
" X " Track Corner
48V



LI-PMT108
Hanging Accessories
Iron

Srio Series S203 Track & Accessories



LI-PMT109
Surface Clip
Iron



LI-PMT110
Track Plug
Plastic



LI-PMT135
Input-50cm



LI-PMT136
Input-200cm



LI-PMT03
Corner Connector



LI-PMT04
Connector



LI-PMT136
" T " Connector



LI-PMT137
" X " Connector



LI-PMT138
Track connector



LI-PMT16
Power Supply Input:180-265V
Out Put:48V Wire:50cm



LI-PMT02
Power Supply Input:180-265V
Out Put:48V Wire:50cm

**5.5MM ULTRA-THIN
MAGNETIC
TRACK LIGHT**

Ultra Series S25

48V | 25MM


Beyond Light, To the Last Details..



5.5 mm Thin Thickness

To a thin magnetic orbit with a thickness of only 5.5mm
Ultra-thinline design creates minimalist space beauty



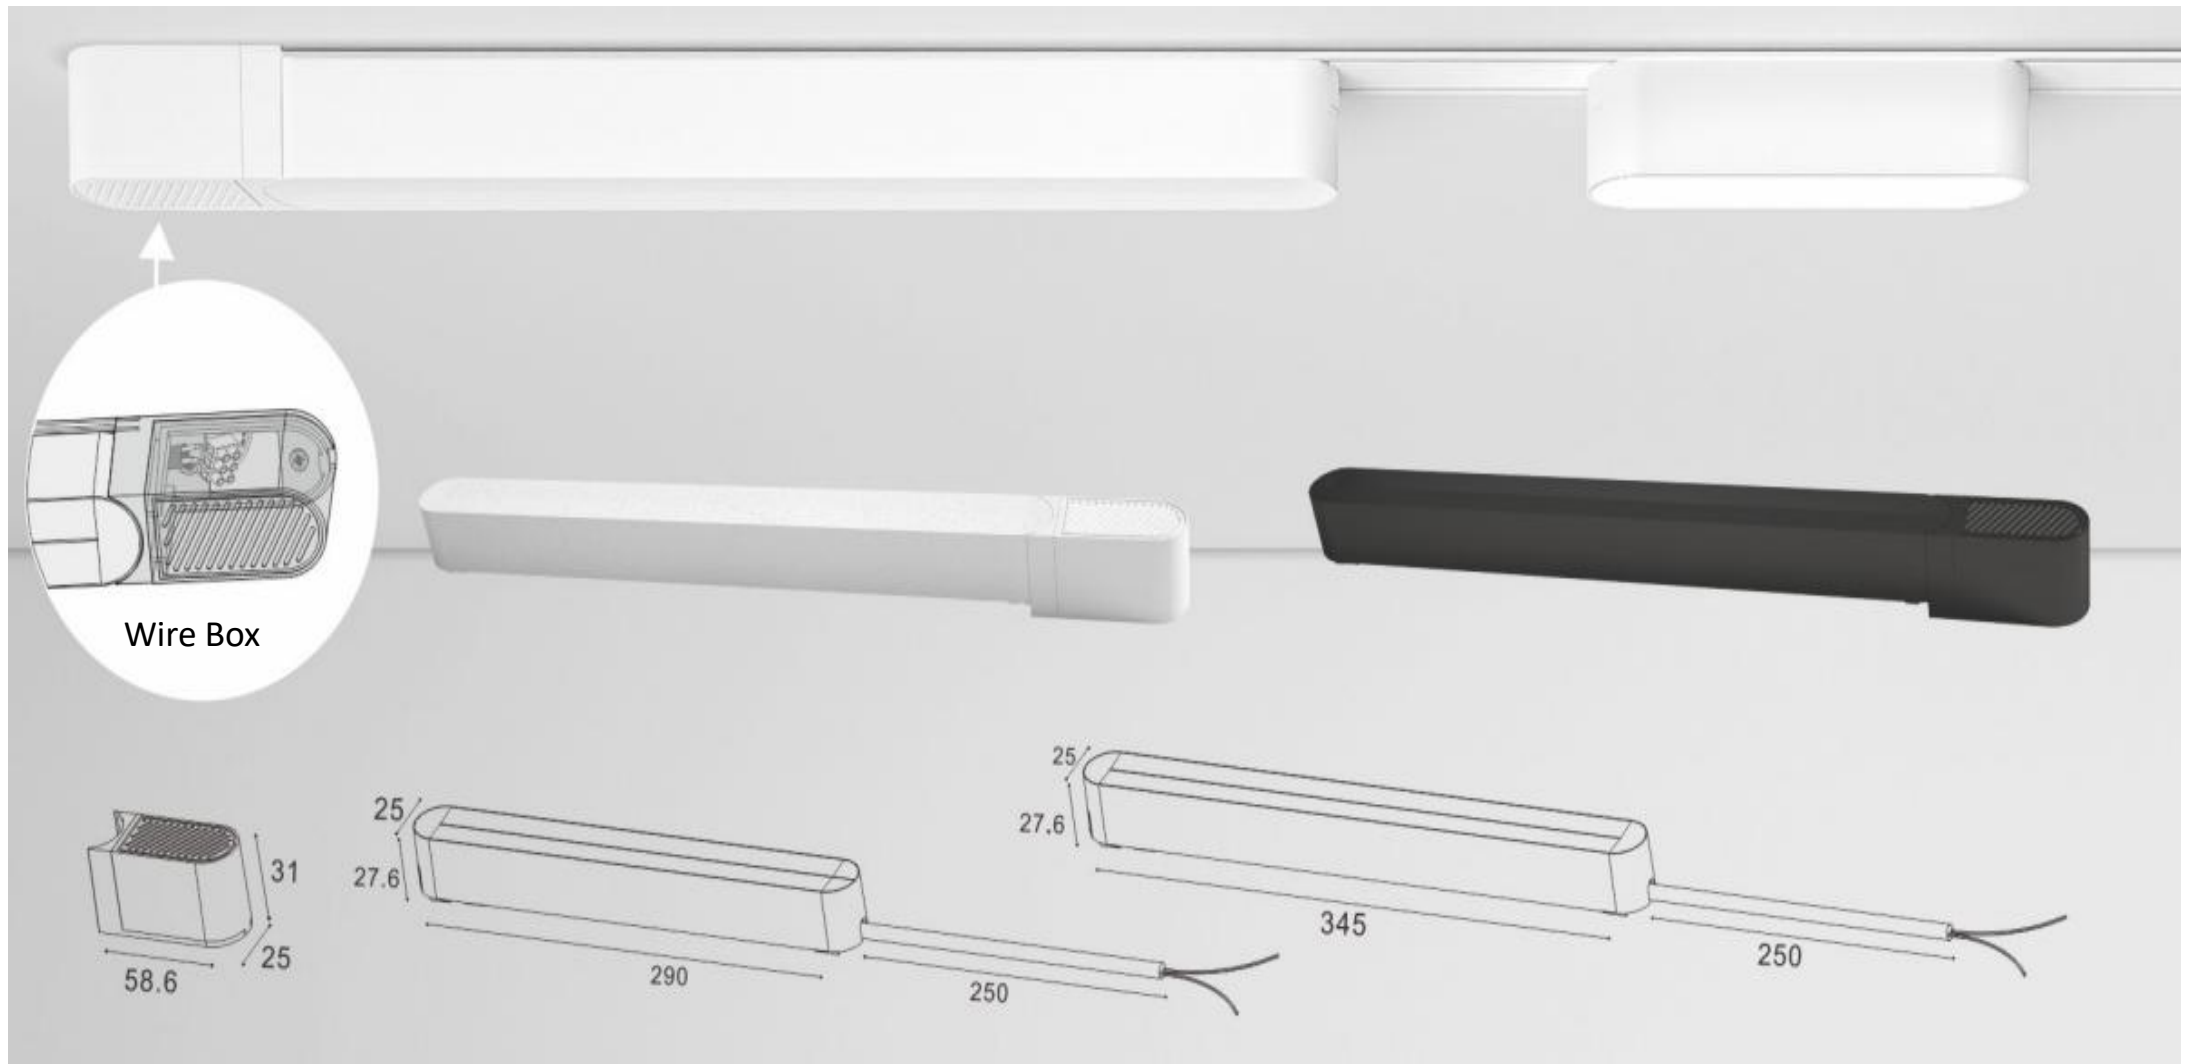


48V Power Supply

Crafted with a die-cast aluminum housing, this luminaire offers exceptional sturdiness and long-lasting durability. Engineered for reliable performance, it comes with a 3-year warranty for your peace of mind.

Magnetic Design

Offer flexibility, easy installation, customizable setups, and sleek aesthetics, all crafted from durable aluminum, making it ideal for dynamic and modern spaces.

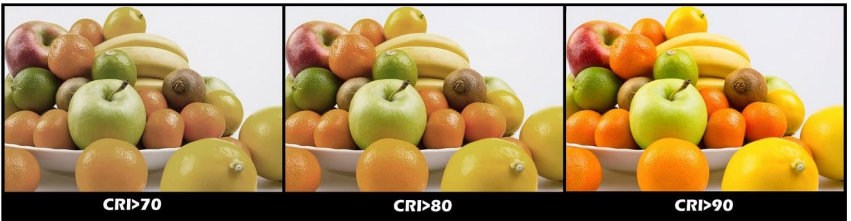

The LED Magnetic Track Light with a high CRI of 90 ensures accurate color rendering, vibrant visuals, and enhanced lighting quality for professional and aesthetic spaces.

CRI 90



LED Track Flood Light



CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-FLR6	Aluminum	48V	6W	364lm	90°	L114.5*W25*H27.5mm
LI-UT25-FLR12	Aluminum	48V	12W	757lm	90°	L222.3*W25*H27.5mm
LI-UT25-FLR18	Aluminum	48V	16W	974lm	90°	L330.3*W25*H27.5mm


CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-GLR6	Aluminum	48V	6W	643lm	24°/36°	L114.5*W25*H27.5mm
LI-UT25-GLR12	Aluminum	48V	12W	1329lm	24°/36°	L222.3*W25*H27.5mm
LI-UT25-GLR18	Aluminum	48V	16W	1339lm	24°/36°	L330.3*W25*H27.5mm

LED Track Grille Light



LED Track Grille Light



> 90



3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-AGR6	Aluminum	48V	6W	85.16 lm	60°	L114.5*W25*H27.5mm
LI-UT25-AGR12	Aluminum	48V	12W	141.3 lm	60°	L222.3*W25*H27.5mm
LI-UT25-AGR18	Aluminum	48V	16W	149.2lm	60°	L330.3*W25*H27.5mm

CRI

> 90

CCT

3000K / 4000K / 5000K



Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-D70B-8W	Aluminum	48V	8W	400.7lm	24°/36°/50°	H54*φ70mm
LI-UT25-D70C-8W	Aluminum	48V	8W	713.48 lm	24°/36°/50°	H54*φ70mm
LI-UT25-D70S-8W	Aluminum	48V	8W	674.3lm	24°/36°/50°	H54*φ70mm
LI-UT25-D70P-8W	Aluminum	48V	8W	572.83 lm	polarized light	H55.6*φ70mm
LI-UT25-D70M-8W	Aluminum	48V	8W	601.1lm	10°/20°/30°	L114.5*φ70*H75mm
LI-UT25-D90M-12W	Aluminum	48V	12W	917.30 lm	10°/20°/30°	114.5*φ90*H78.5mm

LED Track Spotlight



LI-UT25-D70B/C/S/P



LI-UT25-D70M/90M

LED Track Spotlight



CRI

> 90

CCT

3000K / 4000K

Code No.	Material	Voltage	Power	Beam Angle	Size (mm)
LI-UT25-D40-5W	Aluminum	48V	5W	10°/20°/30°	L114.5*D40*H67.5mm

CRI

> 90

CCT

3000K / 4000K

Code No.	Material	Voltage	Power	Beam Angle	Size (mm)
LI-UT25-B70A	Aluminum	48V	10W	10°/20°/30°	L114.5*D70*H110mm



LED Track Spotlight



CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-HD-12W	Aluminum	48V	12W	1141lm	10°/24°/38°/60°	L114.5*W50*H156mm

CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-SL-5W	Aluminum	48V	5W	521.45 lm	15°/24°/36°/60°	L114.5*W31*H95mm
LI-UT25-SL-5W*2	Aluminum	48V	5W*2	988.30 lm	15°/24°/36°/60°	L114.5*W31*H95mm
LI-UT25-SL-7W	Aluminum	48V	7W	682.86 lm	15°/24°/36°/60°	L114.5*W31*H145mm
LI-UT25-SL-7W*2	Aluminum	48V	7W*2	1173.01 lm	15°/24°/36°/60°	L114.5*W31*H145mm
LI-UT25-SL-12W	Aluminum	48V	12W	1075.72 lm	15°/24°/36°/60°	L114.5*W45*H130mm
LI-UT25-SL-15W	Aluminum	48V	15W	1437.96 lm	15°/24°/36°/60°	L114.5*W45*H170mm

LED Track Spotlight



LED Track Spotlight



CRI > 90 CCT 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-PST-8W	Aluminum	48V	8W	826.47 lm	15°/24°/38°/60°	L114.5*W42*H132mm
LI-UT25-PST-16W-LR	Aluminum	48V	16W	1403.6 lm	15°/24°/38°/60°	L114.5*W42*H132mm
LI-UT25-PST-16W-UD	Aluminum	48V	16W	1715.30 lm	15°/24°/38°/60°	L114.5*W42*H242mm


CRI > 90 CCT 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-FM-7W	Aluminum	48V	7W	717.92 lm	15°/24°/36°/60°	L114.5*W32*H1000mm
LI-UT25-FM-9W	Aluminum	48V	9W	915.02 lm	20°/40°/60°	L114.5*W50*H1000mm
LI-UT25-FM-15W	Aluminum	48V	15W	560.9 lm	15°/24°/36°/60°	L114.5*W45*H1000mm

LED Track Pendant Light



LED Track Pendant Light

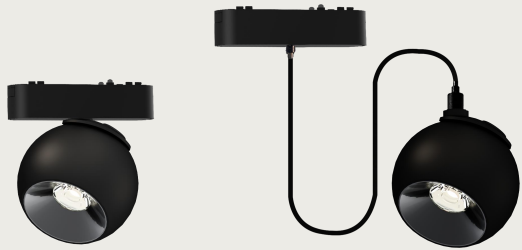

CRI

> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-MBO-A	Aluminum	48V	12W	1098.33 lm	24°/36°	L114.5*W100*H115mm
LI-UT25-MBO-B	Aluminum	48V	12W	1014.36 lm	24°/36°	L114.5*W100*H1000mm

CRI

> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-BL	Aluminum	48V	10W	1031.83 lm	135°	L114.5*W100*H125mm
LI-UT25-BL2	Aluminum	48V	10W	992.21 lm	135°	L114.5*W100*H1000mm

LED Track Pendant Light



LED Adjustable Track Spotlight



CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-ZJ-7W	Aluminum	48V	7W	599.2lm	10°-60°	L114.5*W50*H144mm
LI-UT25-ZJ-12W	Aluminum	48V	12W	1003.47 lm	10°-60°	L114.5*W60*H192mm
LI-UT25-ZJ-15W	Aluminum	48V	15W	1399.2lm	10°-60°	L114.5*W70*H197mm


CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-TLE-7W	Aluminum	48V	7W	476.2 lm	15°/24°/38°	L114.5*W50*H154.5mm
LI-UT25-TLE-12W	Aluminum	48V	12W	718.9 lm	15°/24°/38°	L114.5*W50*H174.5mm
LI-UT25-TLE-15W	Aluminum	48V	15W	1157.7lm	15°/24°/38°	L114.5*W60*H209.5mm

LED Adjustable Track Spotlight



LED Adjustable Track Flood Light

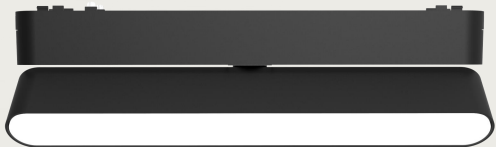

CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Beam Angle	Size (mm)
LI-UT25-FLRM6	Aluminum	48V	6W	90°	L114.5*W25*H58mm
LI-UT25-FLRM12	Aluminum	48V	12W	90°	L222.3*W25*H58mm
LI-UT25-FLRM18	Aluminum	48V	16W	90°	L330.3*W25*H58mm


CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Beam Angle	Size (mm)
LI-UT25-GLRM6	Aluminum	48V	6W	24°/36°	L114.5*W25*H58mm
LI-UT25-GLRM12	Aluminum	48V	12W	24°/36°	L222.3*W25*H58mm
LI-UT25-GLRM18	Aluminum	48V	16W	24°/36°	L330*W25*H58mm

LED Adjustable Track Grille Light



LED Adjustable Track Grille Light

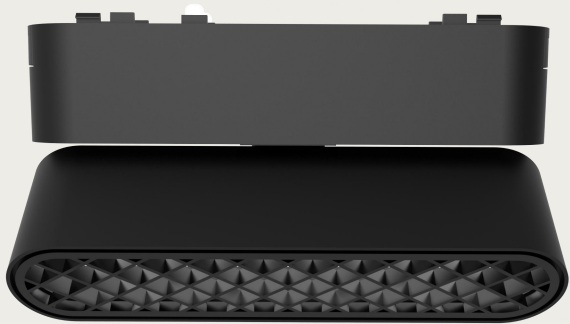

CRI


> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-UT25-AGRM6	Aluminum	48V	6W	85.16 lm	60°	L114.5*W25*H58mm
LI-UT25-AGRM12	Aluminum	48V	12W	141.3 lm	60°	L222.3*W25*H58mm
LI-UT25-AGRM18	Aluminum	48V	16W	149.2lm	60°	L330*W25*H58mm

LED Track Ball Light

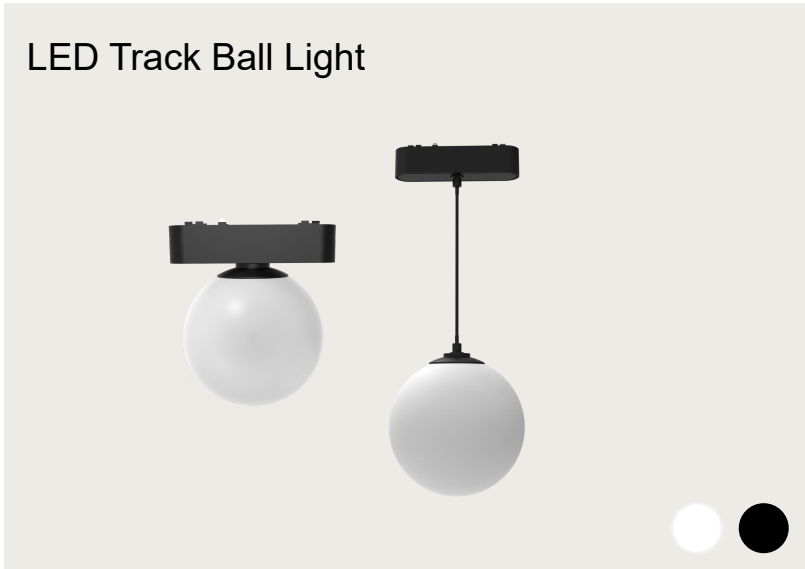


CRI > 90 **CCT** 3000K / 4000K

Code No.	Material	Voltage	Power	Beam Angle	Size (mm)
LI-UT25-MOON80-3W	Aluminum	48V	3W	360°	L114.5*D80*H107mm
LI-UT25-MOON100-5W	Aluminum	48V	5W	360°	L114.5*D100*H128mm
LI-UT25-MOON120-5W	Aluminum	48V	5W	360°	L114.5*D120*H149.5mm
LI-UT25-MOON80P-3W	Aluminum	48V	3W	360°	L114.5*D80*H1000mm
LI-UT25-MOON100P-5W	Aluminum	48V	5W	360°	L114.5*D100*H1000mm
LI-UT25-MOON120P-5W	Aluminum	48V	5W	360°	L114.5*D120*H1000mm

CRI > 90 **CCT** 3000K / 4000K

Code No.	Material	Voltage	Power	Beam Angle	Size (mm)
LI-UT25-SUN80-3W	Aluminum	48V	3W	360°	L114.5*D80*H115mm
LI-UT25-SUN100-5W	Aluminum	48V	5W	360°	L114.5*D100*H135mm
LI-UT25-SUN120-5W	Aluminum	48V	5W	360°	L114.5*D120*H155mm
LI-UT25-SUN80P-3W	Aluminum	48V	3W	360°	L114.5*D80*H1000mm
LI-UT25-SUN100P-5W	Aluminum	48V	5W	360°	L114.5*D100*H1000mm
LI-UT25-SUN120P-5W	Aluminum	48V	5W	360°	L114.5*D120*H1000mm

LED Track Ball Light

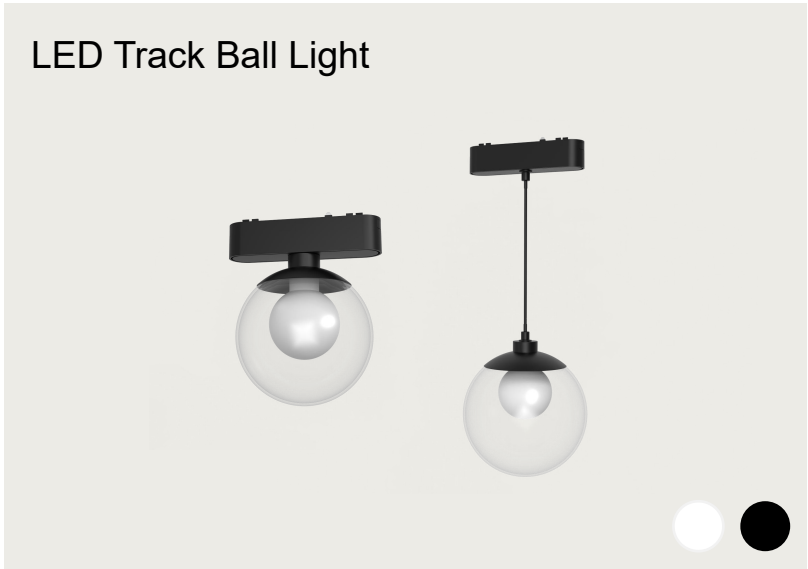

Ultra Series S25 Track & Accessories



LI-UT25-Rail-Black&Gold
L1000*W25*H5.5MM
L1500*W25*H5.5MM
L2000*W25*H5.5MM



LI-UT25-Rail-Black
L1000*W25*H5.5MM
L1500*W25*H5.5MM
L2000*W25*H5.5MM



LI-UT25-Rail-Black&White
L1000*W25*H5.5MM
L1500*W25*H5.5MM
L2000*W25*H5.5MM



LI-UT25-Rail-White
L1000*W25*H5.5MM
L1500*W25*H5.5MM
L2000*W25*H5.5MM



LI-UT25-Rail-White&Gold
L1000*W25*H5.5MM
L1500*W25*H5.5MM
L2000*W25*H5.5MM



LI-UT25-Rail-White&Black
L1000*W25*H5.5MM
L1500*W25*H5.5MM
L2000*W25*H5.5MM



LI-UT25-R2 Black/White
L1000*W65*H38
L1500*W65*H38
L2000*W65*H38



LI-UT25-R4 Black/White
L1000*W44.8*H41
L1500*W44.8*H41
L2000*W44.8*H41



LI-UT25-S Black/White
L1000*W28.4*H56.8
L1500*W28.4*H56.8
L2000*W28.4*H56.8



LI-UT25-RU Black/White
L1000*W43.5*H45
L1500*W43.5*H45
L2000*W43.5*H45



LI-UT25-R2C Black/White
L1000*W65.5*H32.2
L1500*W65.5*H32.2
L2000*W65.5*H32.2



LI-UT25-R2C Black/White
L1000*W65.5*H32.2
L1500*W65.5*H32.2
L2000*W65.5*H32.2




LI-UT25-R4C Black/White
L1000*W44.8*H41
L1500*W44.8*H41
L2000*W44.8*H41




LI-UT25-SC Black/White
L1000*W28.4*H56.8
L1500*W28.4*H56.8
L2000*W28.4*H56.8



LI-UT25-RUC Black/White
L1000*W43.5*H45
L1500*W43.5*H45
L2000*W43.5*H45



LI-UT25-R2
34*64*34




LI-UT25-R2
68*68*34




LI-UT25-L
55*25*5.5


Ultra Series S25 Track & Accessories



LI-UT25-C
50*25*5.5




LI-UT25-T
85*25*5.5




LI-UT25-X
110*25*5.5



LI-UT25-IN
55*25*5.5



LI-UT25-I
30*25*5.5



LI-UT25-Through Input
Connector
50*25*5.7



LI-UT25-Input Module
550*25*18



LI-UT25-Corner Module
172*25*18



LI-UT25-pass-through module
120*25*18




LI-Built-in power supply-48V
100W/200W
239*25*25 / 259*25*25




LI-UT25-S
0.88kg


4.5MM ULTRA-THIN MAGNETIC TRACK LIGHT	ETSlim Series S16
	40-48V 16MM

Beyond Light, To the Last Details..

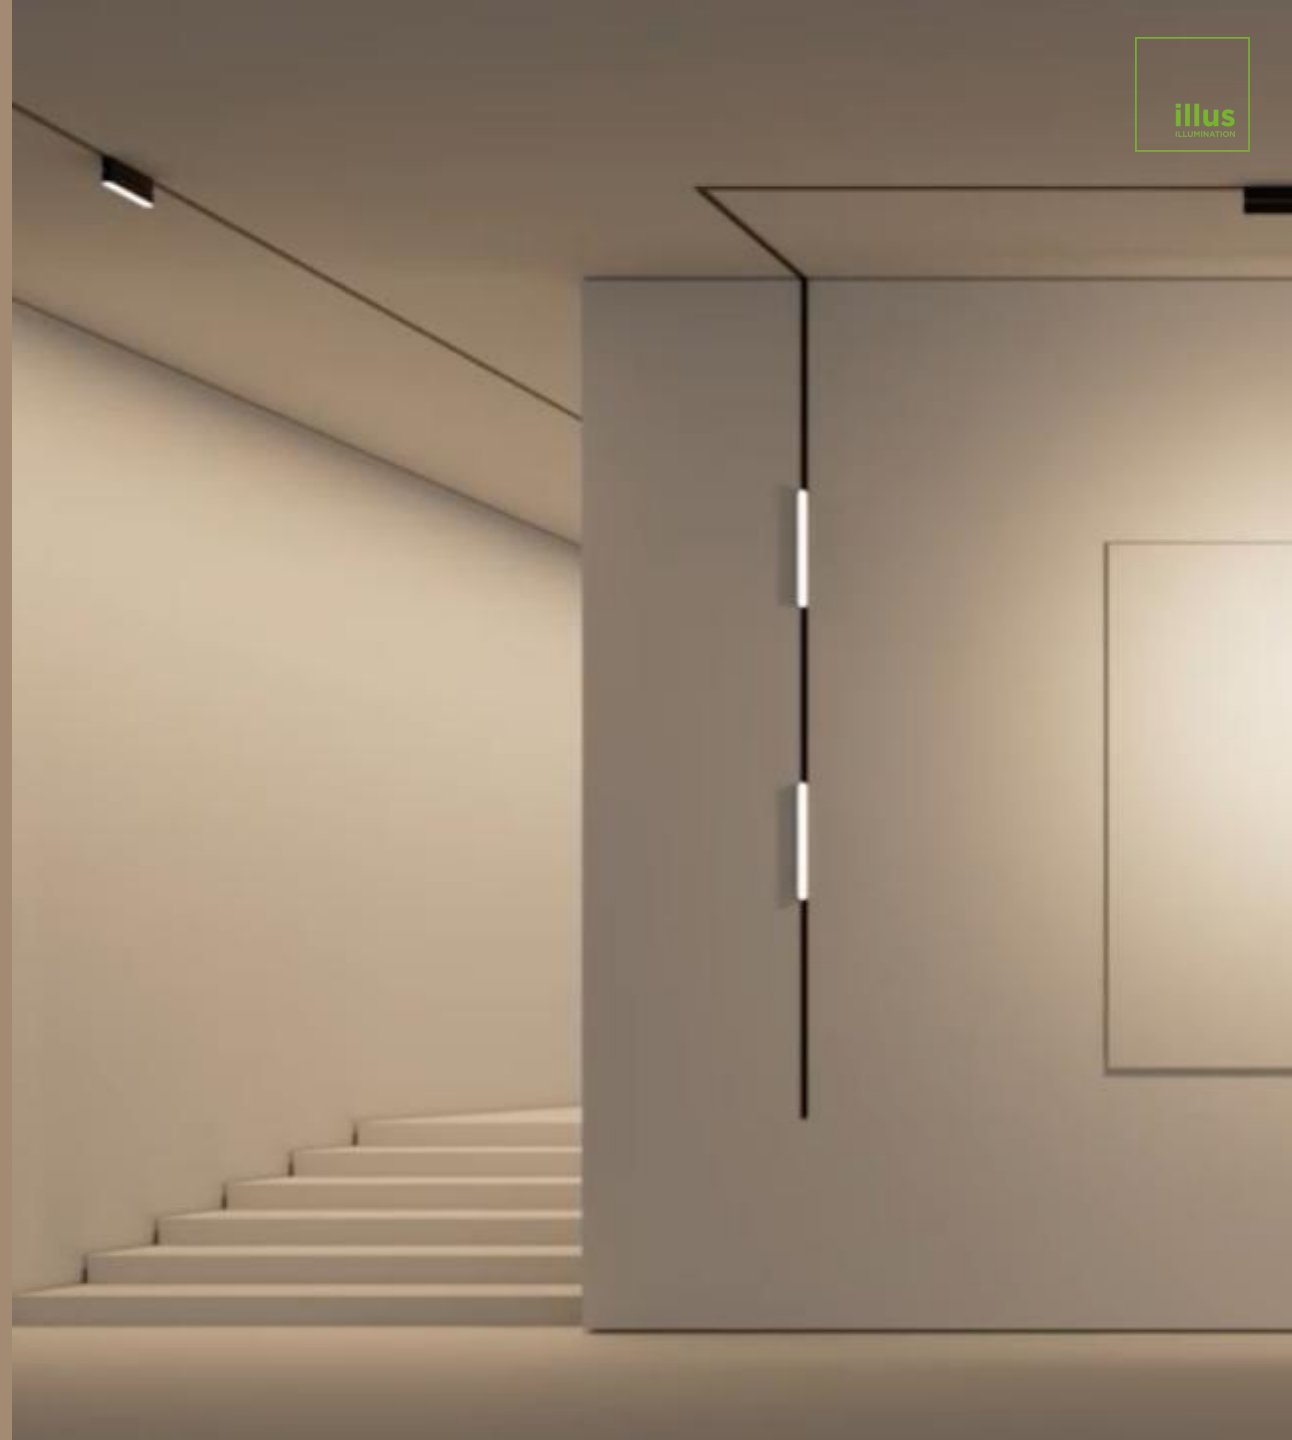

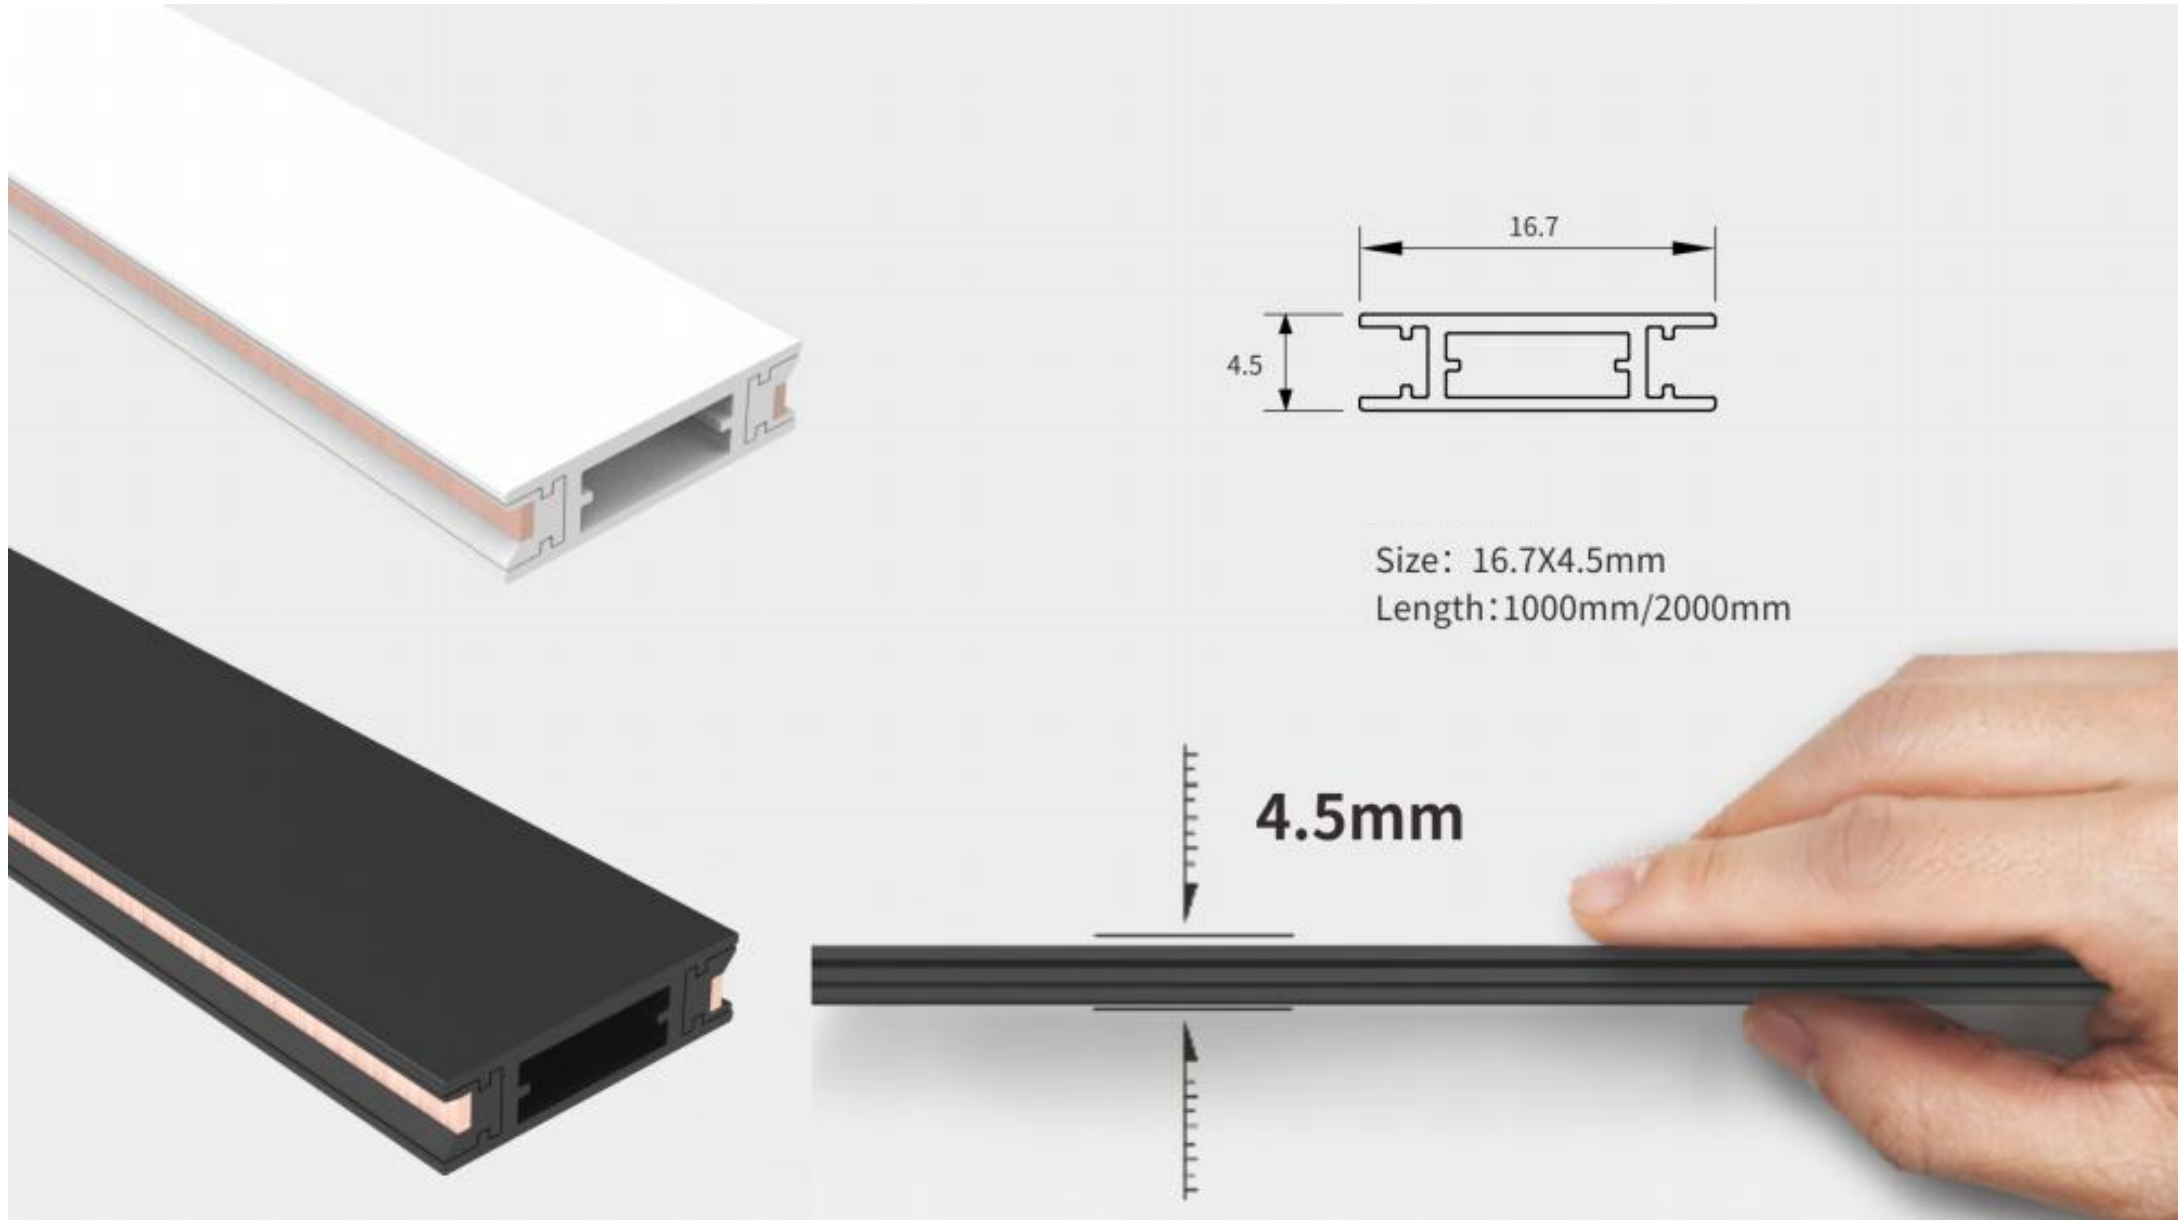

Ultrathin track system
Multipurpose installation to address
various installation limitations.

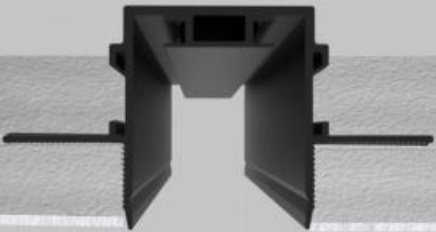

Concealed track
combination



Surface mounted
track combination






Surface mounted / lifting track



Embedded track




Embedded track




Hoisting track assembly


Ultrathin Track Installation

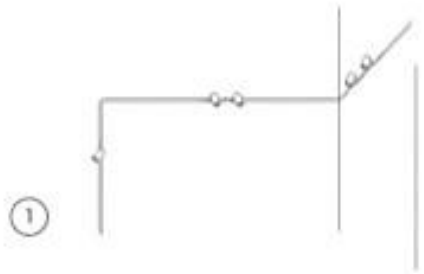


①
Create your own design
with Minimal Track.

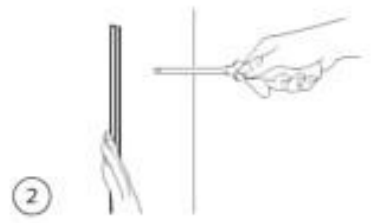


②
Fix your setting into the wall.

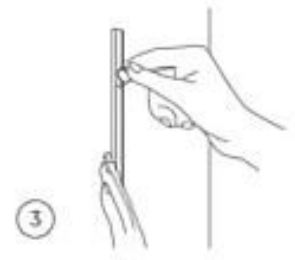


③
Electrify the entire path
with the flexible rubber.

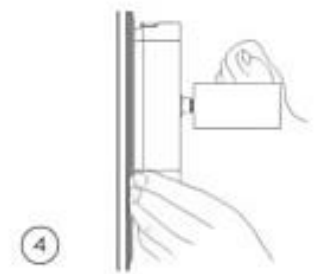

④
Place the luminary and fix it.

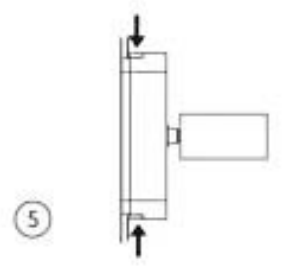


⑤
Pressing the buttons on both sides
means they are locked, unlocking
means they are ejected

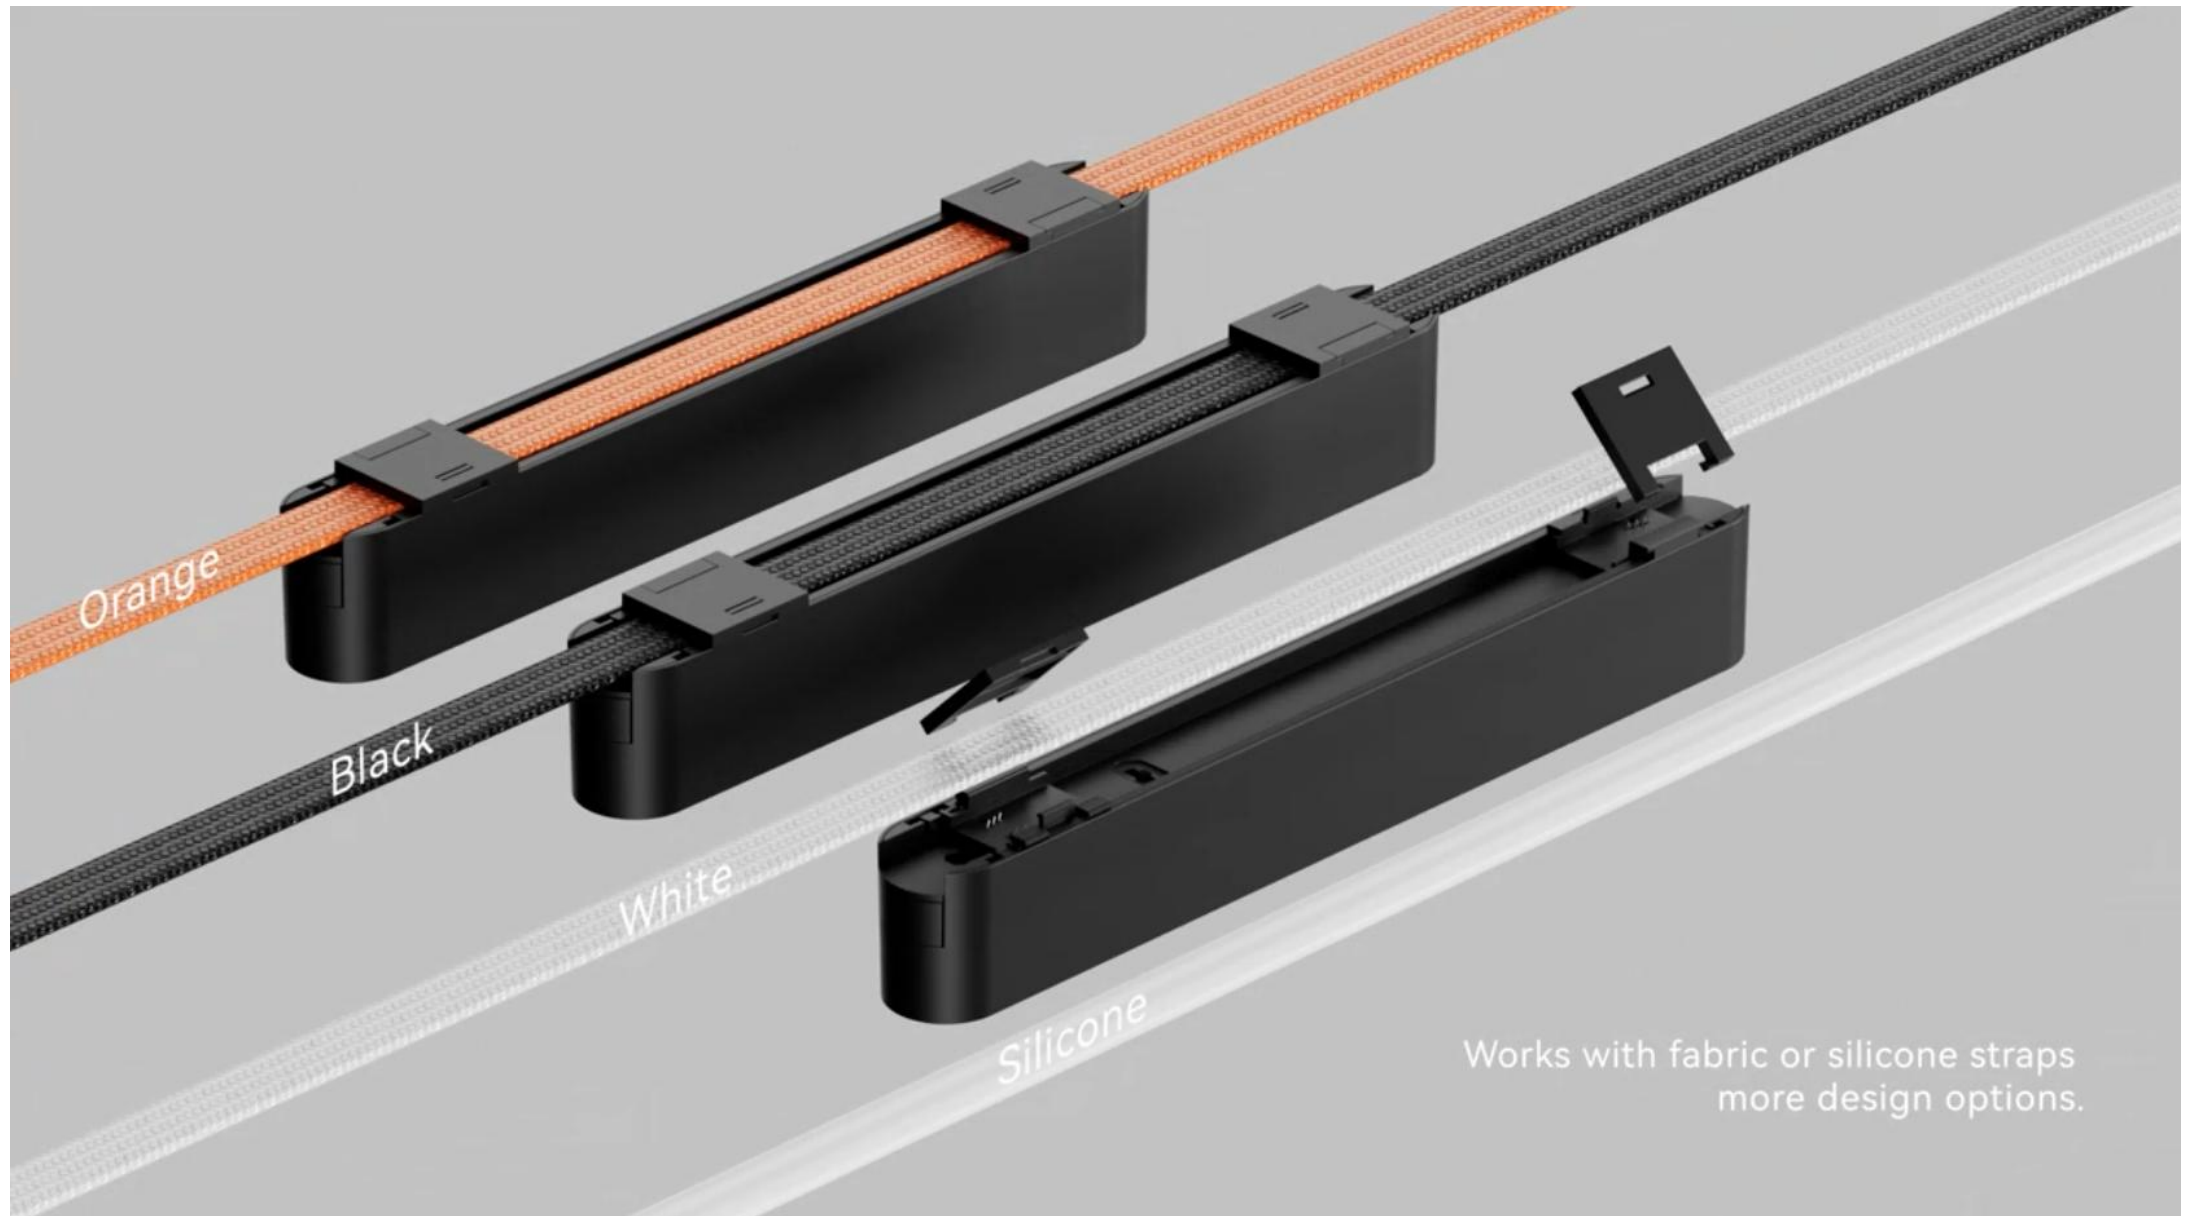



Ultrathin Track

LED Track Flood Light

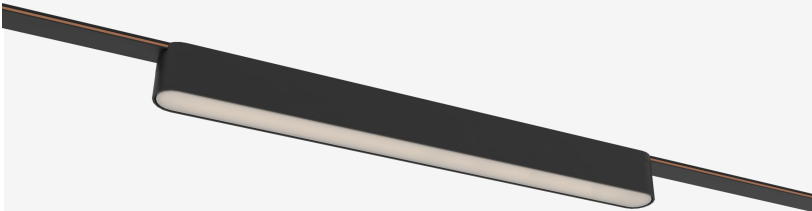







CRI

> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-FLR6	Aluminum	40-48V	6W	338lm	100°	L114.5xW25xH31.5
LI-ET16R-FLR12	Aluminum	40-48V	12W	664lm	100°	L222xW25xH31.5
LI-ET16R-FLR18	Aluminum	40-48V	16W	921lm	100°	L330xW25xH31.5

CRI > 90

CCT 3000K / 4000K / 5000K





Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-GLR6	Aluminum	40-48V	6W	583LM	24° / 36°	L114.5xW25xH31.5
LI-ET16R-GLR12	Aluminum	40-48V	12W	1134LM	24° / 36°	L222xW25xH31.5
LI-ET16R-GLR18	Aluminum	40-48V	16W	1521LM	24° / 36°	L330xW25xH31.5

LED Track Grille Light



LED Track Grille Light

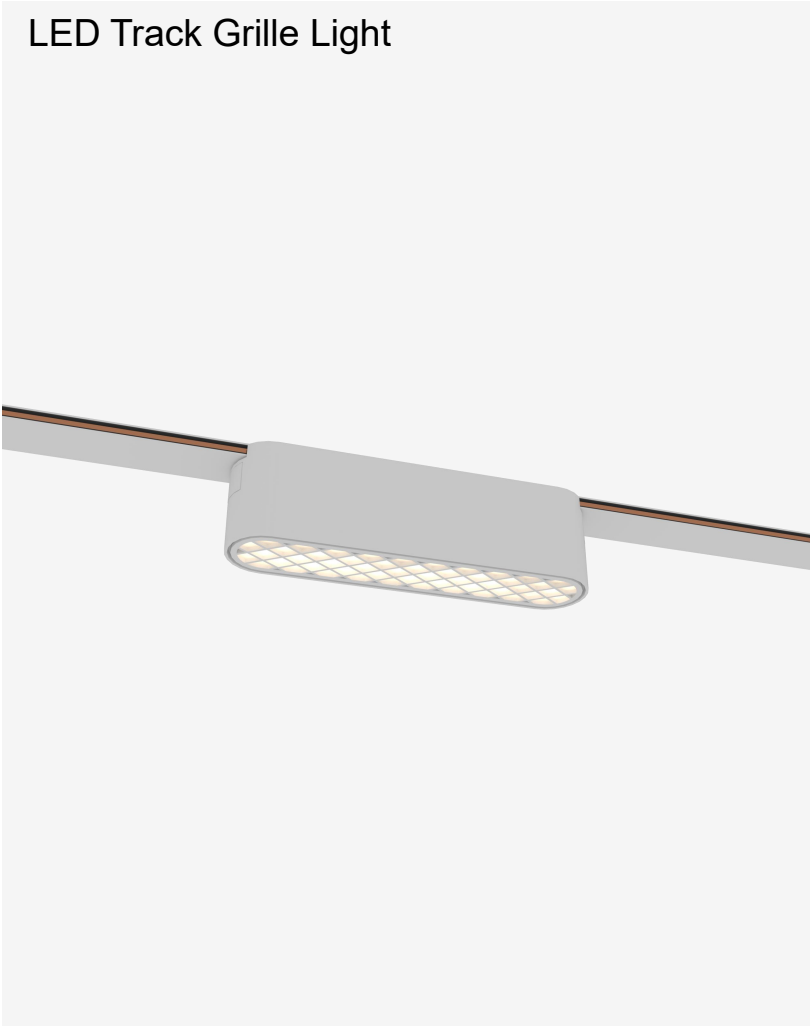





CRI

> 90

CCT

3000K / 4000K / 5000K



Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-AGR6	Aluminum	40-48V	6W	104LM	60°	L114.5xW25xH31.5
LI- ET16R-AGR12	Aluminum	40-48V	12W	150LM	60°	L222xW25xH31.5
LI-ET16R-AGR18	Aluminum	40-48V	16W	156LM	60°	L330xW25xH31.5

CRI > 90


CCT 3000K / 4000K / 5000K



Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-FLRM6	Aluminum	40-48V	6W	384LM	100°	L114.5xW25xH64.5
LI-ET16R-FLRM12	Aluminum	40-48V	12W	701LM	100°	L222.3xW25xH64.5
LI-ET16R-FLRM18	Aluminum	40-48V	16W	922LM	100°	L330.3xW25xH64.5

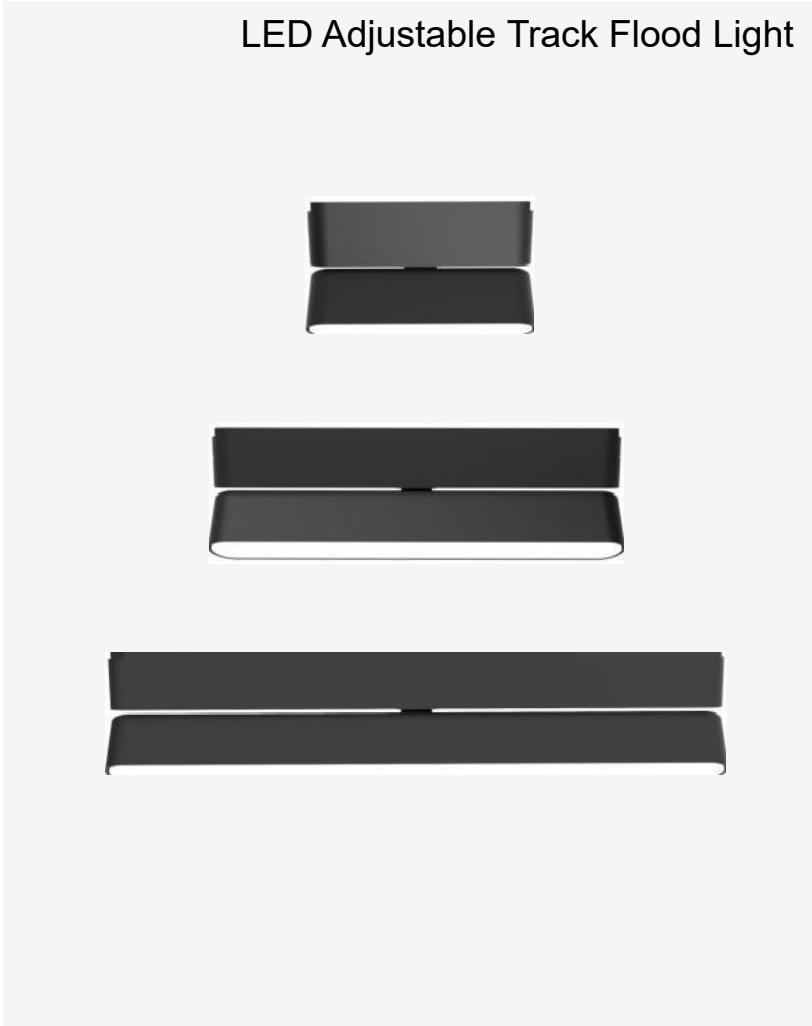


LED Adjustable Track Grille Light

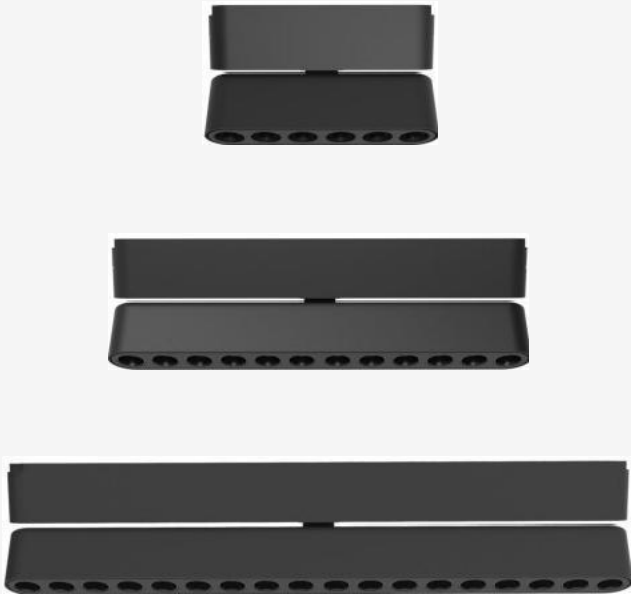

CRI > 90

CCT 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-GLRM6	Aluminum	40-48V	6W	575LM	24° / 36°	L114.5xW25×H64.5
LI-ET16R-GLRM12	Aluminum	40-48V	12W	1130LM	24° / 36°	L222.3xW25xH64.5
LI-ET16R-GLRM18	Aluminum	40-48V	16W	1435LM	24° / 36°	L330.3xW25xH64.5



CRI


> 90

CCT

3000K / 4000K / 5000K




Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-AGRM6	Aluminum	40-48V	6W	104LM	60°	L114.5xW25xH64.5
LI-ET16R-AGRM12	Aluminum	40-48V	12W	150LM	60°	L222.3xW25xH64.5
LI-ET16R-AGRM18	Aluminum	40-48V	16W	156LM	60°	L330.3xW25xH64.5



LED Adjustable Track Grille Light



LED Track Flood Light

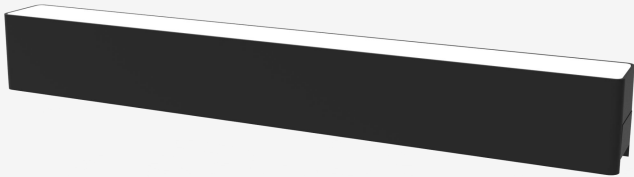

CRI > 90

CCT 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16S-FLS12	Aluminum	40-48V	12W	664LM	60°	L248xW25xH31.5
LI-ET16S-FLS18	Aluminum	40-48V	18W	921LM	60°	L370xW25xH64.5


CRI > 90

CCT 3000K / 4000K / 5000K



Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16S-GLS12	Aluminum	40-48V	12W	583LM	24° / 36°	L248xW25xH31.5
LI-ET16S-GLS18	Aluminum	40-48V	18W	1134LM	24° / 36°	L370xW25xH31.5

LED Track Grille Light

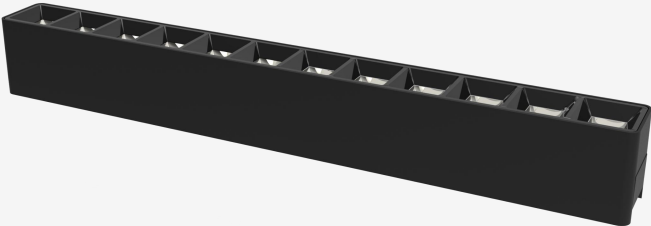

LED Track Grille Light



> 90



3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16S-LHS-6W	Aluminum	40-48V	6W	540LM	45°	L156.7xW30xH45.5
LI-ET16S-LHS-12W	Aluminum	40-48V	12W	910LM	45°	L313.5xW30xH45.5
LI-ET16S-LHS-18W	Aluminum	40-48V	18W	1200LM	45°	L470xW30xH45.5
LI-ET16S-LHS-24W	Aluminum	40-48V	24W	1600LM	45°	L627xW30xH45.5

CRI > 90

CCT 3000K / 4000K / 5000K



Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-B70A-10W	Aluminum	40-48V	10W	398LM	10° / 20° / 30°	L114.5xD70xH116.5
LI-ET16-B70B-10W	Aluminum	40-48V	10W	681LM	10° / 20° / 30°	L114.5×D70xH112
LI-ET16-B70C-10W	Aluminum	40-48V	10W	525LM	25°-65°	L114.5xD70xH123
LI-ET16-B70D-10W	Aluminum	40-48V	10W	820LM	25°-65°	L114.5xD70x120

LED Track Spotlight



LED Track Spotlight



CRI > 90

CCT 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-SL-5W	Aluminum	40-48V	5W	428LM	24° / 36° / 60°	L114.5xφ31xH101.5
LI-ET16R-SL-7W	Aluminum	40-48V	7W	567LM	24° / 36° / 60°	L114.5xφ31xH151.5
LI-ET16R-SL-12W	Aluminum	40-48V	12W	960LM	24° / 36° / 60°	L114.5xφ45xH137
LI-ET16R-SL-15W	Aluminum	40-48V	15W	1266LM	24° / 36° / 60°	L114.5xφ45xH177

CRI > 90

CCT 3000K / 4000K / 5000K



Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-SL-2x5W	Aluminum	40-48V	10W	825LM	24° / 36° / 60°	L114.5x31xH101.5
LI-ET16R-SL-2x7W	Aluminum	40-48V	14W	1092M	24° / 36° / 60°	L114.5x31xH152



LED Track Spotlight

LED Track Spotlight



CRI

> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-PST-8W	Aluminum	40-48V	8W	706LM	15° / 24° / 38° / 60°	L114.5xφ42xH139
LI-ET16R-PST-16W-LR	Aluminum	40-48V	16W	1446LM	15° / 24° / 38° / 60°	L114.5xφ42xH139
LI-ET16R-PST-16W-UD	Aluminum	40-48V	16W	1345LM	15° / 24° / 38° / 60°	L114.5xφ42xH247



LI-ET16R-PST-8W



LI-ET16R-PST-16W-LR



LI-ET16R-PST-16W-UD



CRI

> 90

CCT

3000K / 4000K / 5000K



Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-D70M-8W	Aluminum	40-48V	8W	694LM	10° / 20° / 30°	L 114.5xD70xH81.5
LI-ET16R-D90M-12W	Aluminum	40-48V	12W	917LM	10° / 20° / 30°	L 114.5xD90xH85





CRI

> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-D40-5W	Aluminum	40-48V	5W	400LM	24° / 36°	L114.5xD40xH74

CRI

> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-D80-10W	Aluminum	40-48V	10W	642LM	45°	L114.5xD80xH71.5
LI-ET16R-D80B-10W	Aluminum	40-48V	10W	370LM	45°	L114.5xD80xH71.5



LED Track Ball Light



CRI

> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-MOON80S-3W	Aluminum	40-48V	3W	250LM	360°	L114.5xD80xH113.5
LI-ET16R-MOON100S-5W	Aluminum	40-48V	5W	483LM	360°	L114.5xD100xH134.5
LI-ET16R-MOON120S-5W	Aluminum	40-48V	5W	462LM	360°	L114.5xD120xH155.5

CRI

> 90

CCT

3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-MOON80P-3W	Aluminum	40-48V	3W	252LM	360°	L114.5xD80xH1000
LI-ET16R-MOON100P-5W	Aluminum	40-48V	5W	493LM	360°	L114.5xD100xH1000
LI-ET16R-MOON120P-5W	Aluminum	40-48V	5W	478LM	360°	L114.5xD120xH1000

LED Track Pendant Ball Light



LED Track Ball Light



CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-BL	Aluminum	40-48V	10W	881LM	135°	L114.5xφ100xH131.5
LI-ET16R-BL2	Aluminum	40-48V	10W	853LM	135°	L114.5xφ100xH1000

CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-MBO-A	Aluminum	40-48V	12W	1049LM	24° / 36°	L114.5xφ100xH121.5
LI-ET16R-MBO-B	Aluminum	40-48V	12W	1019LM	24° / 36°	L114.5xφ100xH1000

LED Track Pendant Ball Light



LED Track Pendant Light



CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16R-FM-7W	Aluminum	40-48V	7W	720LM	24° / 36° / 60°	L114.5xφ32xH1000
LI-ET16R-FM-9W	Aluminum	40-48V	9W	835LM	24° / 36° / 60°	L114.5xφ50xH1000
LI-ET16R-FM-15W	Aluminum	40-48V	15W	1503LM	24° / 36° / 60°	L114.5xφ45xH1000


CRI > 90 **CCT** 3000K / 4000K / 5000K

Code No.	Material	Voltage	Power	Lumen	Beam Angle	Size (mm)
LI-ET16-D180B-7W	Aluminum	40-48V	7W	118LM	90°	D180x45


LED Track Ambient Light




ETSlim Series S16 Track & Accessories



LI-ET16
Surface 16.7X4.5mm
Black / White




LI-ET16-R5C
Embedded with Gypsum
Black / White




LI-ET16-R2C
Embedded with Ceiling Board
Black / White




LI-ET16-R4C
Embedded with Ceiling Board
Black / White



LI-ET16-SC
Suspension
Black / White



LI-ET16-T
Tee Connector
Black / White




LI-ET16-X
Four way connector
Black / White




LI-ET16-IN
Female connector
Black / White



LI-ET16-1
Straight connector
Black / White




LI-ET16-1
Right-angle connector
Black / White




LI-ET16
End cap
Black / White



LI-ET16-R2C-IN
Black / White




LI-ET16-R2C-T
Black / White



LI-ET16-R2C-X
Black / White



LI-ET16-R2C-outer corner
Black / White



LI-ET16-R2C corner
Black / White



LI-ET16-Three-way adapter
Black / White



LI-ET16-Four-way adapter
Black / White

ETSlim Series S16 Track & Accessories



LI-ET16-Input Module
Black / White



LI- ET16-Direct Module
Black / White




LI-ET16-Corner Module
Black / White



LI-ET16-PWS-RR-100W
40-48V Power Supply
Black



LI-ET16-PWS-RR-200W
40-48V Power Supply
White



LI-ET16
Skyline
Black / White



LI-ET16
Skyline Straight Connector
Black / White



LI-ET16
Skyline straight-through connector cable pack
Black / White

**5.5 MM WIDE
MAGNETIC
TRACK LIGHT**

NA Series S5

42-48V | 5MM


Beyond Light, To the Last Details..








Multiple Accessories Assemble Any Demand of Design

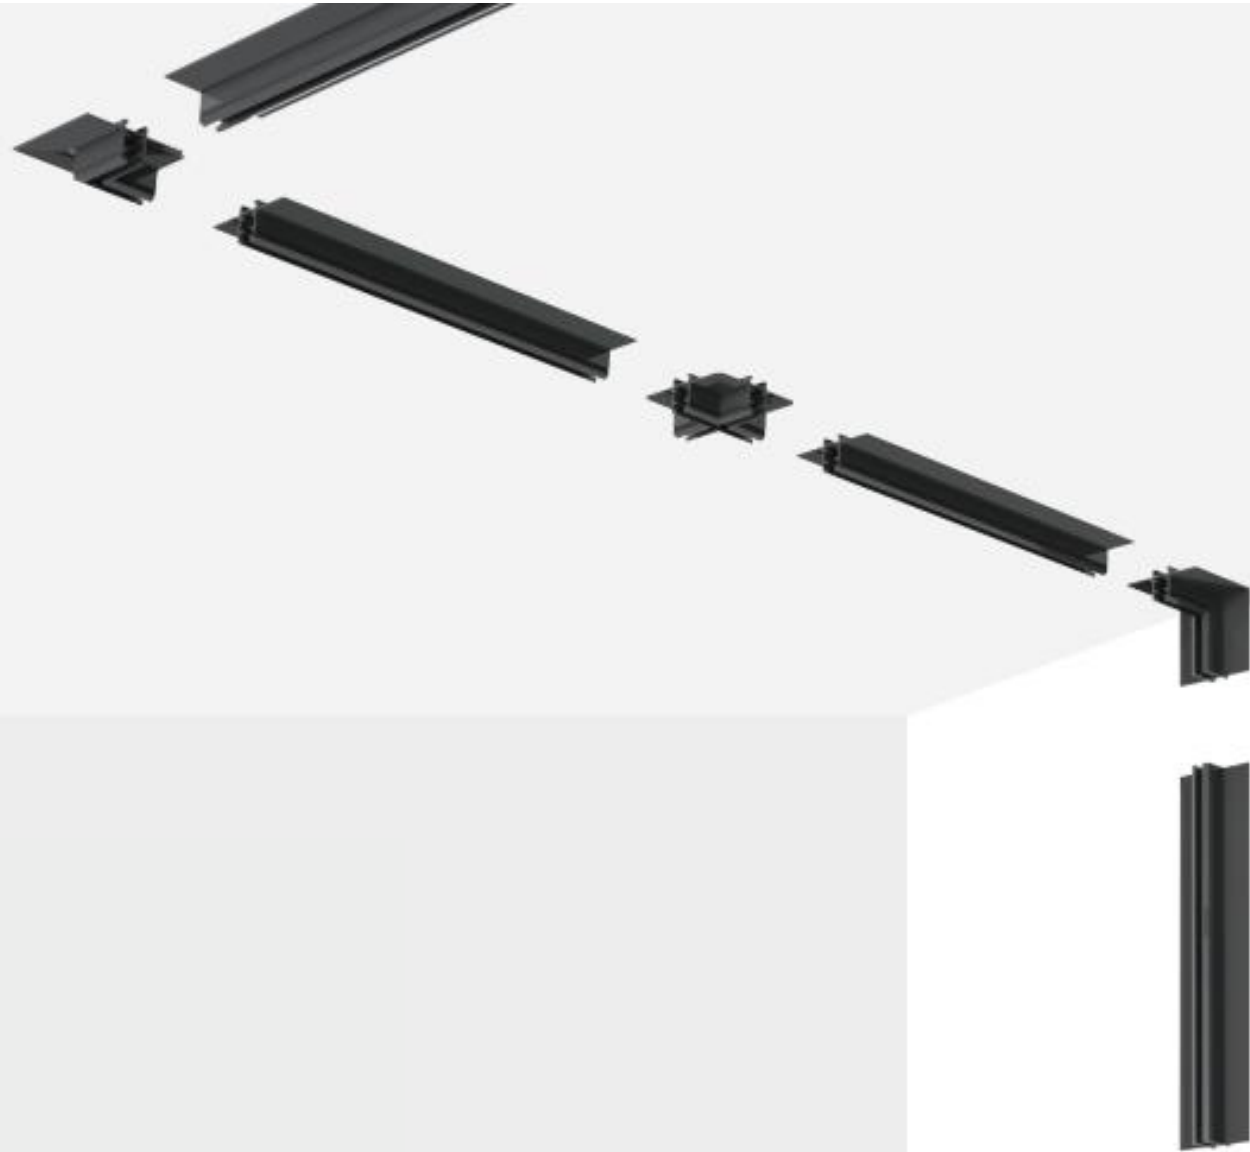





Low Voltage System
Microfiber design
Different kinds of applications
Wide range of accessories

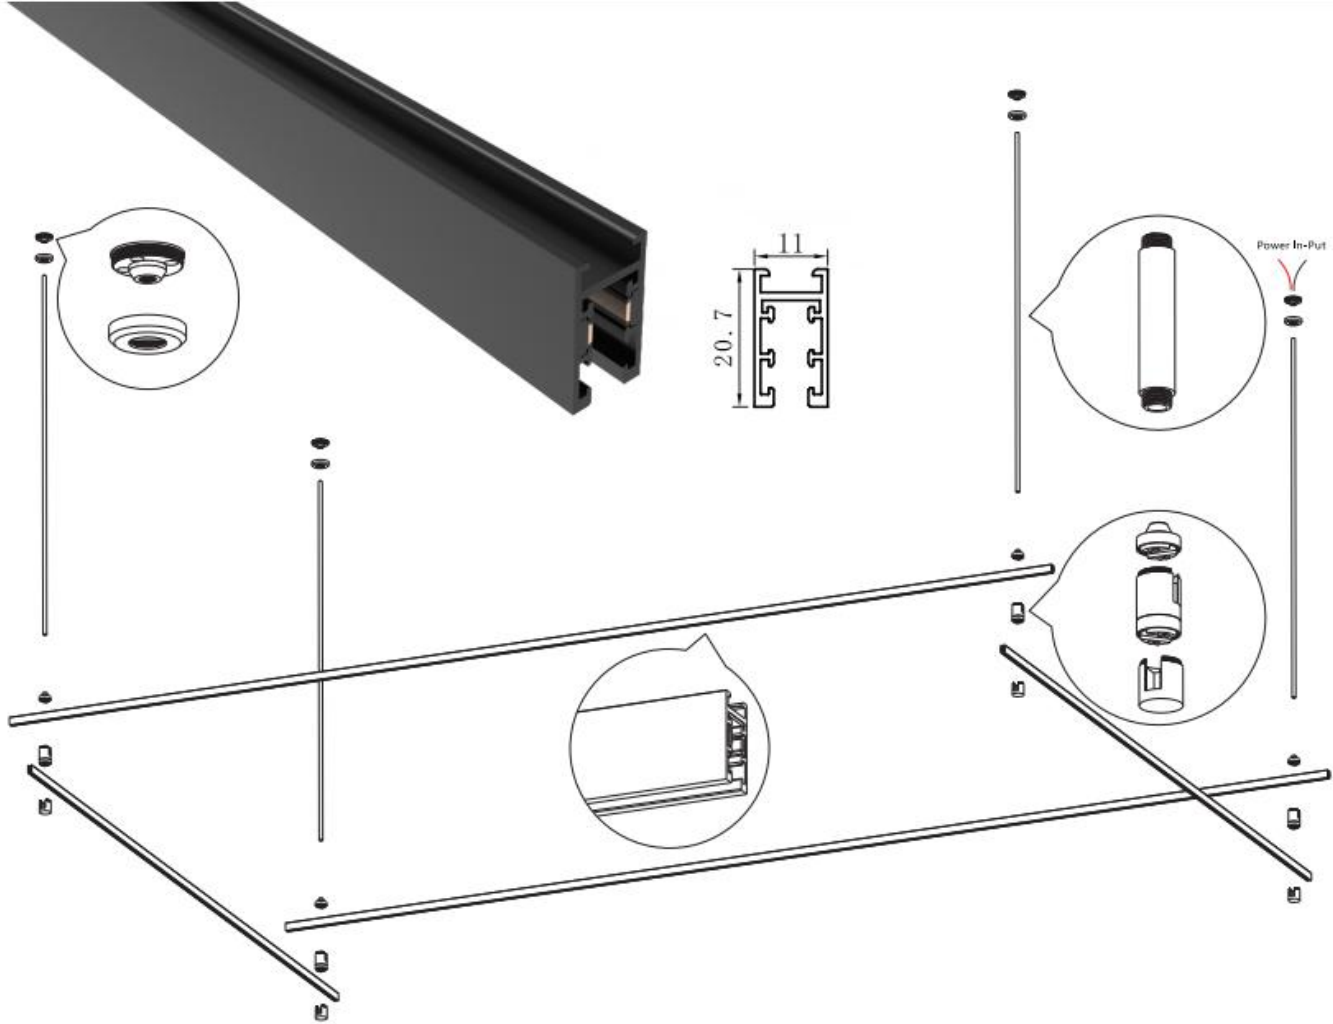

Shape Infinity: Connect Beyond Dimensions

The innovative multi-dimensional connector system (L/T/X/4D) achieves limitless configurations through electromechanical integration, enabling precision geometric structures, luminous art installations, and dynamic spatial adaptation. Its modular intelligent topology redefines design boundaries.


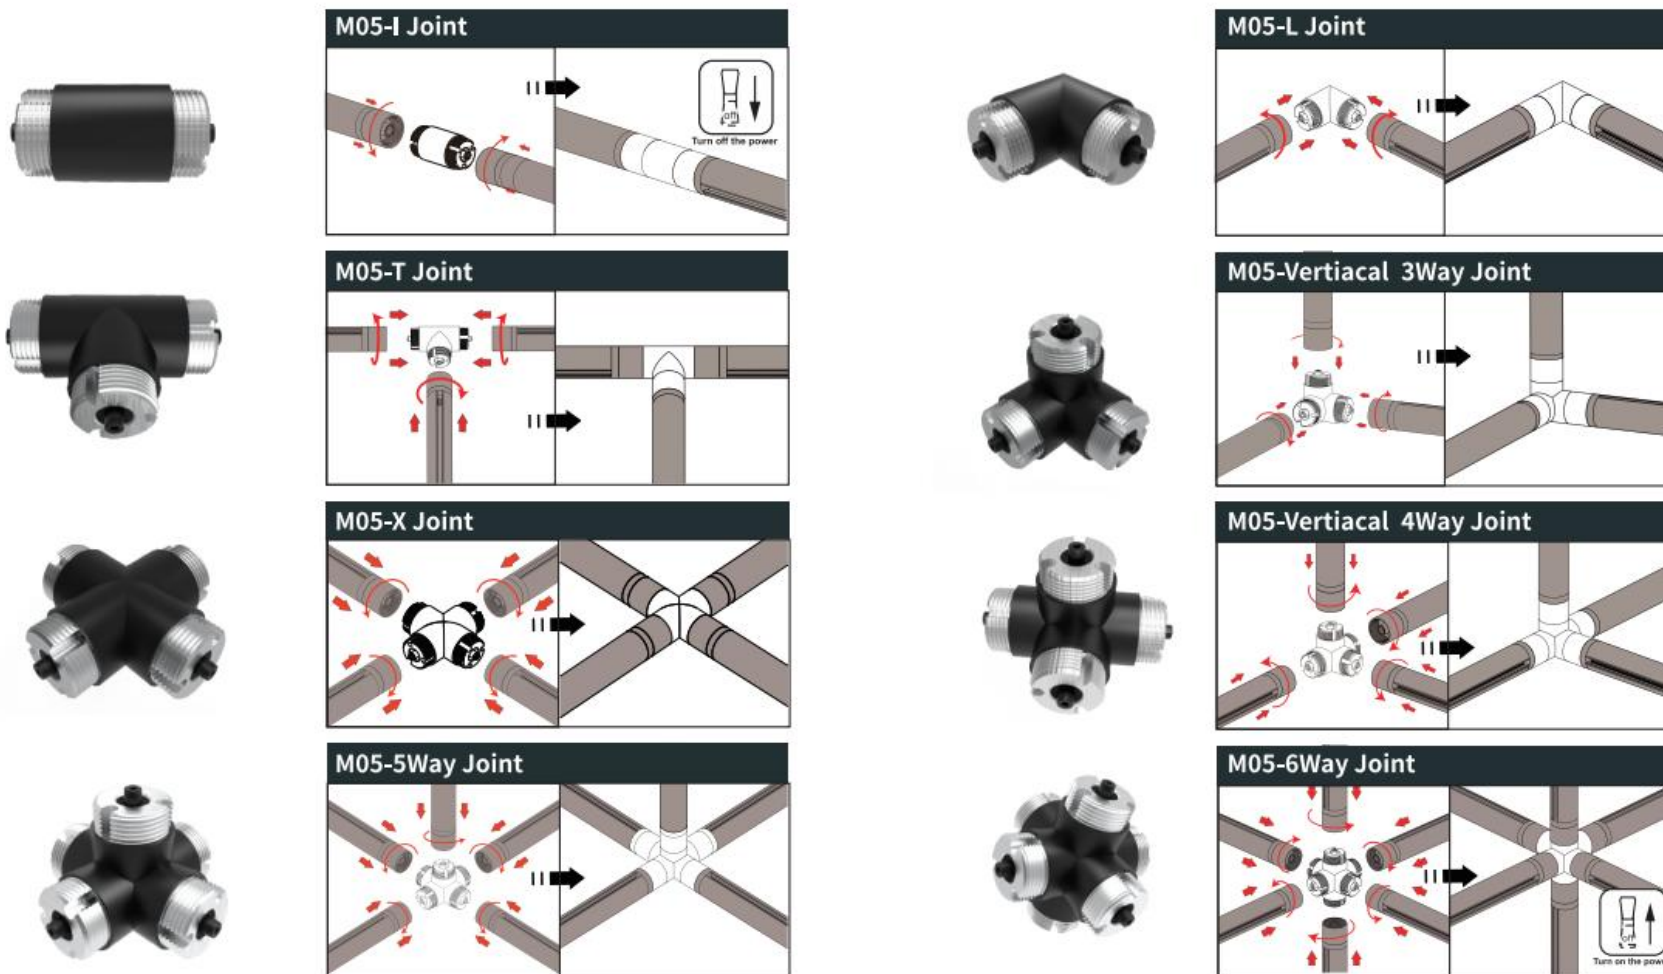


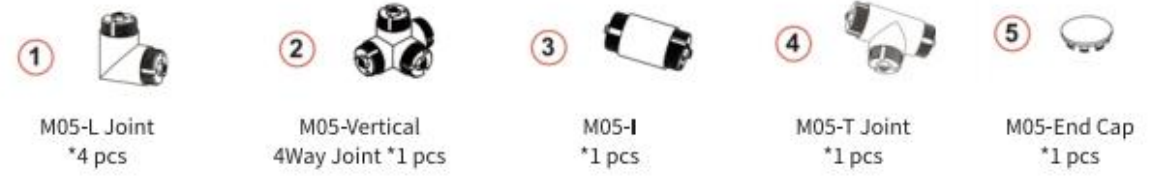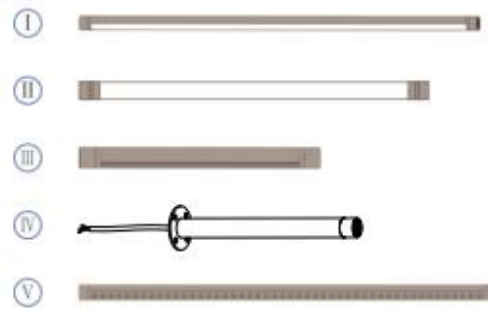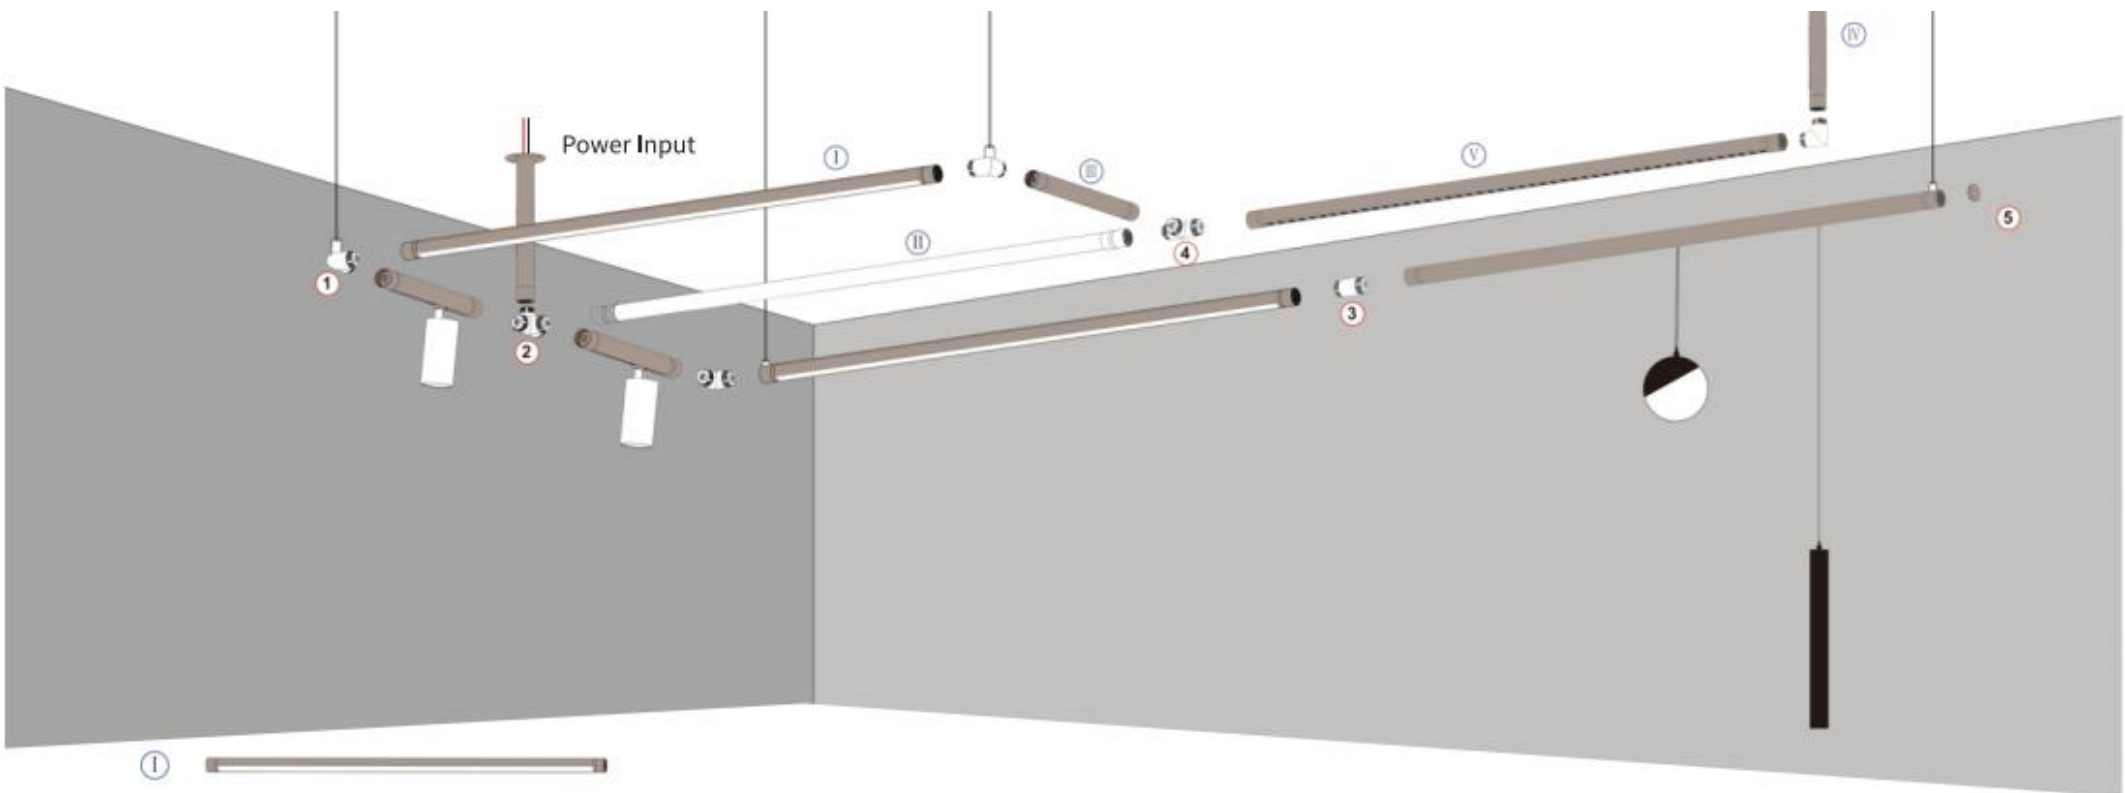





- | | | |
|---|---|-----------------------------|
| 1 |  | Holder-300 *1 pcs |
| 2 |  | Power Supply *1 pcs |
| 3 |  | Track *1pcs |
| 4 |  | A-Base *2 pcs |
| 5 |  | 3-Way Vertical Joint *2 pcs |
| 6 |  | Screws *12 pcs |
| 7 |  | Terminal Blocks *1 pcs |

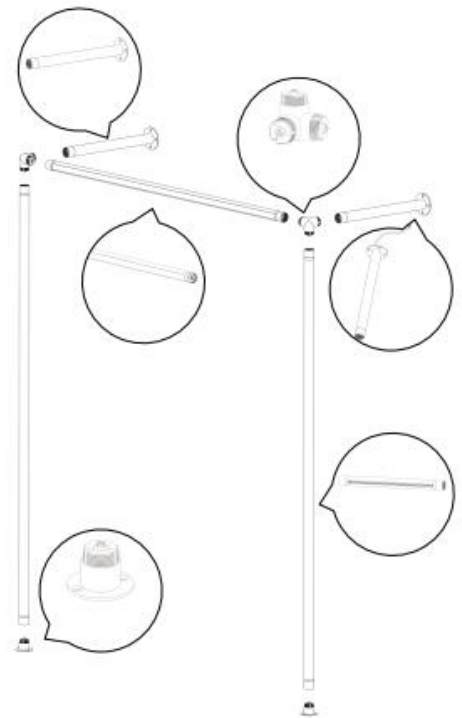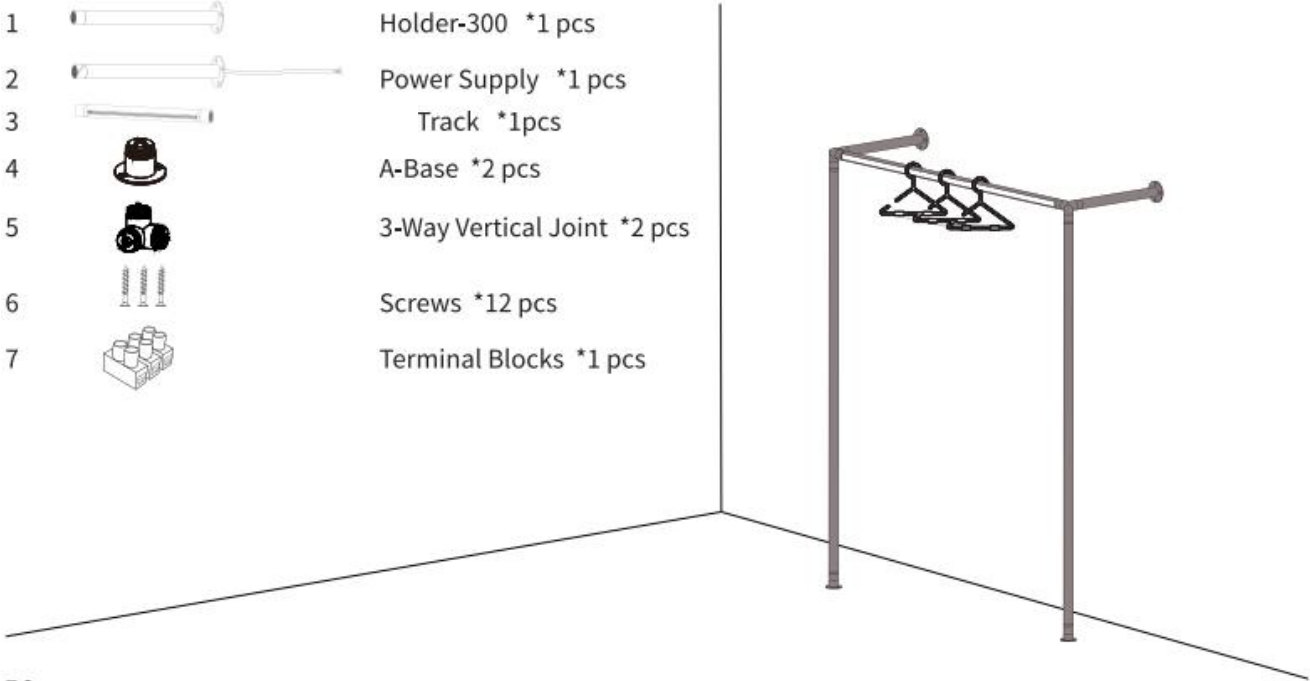

LED Track Tube Light



CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Dimension
LI-M05-SR-DFS300	48V	6W	L280.5*W26.5
LI-M05-SR-DFS500	48V	12W	L508.5*W26.5
LI-M05-SR-DFS800	48V	18W	L736.5*W26.5
LI-M05-SR-DFS1000	48V	24W	L964.5*W26.5
LI-M05-SR-DFS1200	48V	30W	L1192.5*W26.5

LED Track Tube Light

CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Dimension
LI-M05-SR-LB12	48V	6W	L280.5*W26.5
LI-M05-SR-LB24	48V	12W	L508.5*W26.5
LI-M05-SR-LB36	48V	18W	L736.5*W26.5
LI-M05-SR-LB48	48V	24W	L964.5*W26.5
LI-M05-SR-LB60	48V	30W	L1192.5*W26.5



LED Track Tube Light



CRI

> 90

CCT

3000K/400K/5000K

Code No.	Voltage	Power	Dimension
LI-M05-SR-TB300	48V	4W	L280.5*W26.5
LI-M05-SR-TB500	48V	8W	L508.5*W26.5
LI-M05-SR-TB800	48V	12W	L736.5*W26.5
LI-M05-SR-TB1000	48V	16W	L964.5*W26.5
LI-M05-SR-TB1200	48V	20W	L1192.5*W26.5

Code No.	Dimension
LI-M05-SR-O300	L280.5*W26.5
LI-M05-SR-O500	L508.5*W26.5
LI-M05-SR-O800	L736.5*W26.5
LI-M05-SR-O1000	L964.5*W26.5
LI-M05-SR-O1200	L1192.5*W26.5

LED Track Tube Light (Custom-length tubes)





Modular Mastery:
Connect Any Lamp, Scale Any Space




Code No.	Dimension
LI-S05-SR-300	L280.5*W26.5
LI-S05-SR-500	L508.5*W26.5
LI-S05-SR-800	L736.5*W26.5
LI-S05-SR-1000	L964.5*W26.5
LI-S05-SR-1200	L1192.5*W26.5

Track accessory

Code No.	Dimension
LI-S05-C Pole	Suspension Pole (Length:10/20/30/40/50/60/70/80/100CM) Adjustable Pole (Length:20~40/30~60/40~80/50~100CM)

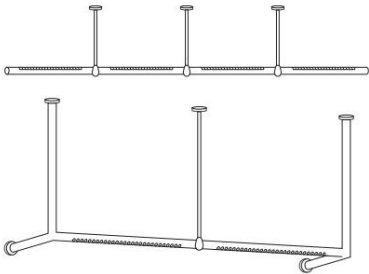


LED Track Ceiling Light

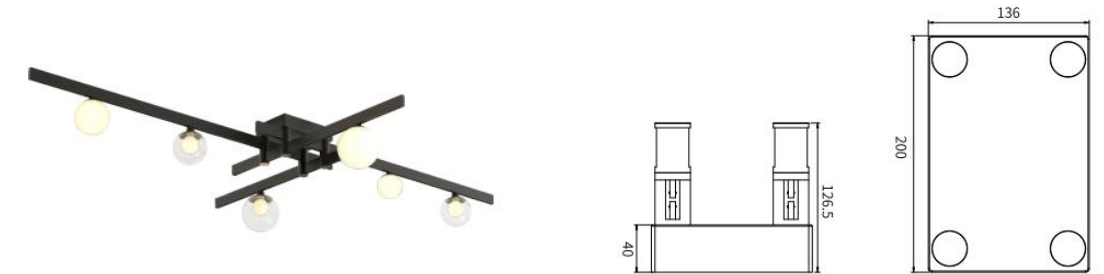

Code No.	Size (mm)
LI-Ceilinglamp-Base	L150*W250*H40



Smart Ceiling-Base System offers intelligent length adjustment (50/80/100cm) and 100+ modular lamps enabling designers to create customizable lighting solutions for multi-scene applications.

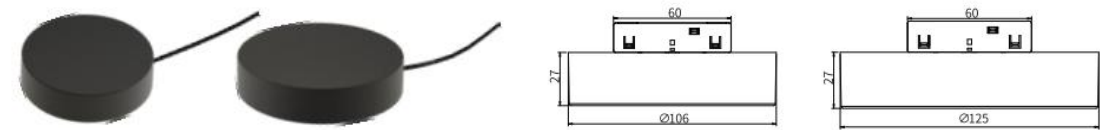

Code No.	Size (mm)
LI-M05-PWS-100W	W106*H27
LI-M05-PWS-200W	W125*H27



System Options

ON/OFF





CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-C300DF	48V	5W	100°	L302.5"W4.8"H15
LI-M05-C600DF	48V	10W	100°	L602.5"W4.8"H15

CRI > 90

CCT 3000K/3500K/4000K/5700K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-C42RB	48V	7W	60°	L300"W5"H15
LI-M05-C84RB	48V	14W	60°	L600"W5"H15



LED Track Flood Light



CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-FLS200	48V	7W	100°	L202.5*W11*H32
LI-M05-FLS300	48V	10W	100°	L302*W11*H32
LI-M05-FLS400	48V	14W	100°	L400*W11*H32
LI-M05-FLS600	48V	20W	100°	L598*W11*H32

CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-FLSF200	48V	7W	100°	L208*W11*H58
LI-M05-FLSF300	48V	10W	100°	L306*W11*H58

LED Track Flood Light



LED Track Flood Light



CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-FLR6	48V	6W	100°	L114.5*W25*H44
LI-M05-FLR12	48V	12W	100°	L222.5*W25*H44
LI-M05-FLR18	48V	15W	100°	L300*W25*H44

CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-FLRM6	48V	6W	100°	L114.5*W25*H77.5
LI-M05-FLRM12	48V	12W	100°	L222.5*W25*H77.5
LI-M05-FLRM18	48V	15W	100°	L330*W25*H77.5

LED Track Flood Light



LED Track Grille Light



CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-GLS12	48V	7W	40°	L202.5*W11*H32
LI-M05-GLS18	48V	10W	40°	L302*W11*H32
LI-M05-GLS24	48V	14W	40°	L400*W11*H32
LI-M05-GLS36	48V	20W	40°	L597.8*W11*H32

CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-GLSF12	48V	7W	40°	L208*W11*H58
LI-M05-GLSF18	48V	10W	40°	L306 W11*H58

LED Track Grille Light





CRI

> 90

CCT

3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-GLR6	48V	6W	24°/36°	L114.5*W25*H44
LI-M05-GLR12	48V	12W	24°/36°	L222.5*W25*H44
LI-M05-GLR18	48V	15W	24°/36°	L330*W25*H44

CRI

> 90

CCT

3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-GLRM6	48V	6W	24°/36°	L114.5*W25*H73
LI-M05-GLRM12	48V	12W	24°/36°	L222.5*W25*H73
LI-LI-M05-GLRM18	48V	15W	24°/36°	L330*W25*H73



LED Track Grille Light



CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-AGR6	48V	6W	60°	L114.5*W25*H44
LI-M05-AGR12	48V	12W	60°	L222.5*W25*H44
LI-M05-AGR18	48V	15W	60°	L330*W25*H44

CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-AGRM6	48V	6W	60°	L114.5*W25*H73
LI-M05-AGRM12	48V	12W	60°	L222.5*W25*H73
LI-M05-AGRM18	48V	15W	60°	L330*W25*H73

LED Track Grille Light



LED Track Spotlight



CRI > 90

CCT 3000K/400K/5000K


Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-SL-5W	48V	5W	24°/36°	Φ31*60*85
LI-M05-SL-7W	48V	7W	24°/36°	Φ31*60*135
LI-M05-SL-12W	48V	12W	24°/36°	Φ45*60*120
LI-M05-SL-15W	48V	15W	24°/36°	Φ45*60*160


CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-DL-3W	48V	3W	24°/36°/60°	L60*D31*H70
LI-M05-DL-7W	48V	7W	24°/36°/60°	L60*D45*H80

LED Track Spotlight

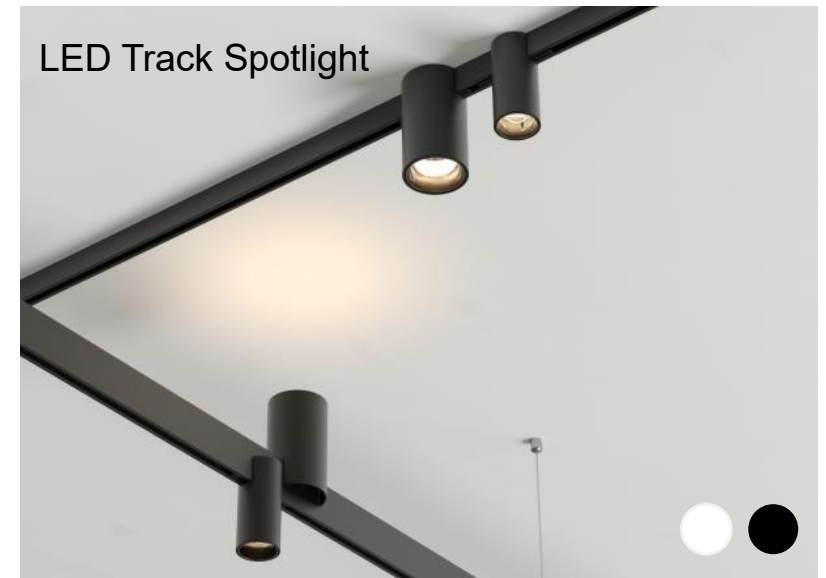

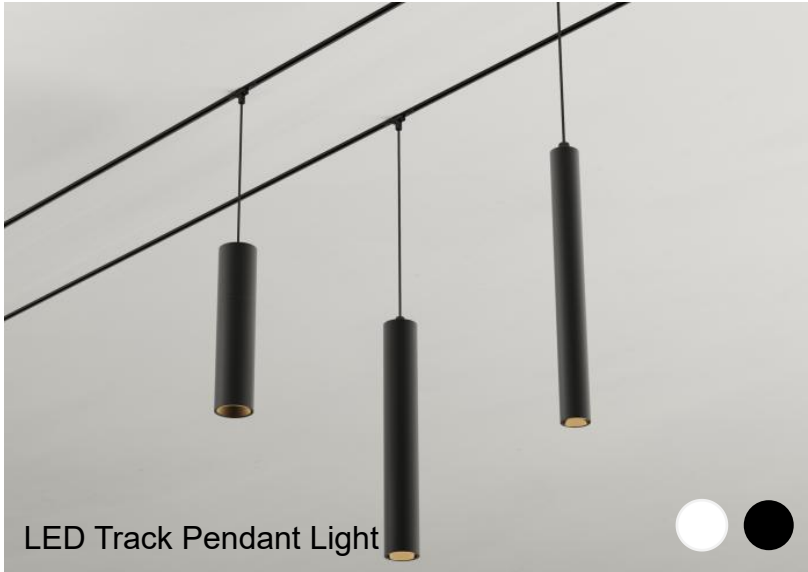

CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-FM-7W	48V	7W	24°/36°	Φ31*60*1000
LI-M05-FM-10W	48V	10W	24°/36°	Φ50*60*1000
LI-M05-FM-15W	48V	15W	24°/36°	Φ45*60*1000

CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-LHS6	48V	6W	180°	L156.7*W30*H44.2
LI-M05-LHS12	48V	12W	180°	L313.5*W30*H44.2
LI-M05-LHS18	48V	18W	180°	L470.2*W30*H44.2
LI-M05-LHS24	48V	24W	180°	L627*W30*H44.2





LED Track Spotlight

CRI > 90 **CCT** 3000K/400K/5000K



LI-M05-S40



LI-M05-S40A



LI-M05-S50



LI-M05-AP50

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-S40-3W	48V	3W	24°	L60*W37*H60
LI-M05-S40A-3W	48V	3W	24°	L60*W37*H60
LI-M05-S50-3W	48V	3W	24°	L60*W50*H80
LI-M05-AP50-3W	48V	3W	24°	L60*D50*H50

CRI > 90 **CCT** 3000K/400K/5000K



LI-M05-HM-D70C



LI-M05-D40-5W

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-HM-D70C-7W	48V	7W	24°/36°	L60*D70*H89.7
LI-M05-D40-5W	48V	5W	24°/36°	L60*D40*H63



LED Track Spotlight

LED Track Spotlight



CRI > 90 **CCT** 3000K/400K/5000K



Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-B70A	48V	10W	10°/20°/30°	L60*D70*H105
LI-M05-B70B	48V	10W	10°/20°/30°	L60*D70*H109
LI-M05-B70C	48V	10W	25°-65°	L60*D70*H112
LI-M05--B70A	48V	10W	25°-65°	L60*D70*H108

CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-D70M-7W	48V	7W	20°/30°	L60*D70*H65
LI-M05-D90M-12W	48V	12W	20°/30°	L60*D90*H65

LED Track Spotlight





> 90



3000K/400K/5000K



LI-M05-D80



LI-M05-D80B

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-D80	48V	10W	60°	D80*H55
LI-M05-D80B	48V	10W	60°	D80*H55



> 90



3000K/400K/5000K



LI-M05-D70B



LI-M05-D70C



LI-M05-D70S



LI-M05-D70P

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-D70B-7W	48V	7W	24°/36°/50°	D70*H62.6
LI-M05-D70C-7W	48V	7W	24°/36°/50°	D70*H62.6
LI-M05-D70S-7W	48V	7W	24°/36°/50°	D70*H62.6
LI-M05-D70P-7W	48V	7W	24°/36°/50°	D70*H65



LED Track Spotlight



CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-D90F-10W	48V	10W	180°	D90*H45
LI-M05-D200F-20W	48V	20W	180°	D200*H45

CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-HD-12W	48V	12W	24°/36°	L60*W50*H143

LED Track Spotlight





LED Track Ball Light

CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-SUN80S-3W	48V	3W	360°	L60*D80*H105
LI-M05-SUN100S-5W	48V	5W	360°	L60*D100*H125
LI-M05-SUN120S-5W	48V	5W	360°	L60*D120*H145

CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-MOON80S-3W	48V	3W	360°	L60*D80*H97
LI-M05-MOON100S-5W	48V	5W	360°	L60*D100*H118
LI-M05-MOON120S-5W	48V	5W	360°	L60*D120*H139.5

LED Track Ball Light



LED Flexible Strip Light



CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-flexible strip500	48V	6W	100°	L563*W5*H15
LI-M05-flexible strip1000	48V	12W	100°	L1063*W5*H15
LI-M05-flexible strip2000	48V	20W	100°	L2063*W5*H15

CRI > 90

CCT 3000K/400K/5000K

Code No.	Voltage	Power	Dimension
LI-M05-D180B-7W	48V	7W	L60*D180*H34

LED Track Ambient Light



LED Track Pendant Light



CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-MBO-B	48V	12W	24°/36°	L60*D100*H1000

CRI > 90 **CCT** 3000K/400K/5000K

Code No.	Voltage	Power	Beam Angle	Dimension
LI-M05-OC70P-10W	48V	10W	24°	L60*D70*H1000

LED Track Pendant Light



NA Series S5 Track & Accessories



LI-S05-1
Suspend Track



LI-S05-1-R300
Curved Track



LI-S05-1-R600
Curved Track



LI-S05-1
IN Corner



LI-S05-1
T Corner



LI-S05-1
X Corner



LI-S05-1
Surface mounted buckle



LI-S05-1
outer corner



LI-S05-1
L Corner



LI-S05-2
Susperd Track



LI-S05-2
T Corner



LI-S05-2
X Corner



LI-S05-2
L Corner

NA Series S5 Track & Accessories



LI-R05-2
Embedded Track



LI-R05-2-R300
Curved Track



LI-R05-2-R600
Curved Track



LI-M05-R2
IN Corner



LI-R05-2
T Corner




LI-R05-2
X Corner



LI-R05-2
outer corner



LI-R05-2
L Corner



LI-R05-5
Embedded Track



LI-R05-5-R300
Curved Track



LI-R05-5-R600
Curved Track



LI-R05-5
IN Corner



LI-R05-5
T Corner



LI-R05-5
X Corner



LI-R05-5
outer corner



LI-R05-5
L corner



LI-M05
80W



LI-M05
I Link

**LED MAGNETIC
TRACK LIGHT**

TP10 Series

24V/48V | 19.4MM

Beyond Light, To the Last Details..





Lens

Unique focus lens
Highly efficient and architecturally integrated
Different beam angles



Medium

Narrow

Reflector

The structure of complex surface facets and the highest surface quality allow perfect beam control and optimal colour mixing.



Medium

Wide

Narrow

Modular

the precisely designed reflectors enable different beam angles in the same type of luminaire with similar appearance.



LIN-S01-10
Surface mounted track




LIN-S02-10
Concealed track




LIN-S03-10
Open installation/lifting track



LIN-S04-10
Circular single-sided track

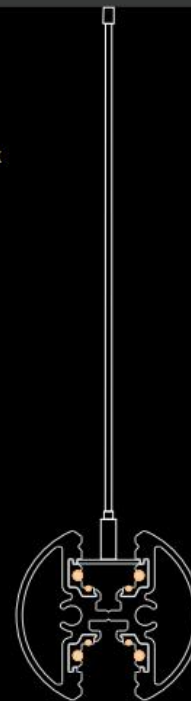

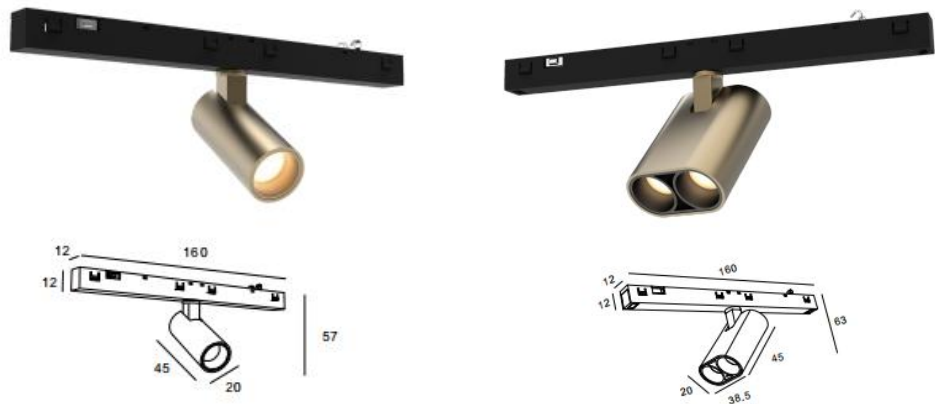


CRI

> 90


CCT

3000K/3500K/4000K/5700K

Code No.	Voltage	Power	Color	Beam Angle
LI-L2045-1T	24/48V	2W	Copper/Silver	24°/36°
LI-L3820-2T	24/48V	4W	Copper/Silver	24°/36°

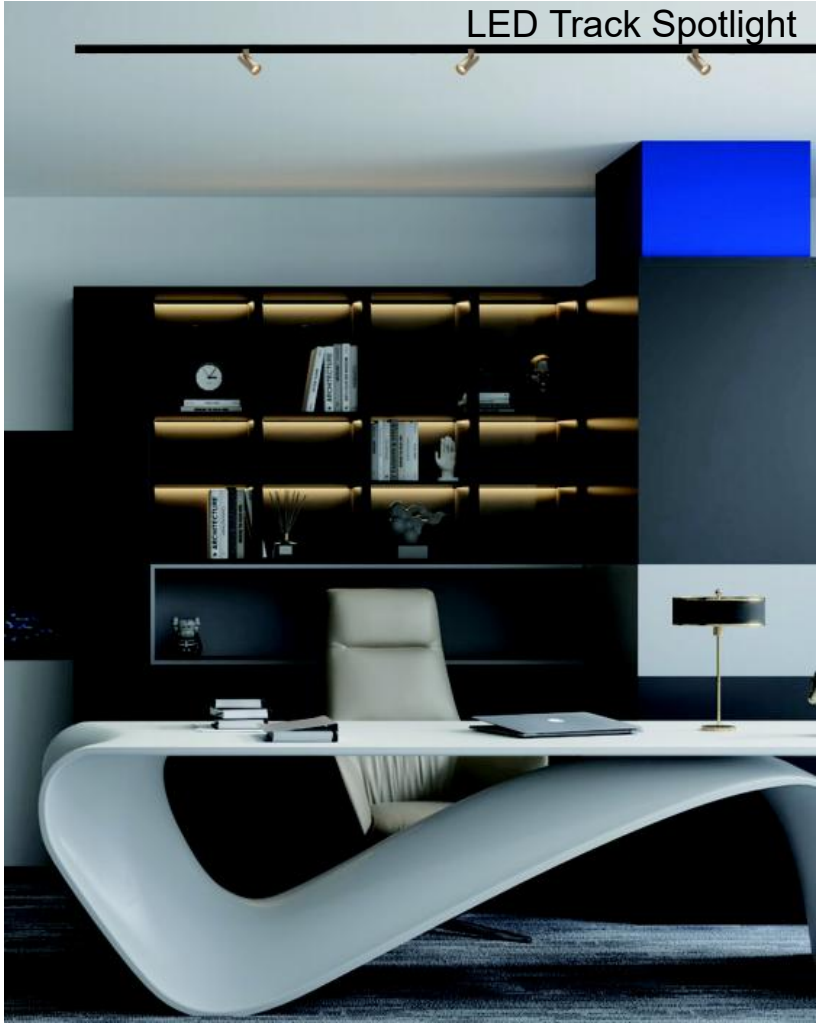


LED Track Spotlight

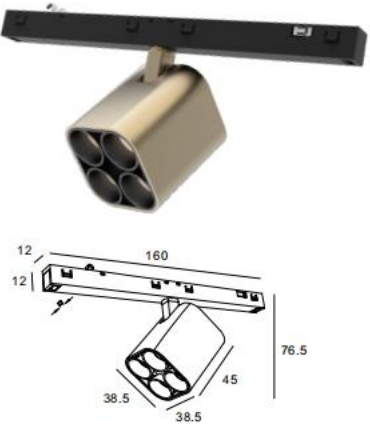

CRI > 90 **CCT** 3000K/3500K/4000K/5700K

Code No.	Voltage	Power	Color	Beam Angle
LI-L3838-4T	24/48V	7W	Copper/Silver	24°/36°
LI-L9520-5T	24/48V	10W	Copper/Silver	24°/36°

LED Track Spotlight



> 90



3000K/3500K/4000K/5700K

Code No.	Voltage	Power	Color	Beam Angle
LI-L2045-1TR	24/48V	2W	Gold/Silver	24°/36°

LED Track Spotlight




> 90




3000K/3500K/4000K/5700K

Code No.	Voltage	Power	Color	Beam Angle
LI-L3820-2TR	24/48V	4W	Gold/Silver	24°/36°



LED Track Spotlight

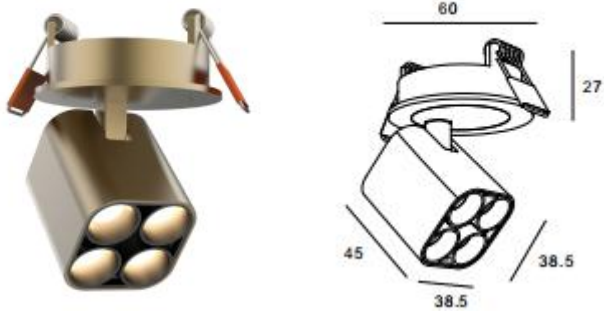


CRI > 90 **CCT** 3000K/3500K/4000K/5700K

Code No.	Voltage	Power	Color	Beam Angle
LI-L3838-4TR	24/48V	8W	Gold/Silver	24°/36°

LED Track Spotlight

CRI > 90 **CCT** 3000K/3500K/4000K/5700K

Code No.	Voltage	Power	Color	Beam Angle
LI-L9520-5TR	24/48V	11W	Gold/Silver	24°/36°

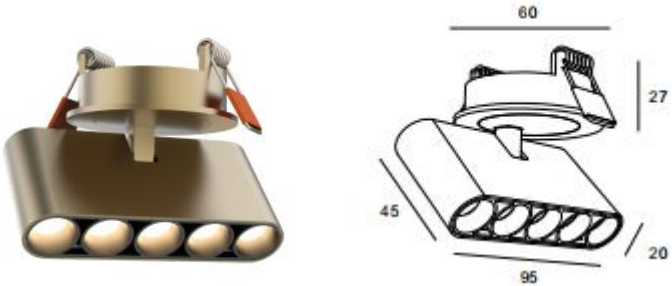


LED Track Grille Light



CRI > 90

V 24/48V

Code No.	CCT	Power	Color	Beam Angle
LI-LNGL150-14T	3000K/3500K/4000K/5700K	3W/6W/9W/12W	Copper/Silver/Black	24°/36°
LI-LNGL150-14T	3000K/3500K/4000K	3W/6W/9W/12W	Copper/Silver/Black	24°/36°

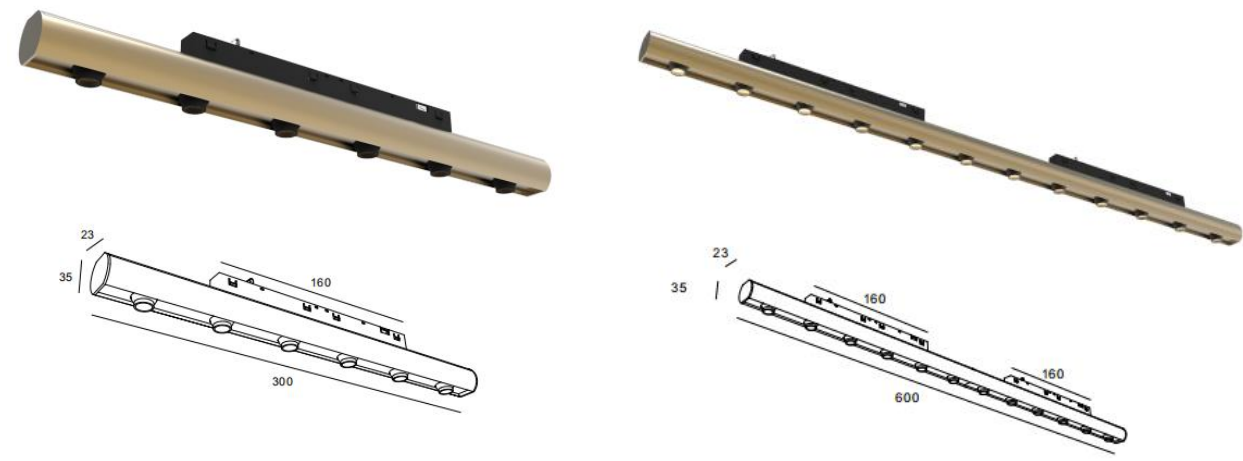

> 90





24/48V

Code No.	CCT	Power	Color	Beam Angle
LI-LNGL-6T	3000K/3500K/4000K/5700K	10W	Copper/Silver	24°/36°
LI-LNGL-12T	3000K/3500K/4000K	20W	Copper/Silver	24°/36°

LED Track Grille Light



LED Track Flood Light

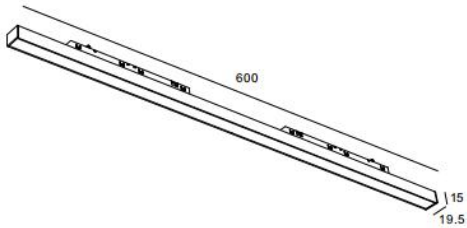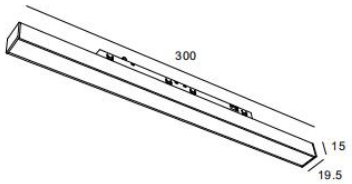

CRI > 90


V 24/48V

Code No.	CCT	Power	Color	Beam Angle
LI-LNFL300	3000K/3500K/4000K/5700K	10W	Copper/Silver	110°
LI-LNFL600	3000K/3500K/4000K	20W	Copper/Silver	110°



CRI > 90 **V** 24/48V

Code No.	CCT	Power	Color	Beam Angle
LI-LNGL-6T	3000K/3500K/4000K/5700K	3W	Copper/Silver	180°
LI-L10010DT	3000K/3500K/4000K	3W	Copper/Silver	24°/36°

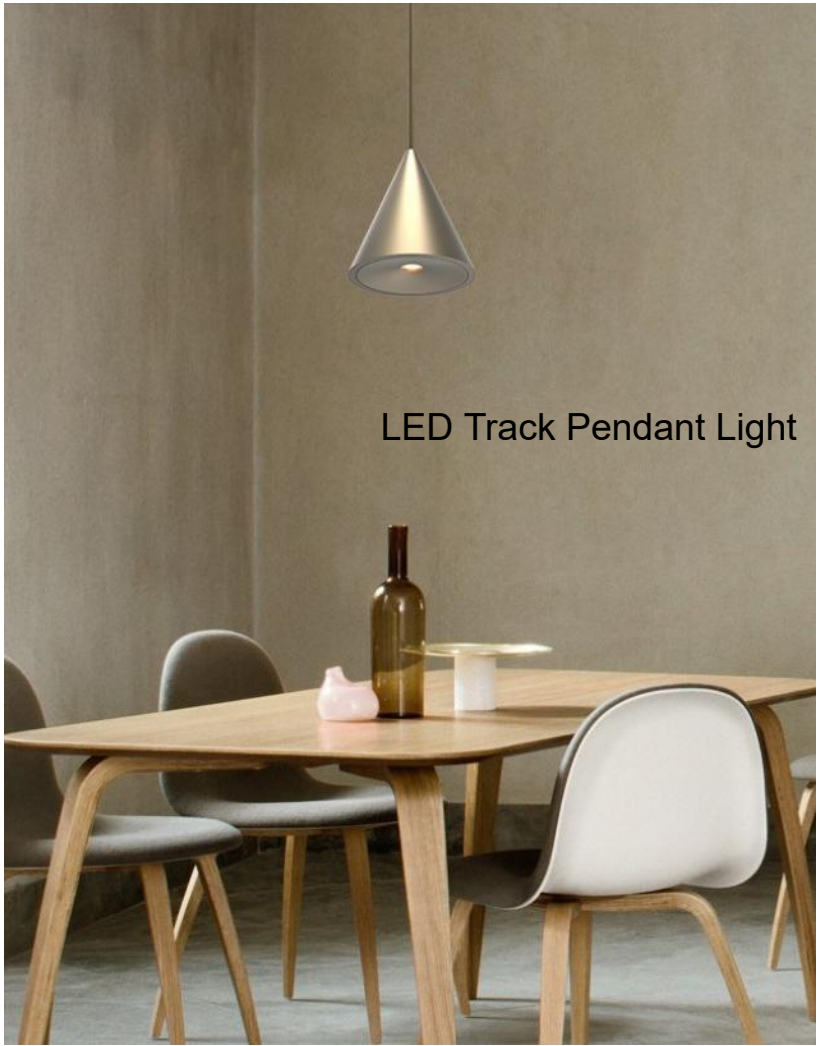

LED Track Pendant Light

TP10 Series Track & Accessories



LIN-S01-10
Surface mounted track
W19.4*H15.3mm
L500/1000/2000/3000mm
Black/White



LIN-S04-10
Surface mounted track
W25.6*H20.8mm
L500/1000/2000/3000mm
Black/White



LIN-S02-10
Concealed track
W49*H15mm
L500/1000/2000/3000mm
Black/White



LIN-S03-10
Open installation/Lifting
W19*H23mm
L500/1000/2000/3000mm
Black/White



LIN-S01-10
Lifting double-sided
W35.5*H31.7mm
L500/1000/2000/3000mm
Black/White



Dust_x0001_cover



Surface/concealed
track plugs



Circular single-sided
track plug



Rail lifting accessories

**ULTRA THIN
MAGNETIC
TRACK LIGHT**

TP15 Series

24V/48V | 19MM

Beyond Light, To the Last Details..



illus
ILLUMINATION



Applicable for homes, commercial spaces, museums, hotels, exhibition halls, boutiques, and other indoor environments.

Human-centered design with adjustable angles, precise focusing, and efficient heat dissipation.


Delivers pure, soft light using high-brightness COB chips with low light decay and stable, long-lasting performance.

Flicker-free power ensures eye comfort and visual health.

Easy installation and optimized modular structure allow flexible combinations.

Luminaires can be manually repositioned to adapt to various scenes.

LED Track Spotlight

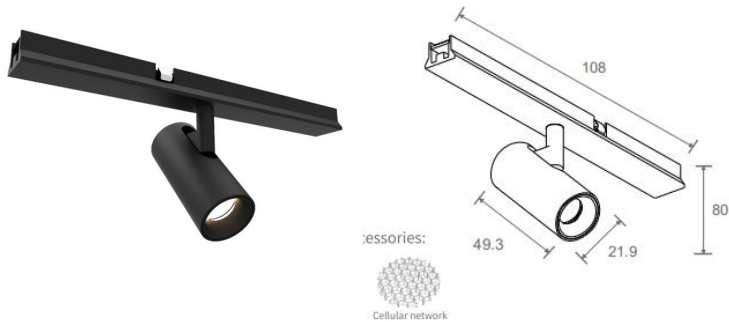


CRI > 90 **CCT** 3000K/3500K/4000K

Code No.	Voltage	Power	Color	Beam Angle
LI-NMN-2248	24/48V	3W	Black/White	24°/36°


LED Track Spotlight

CRI > 90 **CCT** 3000K/3500K/4000K

Code No.	Voltage	Power	Color	Beam Angle
LI-NMN-3055	24/48V	5W	Black/White	15°/24°/36°

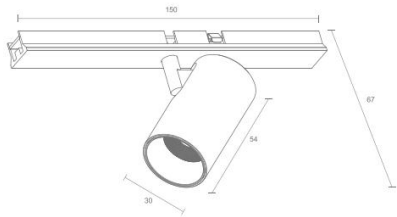


LED Track Grille Light



CRI > 90

V 24/48V

Code No.	CCT	Power	Color	Beam Angle
LI-NMN-06300	3000K/3500K/4000K	4W	Black/White	36°/48°/60°

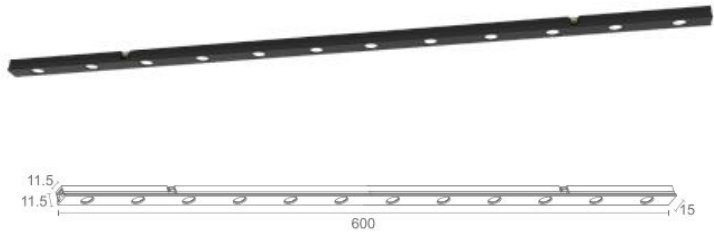

CRI

> 90

V


24/48V

Code No.	CCT	Power	Color	Beam Angle
LI-NMN-12600	3000K/3500K/4000K	8W	Black/White	36°/48°/60°

LED Track Grille Light



LED Track Grille Light




CRI > 90 **CCT** 3000K/3500K/4000K

Code No.	Voltage	Power	Color	Beam Angle
LI-NMN-12600-A	24/48V	8W	Black/White	36°/48°/60°


CRI > 90 **CCT** 3000K/3500K/4000K

Code No.	Voltage	Power	Color	Beam Angle
LI-NMN-06300-A	24/48V	4W	Black/White	36°/48°/60°

LED Track Grille Light



LED Track Flood Light

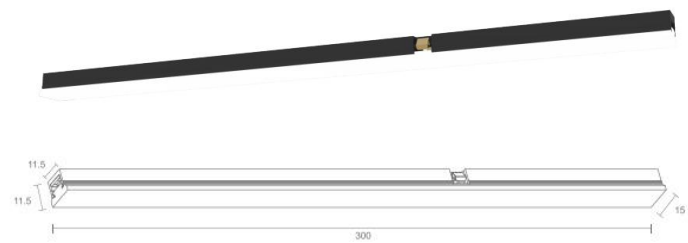


CRI > 90 **CCT** 3000K/3500K/4000K


Code No.	Voltage	Power	Color
LI-NMN-48300	24/48V	6W	Black/White

CRI > 90 **CCT** 3000K/3500K/4000K

Code No.	Voltage	Power	Color
LI-NMN-96600	24/48V	12W	Black/White

LED Track Flood Light

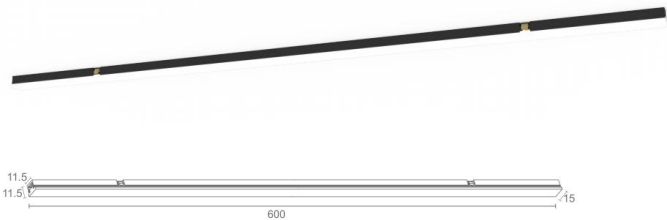



CRI > 90

V 24/48V

Code No.	CCT	Power	Color
LI-NMN-0480	3000K/3500K/4000K	3W	Black/White



CRI

> 90

V

24/48V

Code No.	CCT	Power	Color
LI-NMN-40100	3000K/3500K/4000K	3W	Gun black/Nickel

LED Track Pendant Light



LED Track Tilttable Grille Light



CRI > 90

V 24/48V

Code No.	CCT	Power	Color
LI-NMN-12233R	3000K/3500K/4000K	10W	Black/White

LED Track Tilttable Grille Light



CRI > 90 **CCT** 3000K/3500K/4000K

Code No.	Voltage	Power	Color
LI-NMN-05125R	24/48V	5W	Black/White

CRI > 90 **CCT** 3000K/3500K/4000K

Code No.	Voltage	Power	Color
LI-NMN-54300R	24/48V	7W	Black/White

LED Track Tilttable Flood Light



TP15 Series Track & Accessories



LI-NMN-A001
Surface mounted
W19*H13.5mm
L500/1000/2000/3000mm
24V/48V



LI- NMN-B001
Recessed
W39*H13.5mm
L500/1000/2000/3000mm
24V/48V



LI-NMN-C001
Suspension
φ30mm
L500/1000/2000/3000mm
24V/48V



LI-NMN-E001
Suspension
φ28mm
L500/1000/2000/3000mm
24V/48V



LI-NMN-D001
Pre-bury
W39*H13.5mm
L500/1000/2000/3000mm
24V/48V



Dust cover



Circular double-sided
track plug



Circular single-sided
track plug



Rail lifting
accessories


**LED MAGNETIC
TRACK LIGHT**

TP204 Series

24V/36V/48V | 20MM

Beyond Light, To the Last Details..




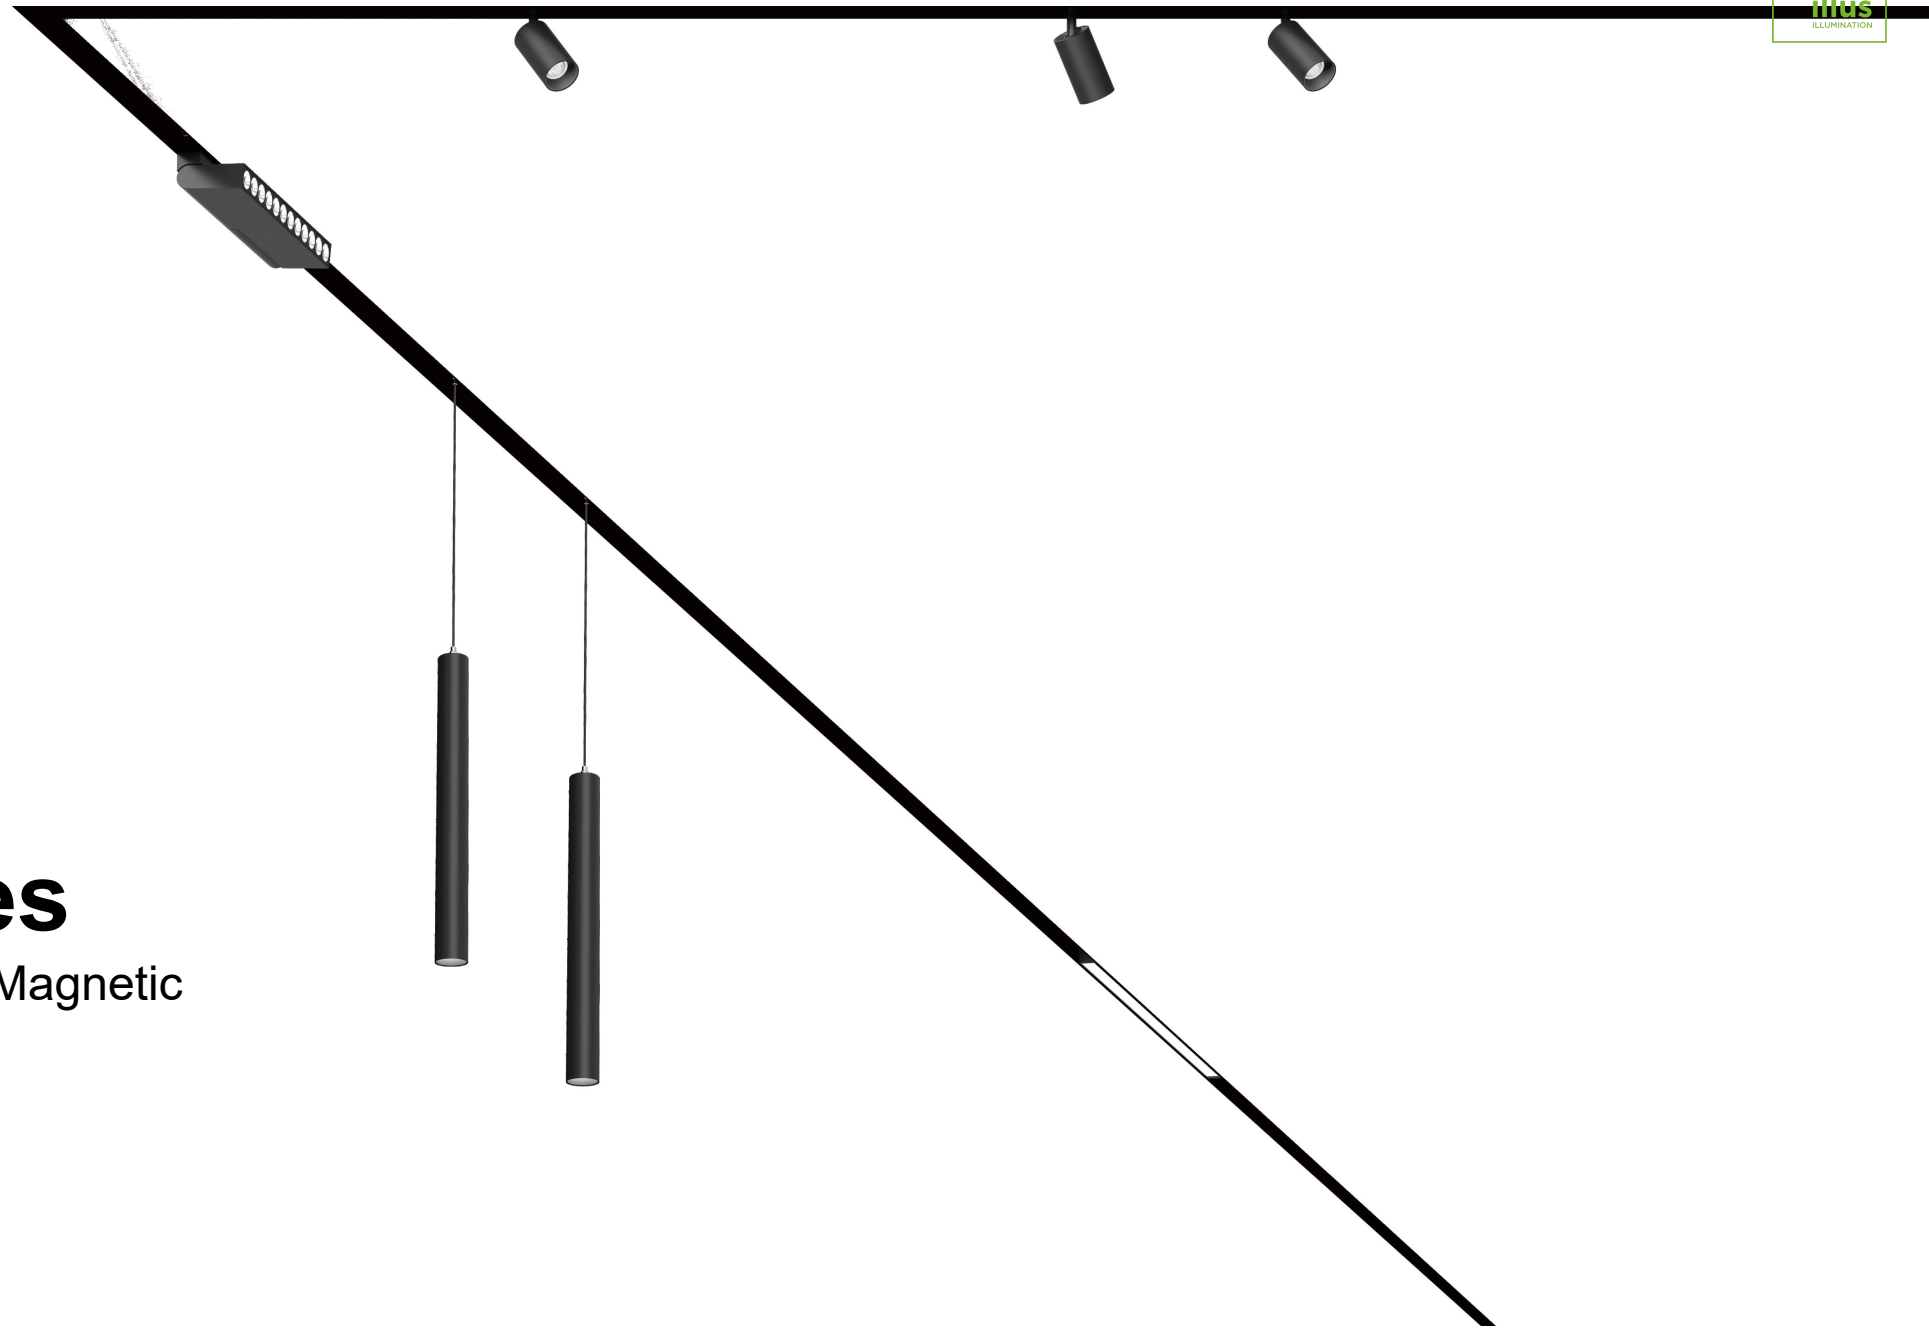

T20 Series

Narrow Integrated Magnetic
Track Linear Light


Round Corner Track

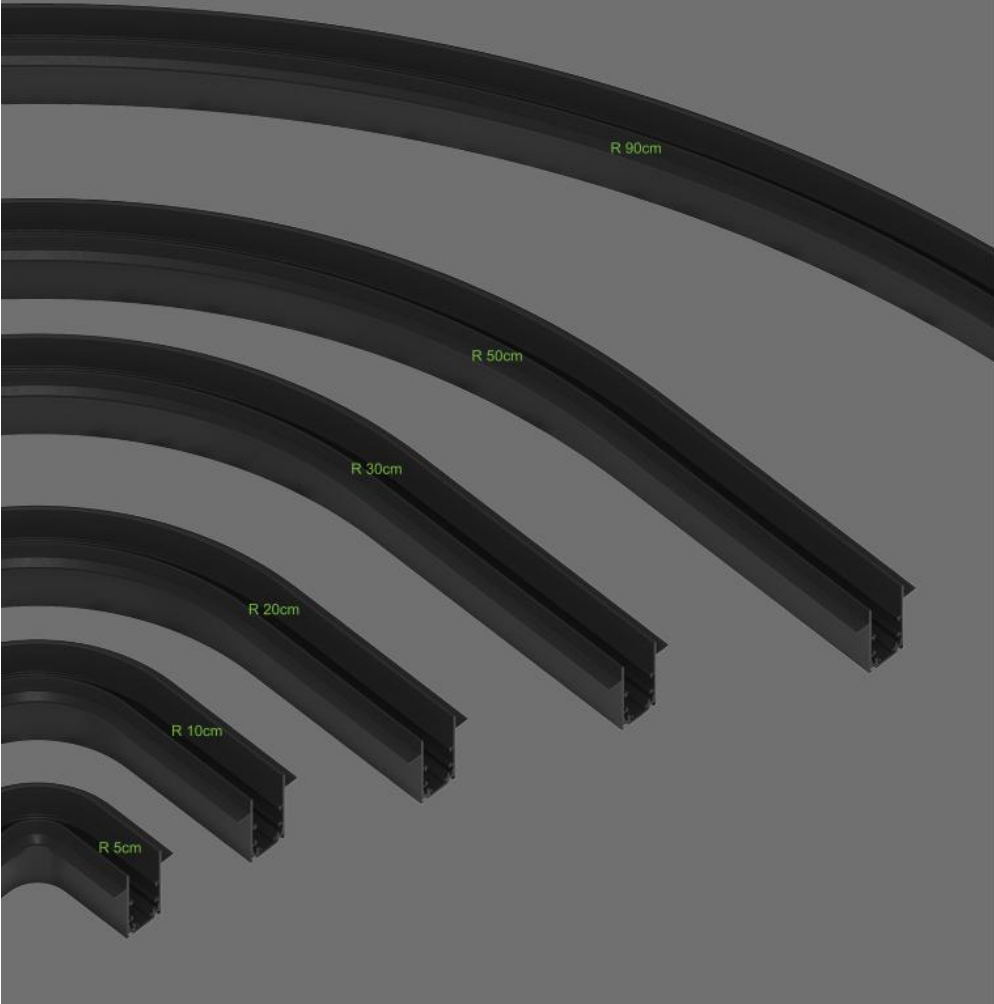


Curved Drivers And Fixtures



Fitting tracks

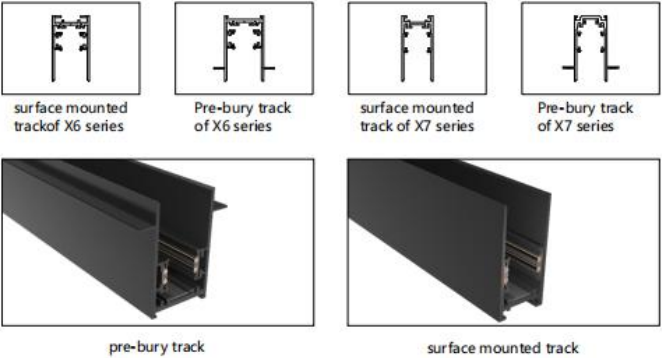


Installation







Round magnetic track are available in different sizes
free combination, Variety of shapes
different installation way according to the installation environment and personal needs




Round track combination
 Sizes of diameter D: 60cm, 90cm, 120cm, 200cm, 250cm, 300cm, 350cm.

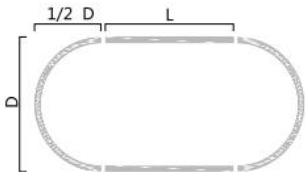

Runway type track combination
 Sizes of diameter D: 60cm, 90cm, 120cm, 200cm, 250cm, 300cm, 350cm.

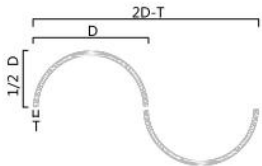

Semicircular track combination
 Sizes of diameter D: 60cm, 90cm, 120cm, 200cm, 250cm, 300cm, 350cm.




90 degree arc track combination
 Sizes of diameter D: 60cm, 90cm, 120cm, 200cm, 250cm, 300cm, 350cm.

Shape Instance can be more shapes





Track System

LI-NSH-N surface mounted track



Input Voltage: 24/36/48vdc 50/60Hz
 Color: Black
 Ip Grade: Ip20
 Temperature: -20°C-50°C

LI-NEH-A recessed track



Input Voltage: 24/36/48vdc 50/60Hz
 Color: Black
 Ip Grade: Ip20
 Temperature: -20°C-50°C
 Cut-out: Wide40mm High 70mm

LI-NRH-N pre-bury track



Input Voltage: 24/36/48vdc 50/60Hz
 Color: Black
 Ip Grade: Ip20
 Temperature: -20°C-50°C
 Cut-out: Wide40mm High 70mm

LI-NRL ultra-thin pre-bury track


Input Voltage: 24/36/48vdc 50/60Hz
 Color: Black
 Ip Grade: Ip20
 Temperature: -20°C-50°C
 Cut-out: Wide50mm High 100mm

LI-NSL ultra-thin surface mounted track





Input Voltage: 24/36/48vdc 50/60Hz
 Color: Black
 Ip Grade: Ip20
 Temperature: -20°C-50°C
 Cut-out: Wide50mm High 100mm


Installation




Pre-bury



Recessed



Surface Mounted




Pendent

Conner connector




LI-NCZO1 connector



LI-NLCO1 connector




LI-NLC-WO1 connector



LI-NCZO2 connector

LED Track Spotlight



CRI 90

CCT 3000K / 3500K / 4000K / 5700K

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NSL3055	Aluminum	3V	3W	24° / 36°	IP20
LI-NSL3055-D	Aluminum	6V	3W*2	24° / 36°	IP20
LI-NSL3055-T	Aluminum	9V	3W*3	24° / 36°	IP20



LI-NSL3055




LI-NSL3055-D



LI-NSL3055-T

LED Track Spotlight



CRI

90

CCT

3000K / 3500K / 4000K / 5700K



LI-NSL3080



LI-NSL3080-D



LI-NSL3080-T

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NSL3080	Aluminum	12V	5W	24° / 36°	IP20
LI-NSL3080-D	Aluminum	24V	5W*2	24° / 36°	IP20
LI-NSL3080-T	Aluminum	36V	5W*3	24° / 36°	IP20

CRI

90

CCT

3000K / 3500K / 4000K / 5700K




LI-NSL4068




LI-NSL4068-D

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NSL4068	Aluminum	18V	6W	24° / 36°	IP20
LI-NSL4068-D	Aluminum	18V	6W*2	24° / 36°	IP20

LED Track Spotlight



LED Track Spotlight

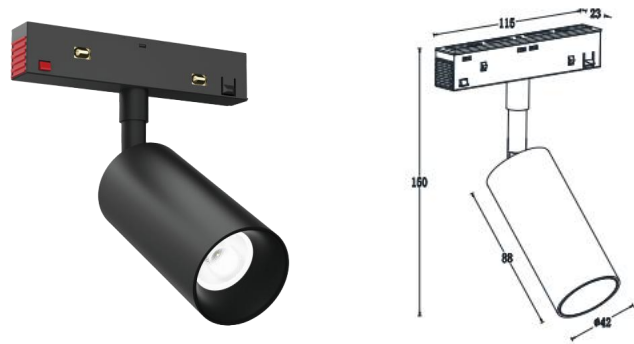

CRI 90

CCT 3000K / 3500K / 4000K / 5700K



Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NSL4088	Aluminum	18V	8W	24° / 36°	IP20
LI-NSL4088-D	Aluminum	18V	8W*2	24° / 36°	IP20

CRI 90

CCT 3000K / 3500K / 4000K / 5700K




Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NSL5288	Aluminum	18V	10W	24° / 36°	IP20
LI-NSL5288-D	Aluminum	36V	10W*2	24° / 36°	IP20

LED Track Spotlight



LED Track Spotlight

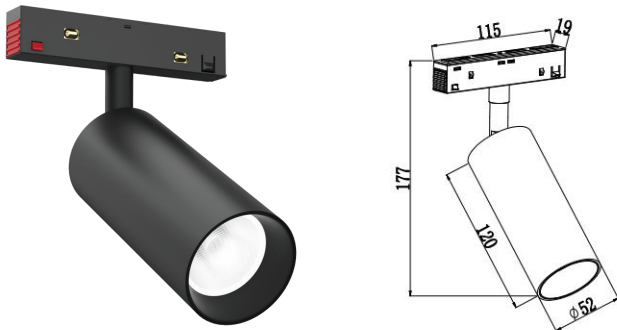

CRI

90

CCT

3000K / 3500K / 4000K / 5700K



LI-NSL52120



LI-NSL52120-D

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NSL52120	Aluminum	16V	12W	24° / 36°	IP20
LI-NSL52120-D	Aluminum	36V	12W*2	24° / 36°	IP20

CRI

90

CCT

3000K / 3500K / 4000K / 5700K

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
----------	----------	---------	-------	------------	-----------

LI-NSL 10055

Aluminum


36V

15W


15° / 24°

IP20

LED Track Spotlight

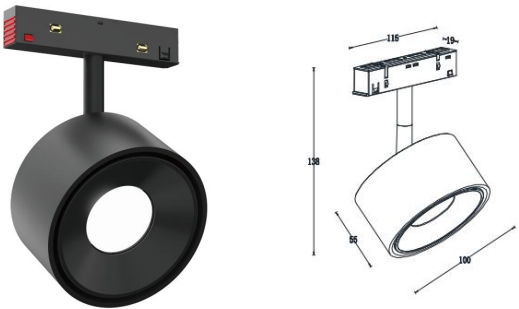

LED Track Spotlight



CRI

90

CCT

3000K / 3500K / 4000K / 5700K

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NSL60135	Aluminum	36V	20W	15° / 24°	IP20

CRI


90

CCT

3000K / 3500K / 4000K / 5700K

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NSL70147	Aluminum	36V	25W	15° / 24°	IP20

LED Track Spotlight





LED Track Grille Light




CRI

90

CCT

3000K / 3500K / 4000K / 5700K

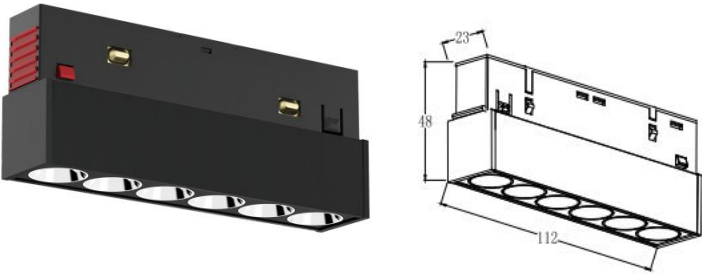

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NGL110	Aluminum	18V	6W	24° / 40°	IP20

CRI


90

CCT


3000K / 3500K / 4000K / 5700K

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NGL220	Aluminum	18V	12W	24° / 40°	IP20

LED Track Grille Light

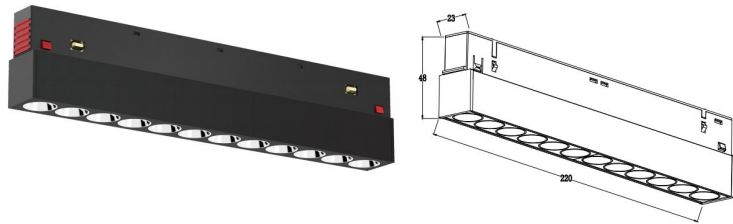

LED Track Grille Light

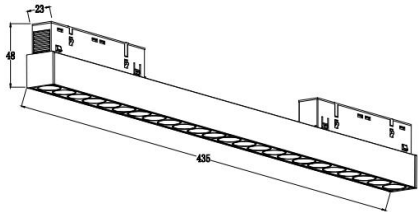

CRI

90

CCT

3000K / 3500K / 4000K / 5700K

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NGL435	Aluminum	36V	24W	24° / 40°	IP20

CRI



90

CCT

3000K / 3500K / 4000K / 5700K


Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NGL870	Aluminum	36V	30W	24° / 40°	IP20

LED Track Grille Light

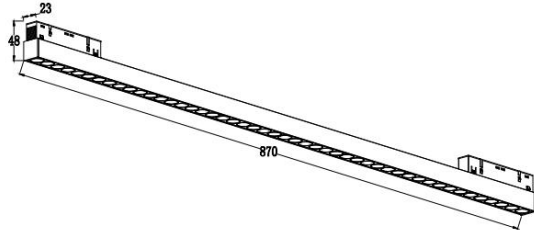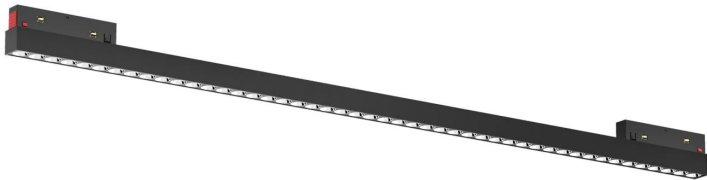



LED Track Tilttable Grille Light

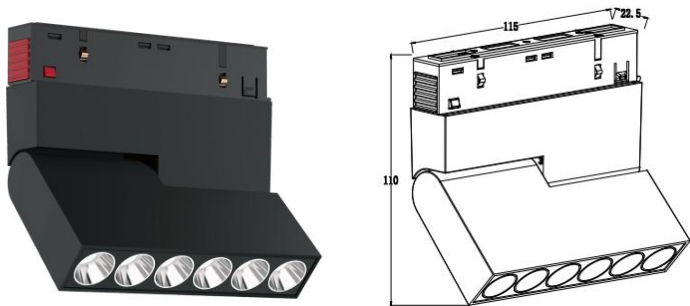

CRI 90

CCT 3000K / 3500K / 4000K / 5700K


Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NRG110	Aluminum	18V	6W	24° / 40°	IP20

CRI 90


CCT 3000K / 3500K / 4000K / 5700K

Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NRG220	Aluminum	18V	12W	24° / 40°	IP20

LED Track Tilttable Grille Light

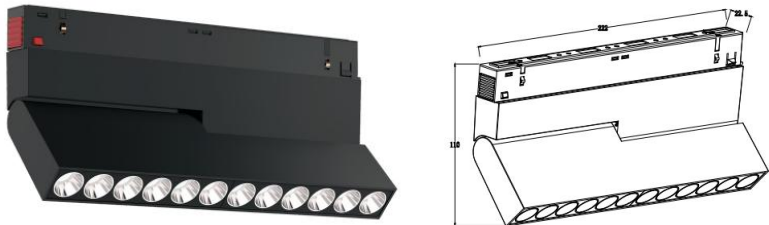

LED Track Flood Light

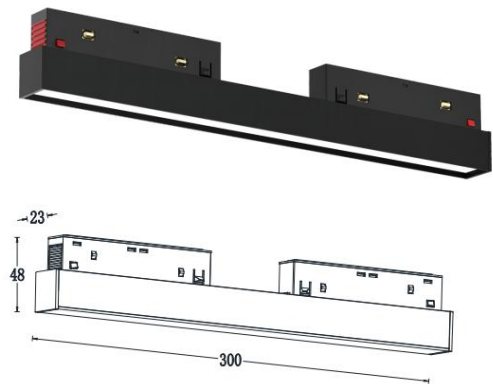

CRI 90

CCT 3000K / 3500K / 4000K / 5700K

Code No.	Material	Voltage	Power	Beam Angle	IP Rating	Length
LI-NFL300	Aluminum	18V	5W	110°	IP20	300mm
LI-NFL600	Aluminum	18V	10W	110°	IP20	600mm
LI-NFL900	Aluminum	36V	15W	110°	IP20	900mm
LI-NFL1200	Aluminum	36V	20W	110°	IP20	1200mm


CRI 90

CCT 3000K / 3500K / 4000K / 5700K




Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NML02	Aluminum	6V	6W	15°	IP20
LI-NML04	Aluminum	12V	12W	15°	IP20


LED Track Spotlight

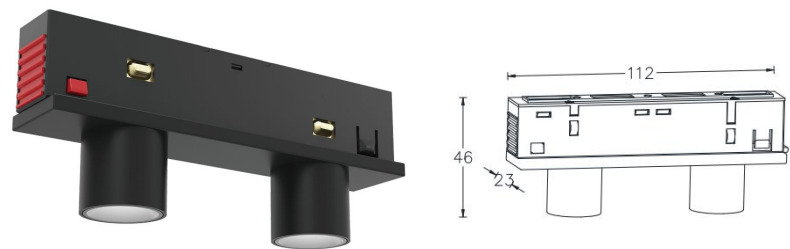

LED Track Pendant Light

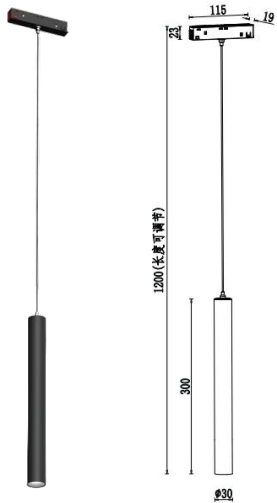

CRI 90 **CCT** 3000K / 3500K / 4000K / 5700K




Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NHT30300	Aluminum	18V	5W	24°	IP20
LI-NHT30300-D	Aluminum	18V	5W*2	24°	IP20
LI-NHT30300-T	Aluminum	18V	5W*3	24°	IP20

CRI 90 **CCT** 3000K / 3500K / 4000K / 5700K



Code No.	Material	Voltage	Power	Beam Angle	IP Rating
LI-NHT50300	Aluminum	18V	5W	24°	IP20
LI-NHT50300-D	Aluminum	18V	5W*2	24°	IP20
LI-NHT50300-T	Aluminum	18V	5W*3	24°	IP20

LED Track Spotlight

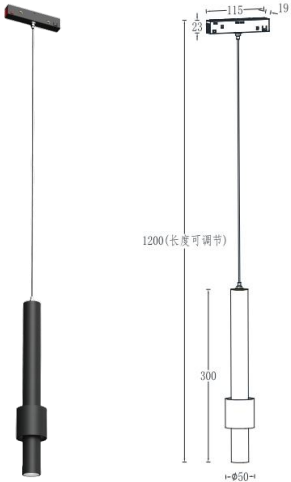

TP204 Series Track & Accessories



Round Corner Track
R 5CM/10CM/20CM/30CM
50CM/90CM



LI-NSH-N
Surface mounted track
24/36/48V




LI-NEH-A
Recessed track
24/36/48V



LI-NRH-N
Pre-bury track
24/36/48V



LI-NRL
Ultra-thin pre-bury track
24/36/48V



LI-NSL
Ultra-thin surface mounted track
24/36/48V




LI-NCZO1
connector



LI-NLCO1
connector



LI-NLC-WO1
connector



LI-NCZO2
connector

**HIGH VOLTAGE
LED TRACK
LIGHT**

HV34 Series


AC220V | 34MM

Beyond Light, To the Last Details..



Premium Aluminum Craftsmanship

Crafted from high-quality die-cast aluminum with a refined matte texture, this series delivers a perfect balance of durability and design. Every detail reflects Illus Lighting’s commitment to timeless style and true material quality.


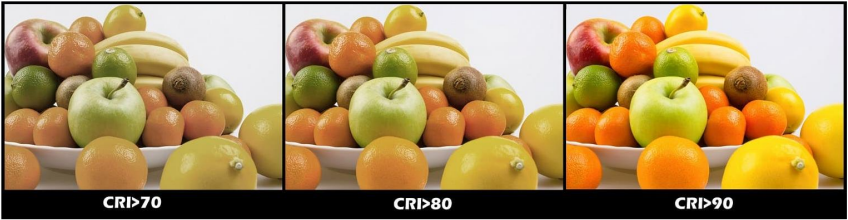


The LED Track Light with a high CRI of 90 ensures accurate color rendering, vibrant visuals, and enhanced lighting quality for professional and aesthetic spaces.

CRI > 90

Tailored Lighting Experience

Illus offers customized lighting solutions to match any environment. Choose from 3000K, 4000K, or 6000K color temperatures to create the desired ambiance — from cozy warmth to crisp clarity — all precisely designed for your space.

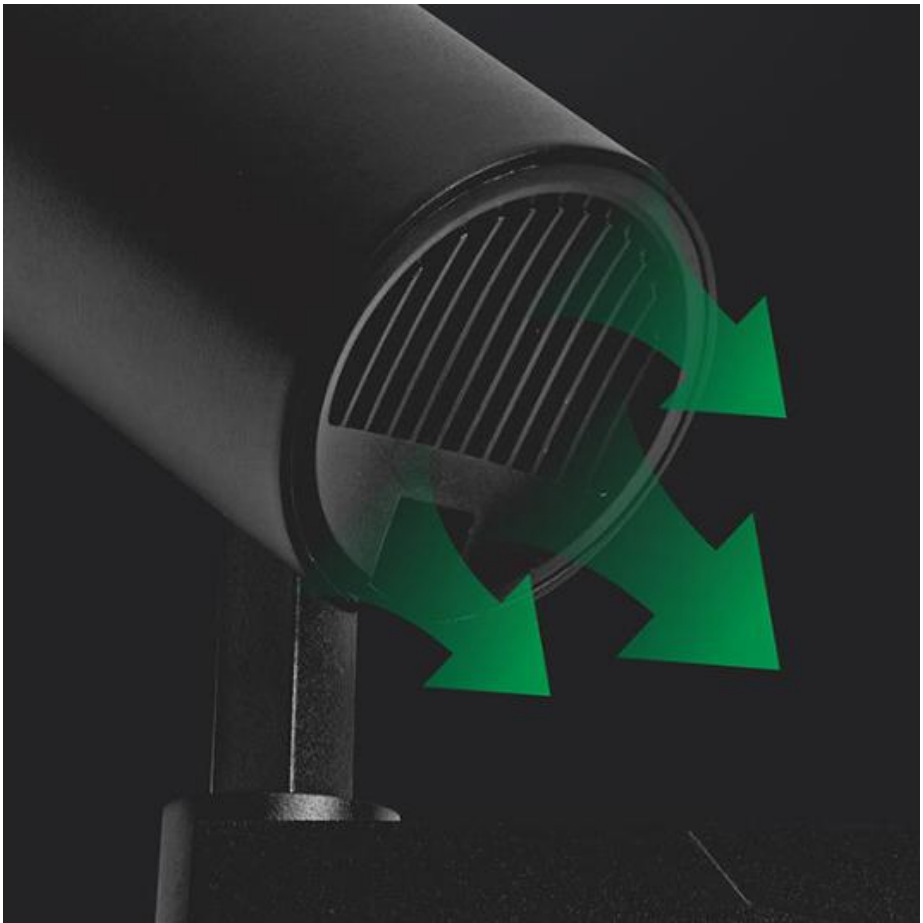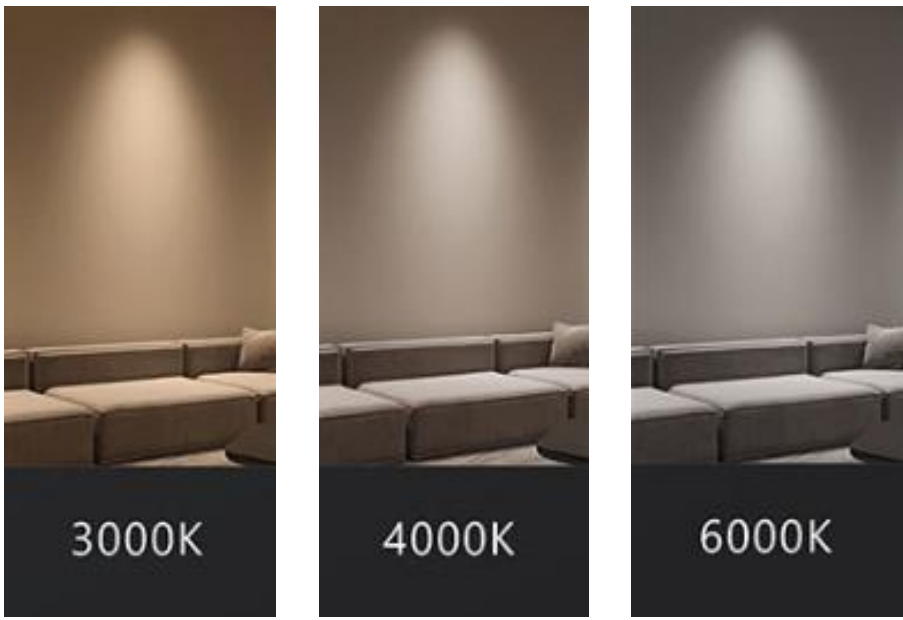

Engineered with an optimized air convection structure, the fixture ensures efficient heat management and stable performance. The robust cooling system extends the product’s lifespan while maintaining consistent light output.

Advanced Heat Dissipation Design

LED Track Spotlight



Code No.	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-TRS004	AC220V	12W	3000K/ 4000K/ 6000K	15°/ 24°/ 36°	180*75*1655mm
LI-TRS004	AC220V	24W	3000K/ 4000K/ 6000K	15°/ 24°/ 36°	180*75*1655mm
LI-TRS004	AC220V	35W	3000K/ 4000K/ 6000K	15°/ 24°/ 36°	190*85*205mm

CRI 90

IP20



Code No.	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-TRS002	AC220V	18W	3000K/ 4000K/ 6000K	10°/20°/30°	100*100*130mm

LED Track Spotlight



LED Track Flood Light



90



IP20

Code No.	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-TRS005	AC220V	20W	3000K/ 4000K/ 6000K	120°	35*60*350mm

CRI 90

IP20



Code No.	Voltage	Power	CCT	Beam Angle	Size (mm)
LI-TRS003	AC220V	12W	3000K/ 4000K/ 6000K	24°/36°	80*80*420mm

LED Track Pendant Light



HV34 Series Track & Accessories



LI-TRS006
Track Rail
W34*L1000*14.5MM
White / Black



LI-TRS007
Direct connector
White / Black



LI-TRS008
T connector
White / Black



Our Services



Showrooms(35+) opened in Spain, China, KSA, Dubai, Kuwait, Qatar and Oman



Illus owns the switches and sockets brand ilict and the smart products brand Hypnotek apart from illuminaries

What Can Comprehensive Multi-Brand Solutions Do for Your Business?



HYPNOTEK ilict



Choice for different price ranges to meet your budgets



We can also help to source what we don't produce with our QC requirement to ensure you one-stop solution


What Can We Do for **Distributors?**



How to Offer Support on **Projects**?



Illus Lighting

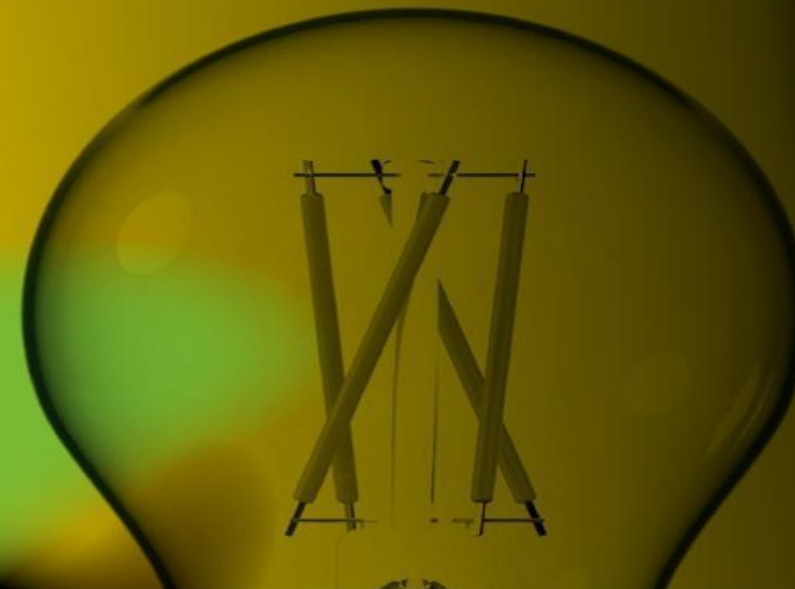

Contact us

 Website:
www.illuslighting.com

 Email:
global@illuslighting.com

 WhatsApp:
+86 18664429036



Search: Illus Lighting 

Where to Find us

- * Kingdom of Saudi Arabia-Head Office: 3533 Al Kharj rd, Al Aziziyah, riyaadh 14511
- * Illus Spain: 46970 Alaquàs, Valencia, Spain
- * Illus China: Star Alliance, No.68 Zhongxing Avenue, Guzhen, Zhongshan, Guangdong, China
- * Lighting Stores Kuwait: No 4, Opposite the city center entrance, 142 8 St, Shuwaikh industrial, Kuwait
- * Kingdom of Bahrain-Build Station: 7J3Q+R36, Arad, Bahrain
- * Build Station Qatar: Zone 43, Street 340, Salwa rd, doha, Qatar
- * Build Station Oman: 18 november Street 411 Muscat, Al Aziba, 130, Oman
- * Build Station UAE: 75 6th St - Al Quoz - dubai - United Arab Emirates